

(19)



(11)

EP 3 320 616 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

27.11.2024 Bulletin 2024/48

(21) Application number: **16822036.6**

(22) Date of filing: **08.07.2016**

(51) International Patent Classification (IPC):

H04B 1/00 ^(2006.01) **G06K 7/10** ^(2006.01)
G01R 19/25 ^(2006.01) **H04B 1/408** ^(2015.01)
H04B 1/38 ^(2015.01) **H04B 1/403** ^(2015.01)
H04B 1/44 ^(2006.01) **H04B 1/59** ^(2006.01)
H04B 17/364 ^(2015.01)

(52) Cooperative Patent Classification (CPC):

G06K 7/10069; G06K 7/10009; H04B 1/0007;
G01R 19/2509; H02J 50/12; H02J 50/80

(86) International application number:

PCT/US2016/041504

(87) International publication number:

WO 2017/008011 (12.01.2017 Gazette 2017/02)

(54) **LOW LOSS ACOUSTIC WAVE SENSORS AND TAGS AND HIGH EFFICIENCY ANTENNAS AND METHODS FOR REMOTE ACTIVATION THEREOF**

VERLUSTARME SCHALLWELLENSENSOREN UND ETIKETTEN SOWIE HOCHEFFIZIENTE ANTENNEN UND VERFAHREN ZUR FERNAKTIVIERUNG DAVON

CAPTEURS À ONDES ACOUSTIQUES À FAIBLE PERTE, ÉTIQUETTES ET ANTENNES À HAUTE EFFICACITÉ AINSI QUE PROCÉDÉS POUR LEUR COMMANDE À DISTANCE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **08.07.2015 US 201562189936 P**

(43) Date of publication of application:
16.05.2018 Bulletin 2018/20

(73) Proprietor: **Sensanna Incorporated**
Arnold, MD 21012 (US)

(72) Inventors:

- **HINES, Jacqueline, H.**
Annapolis, MD 21409 (US)
- **HINES, Andrew, T.**
Annapolis, MD 21401 (US)
- **SOLIE, Leland, P.**
Apopka, FL 32712 (US)
- **KIRKPATRICK, Doug**
San Francisco, CA 94114 (US)

(74) Representative: **EP&C**

P.O. Box 3241
2280 GE Rijswijk (NL)

(56) References cited:

US-A- 6 121 892 US-A1- 2006 192 002
US-A1- 2006 267 733 US-A1- 2009 206 844
US-A1- 2010 060 429 US-A1- 2012 197 558
US-A1- 2014 167 740

- **ROBERT W. BROCATO ET AL: "Re-configurable Completely Unpowered Wireless Sensors", ELECTRONIC COMPONENTS AND TECHNOLOGY CONFERENCE, 2007. ECTC &APOS;07. PROCEEDINGS. 57TH, 31 January 2007 (2007-01-31), Pi, pages 179 - 183, XP055566496, ISBN: 978-1-4244-0984-6, DOI: 10.1109/ECTC.2007.373795**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 320 616 B1

- HAUSER H ET AL: "WIRELESSY INTERROGABLE MAGNETIC FIELD SENSOR UTILIZING GIANT MAGNETO-IMPEDANCE EFFECT AND SURFACE ACOUSTIC WAVE DEVICES", IEEE TRANSACTIONS ON INSTRUMENTATION AND MEASUREMENT, IEEE SERVICE CENTER, PISCATAWAY, NJ, US, vol. 49, no. 3, 30 June 2000 (2000-06-30), pages 648 - 652, XP000937379, ISSN: 0018-9456, DOI: 10.1109/19.850409

Description

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 62/189,936, filed July 8, 2015.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The field of the present invention relates to surface-launched acoustic wave devices, including surface acoustic wave devices or SAW devices. The field of the present invention also relates to antennas for use with SAW devices, and the application of SAW devices and related methods for performing measurements on electric and magnetic fields.

Description of Related Art

[0003] Acoustic Wave Sensors: Sensors based on surface-launched acoustic wave (known as surface acoustic wave or SAW) devices have been developed since the 1980's for application to physical measurements (temperature, pressure, torque, strain, etc.) and to a wide range of chemical and biological detection problems. These widely varying devices have been described in detail in the open literature, including the following: U.S. Patent No. 7,268,662, entitled Passive SAW-based hydrogen sensor and system, U.S. Patent No. 7,434,989, entitled SAW temperature sensor and system, U.S. Patent No. 7,500,379, entitled Acoustic wave array chemical and biological sensor U.S. Patent No. 7,791,249, entitled Frequency coded sensors incorporating tapers, U.S. Patent No. 8,094,008, entitled Coded acoustic wave sensors using time diversity, U.S. Patent No. 8,441,168, entitled SAW Sensor tags with enhanced performance, U.S. Patent No. 9,121,754, entitled Surface Acoustic Wave Deposition Monitor for Ultra-Thin Films, U.S. Utility Application No. 13/679,607 (US20130130362A1), entitled Power Spectral Density Chemical and Biological Sensor, and U.S. Utility Application No. 13/694,889 (US20130181573A1), entitled Individually Identifiable Surface Acoustic Wave Sensors, Tags, and Systems.

[0004] Acoustic Wave Sensor Interrogation Systems: Acoustic wave sensor devices have been operated within a wide range of wired and wireless interrogation system architectures, which have generally been designed specifically to operate with the selected sensor(s). The system architecture is usually selected based on specific device characteristics and application requirements, and generally involves absolute or differential measurements of sensor frequency, phase, delay, amplitude, or power spectral density, and changes in these quantities with exposure to changes in target parameters, to provide the output sensor measurement. Conventional wireless interrogation system architectures include pulsed radar-

like delay measurement systems, Fourier transform based measurement systems, delay line and resonator-based oscillator systems, and time integrating correlator based interrogation systems. Radio architectures include conventional homodyne and heterodyne mix-down systems, and direct (to baseband or to near-baseband) conversion systems. Software defined radio implementations of selected interrogation systems can be advantageous, in terms of flexibility and performance.

[0005] SAW multistrip couplers: Multistrip couplers (MSCs) are broadband, low loss directional couplers that operate on freely propagating surface acoustic waves in substrates with high electromechanical coupling coefficients. These components have been understood since the early 1970's, as described by Marshall, Newton, and Paige in "Theory and Design of the Surface Acoustic Wave Multistrip Coupler," IEE Transactions on Sonics and Ultrasonics, Vol. SU-20, No. 2, April 1973, pp. 124-133 and in "Surface Acoustic Wave Multistrip Components and Their Applications," IEE Transactions on Sonics and Ultrasonics, Vol. SU-20, No. 2, April 1973, pp. 134-143. MSCs have been widely used in SAW filters and delay lines. However, advantages possible using MSCs in SAW sensors and sensor-tags have not been recognized in work found in the open literature. MSC elements can be used to redirect the acoustic beam, to transfer acoustic energy from one track to another, to distribute the acoustic signal between a number of tracks, to enhance the operation of tapped delay lines, to reflect the acoustic signal (including creating low loss nearly ideal acoustic 'mirrors' that reflect broadband acoustic signals at a single point), for suppression of triple transit, suppression of bulk waves and spurious signals (as discussed by Danicki in "Bulk Wave Transmission by a Multistrip Coupler (MSC)," Archives of Acoustics, 1998, pp. 125-137), and frequency modulation (among other functions), to produce high rejection and/or low loss SAW devices, other desirable SAW device responses, and to perform numerous other useful functions.

[0006] A few useful MSC configurations found in the open literature are illustrated here for reference. First, Figure 1 shows a SAW device **100** with a straight MSC **102** that is placed between an apodized transducer **104** in a first (upper) acoustic track (apodization referring to the spatially varying overlap lengths between electrodes of opposite polarities) and an unapodized transducer **106** in a second (lower) acoustic track. Voltages produced by the SAW in the upper track are intercepted by the MSC and are transferred to and spread uniformly across the lower track, generating a corresponding surface wave in the lower track. If the number of strips in the MSC is selected properly, the SAW launched to the right by the apodized transducer will be coupled over to the lower acoustic track with 100% efficiency. Bulk waves propagating in the upper acoustic track will continue to propagate in a straight line, unaffected by the MSC, and any interference they may have caused will be eliminated. Also, the MSC effectively spreads the acoustic energy

from the apodized transducer over a uniform, full aperture when launching the wave towards the second transducer. Thus, it is well known in the art that a MSC can be used between two apodized transducers that would not normally be cascaded in-line in a single acoustic track. By adjusting the number of strips, the amount of energy that is transferred from the upper to the lower track can be adjusted. Different numbers of strips are required to effect a given % energy transfer between tracks on different substrates as well, based on the electromechanical coupling coefficients of the materials involved. The phase shift experienced by the SAW being transferred is also dependent on the number of strips and substrate material, in a manner that makes the phase shift between tracks related to the percent of energy transferred. For 100% transfer, the SAW generated in the lower track will have a 180° phase shift relative to the SAW in the upper track, while for 50% energy transfer, the phase shift between tracks is 90°.

[0007] There can be variations of the straight MSC, including phase offsets introduced by jogging (or offsetting) the lines in different acoustic tracks, transferring from one track into more than one track (of the same or different acoustic apertures), and others. Figure 2 shows a modified version of the straight MSC wherein the center region of the MSC is splayed out. This region corresponds to the portion of the substrate between the acoustic tracks. Angling of the MSC traces in this region prevents acoustic waves from being launched in a direction collinear with the propagating acoustic waves in the upper and lower acoustic tracks in this unused region. Any launched waves would instead be launched off-angle.

[0008] A second known MSC structure that is useful is the U-shaped MSC. This structure can be thought of as what would result if a straight MSC was stretched and bent around so that two ends aligned, as shown in Figure 3. The original straight MSC is a track changing MSC of known efficiency, so the SAW that would have been launched to the right in the lower track is now launched to the left in the U-shaped MSC. The spacing in the center of the two arms of the "U" is chosen to ensure that 100% of the signal is reflected to the left of the U shaped MSC. This structure produces a broadband reflector that effectively reflects 100% of a SAW incident from the left as if there was an ideal acoustic mirror in the space between the two arms of the U.

[0009] An alternate ring-shaped MSC reflector structure has certain benefits, discussed by Brown in "Low-Loss Device Using Multistrip Coupler Ring Configuration with Ripple Cancellation," IEEE Ultrasonics Symposium, 1986, pp. 71-76. Considering the bottom traces of the U-shaped MSC shown above, the curved regions of the traces correspond to portions of the MSC that do not contribute to the production of SAWs in the desired acoustic track. Thus, the shorter these regions the better, but lithographic requirements necessitate a minimum separation space between adjacent traces, increasing size. In addition, since the spacing of the electrodes will

be on the order of 40% of an acoustic wavelength for the SAW of interest, when a SAW passes under the MSC and the first electrode is near maximum SAW voltage, the adjacent electrode will be near a minimum voltage. Adjacent electrodes at alternating polarities will introduce considerable inter-trace capacitance, which will alter the performance of the MSC. An alternative ring-shaped MSC reflector is shown in Figure 4, where the curved (or in this case segmented line) trace sections that connect two traces on either side of the U are alternated so that every other curved section is on the opposite end of the MSC. This changes the "U" shape to a ring, and ensures that most of the curved segments at the top are one polarity while most at the bottom are the other polarity, substantially reducing the inter-trace capacitance introduced by these sections of the traces. "Most" is used in this description, since the non-synchronous nature of the trace spacings relative to the SAW wavelength means that the polarity within each end (top and bottom) will slowly vary within that region. But the improvement in performance is significant.

[0010] SAW sensors incorporating dispersive elements: Dispersive elements such as chirp transducers have long been used in SAW signal processing devices such as radar expander/compressor pairs. These elements have also been used in SAW sensors, as discussed in U.S. Patent No. 8,441,168, entitled SAW Sensor tags with enhanced performance. Chirp elements enable realization of processing gain, which can be effected on the SAW die, or can be distributed to different portions of the system. Pulse compression occurs when an up-chirp signal is convolved with a downchirp (or vice versa). Alternate frequency coded pulses can also be used to produce pulse compression. Chirp pulse compression takes a signal that contains frequency components from F_{low} to F_{high} (i.e., with a bandwidth $B = F_{\text{high}} - F_{\text{low}}$) within a time length T , and by convolving it with a device with the opposite chirp slope (i.e., if the input signal is an up-chirp the compression filter is a downchirp and vice versa), transforms the signal in to a narrow pulse of duration $t \approx 1/B$ with voltage amplitude increased by $\sqrt{BT}$. In SAW devices, it is quite easy to realize BT products of 50, 100, 200, or even more, which can produce significant processing gain.

[0011] SAW Sensor-tags: SAW devices have been used as wireless interface devices to external voltage producing or impedance varying sensors, as discussed in U.S. Patent No. 8,441,168, entitled SAW Sensor tags with enhanced performance. SAW sensor-tag interface devices enable the wireless reading of (batteryless or passive) sensors that normally are operated in powered, wired systems. SAW wireless interface devices, which can be individually identifiable, or RFID-enabled, are referred to as SAW sensor-tags or SAW sensor-tag wireless interface devices. Brocato, in "Passive Wireless Sensor Tags," Sandia Report SAND2006-1288, Sandia National Laboratories, Albuquerque, New Mexico 87185, March 2006, demonstrated that a SAW differential delay

line could be used, with a sensor that changes impedance with measured quantity attached electrically in parallel with a reflector in one of the paths, to measure variations in the attached sensor. Other researchers have also demonstrated similar devices, including those described by Reindl et al. in "Theory and Application of Passive SAW Radio Transponders as Sensors," IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control, Vol. 45, No. 5, September 1998, pp. 1281-1292; Scholl et al. in "Wireless Passive SAW Sensor Systems for Industrial and Domestic Applications," Proceedings of the 1998 IEEE International Frequency Control Symposium, p. 595-601; and Schimetta et al. in "A Wireless Pressure-Measurement System Using a SAW Hybrid Sensor," IEEE Transactions on Microwave Theory and Technique, Vol. 48, No. 12, December 2000, pp. 2730-2733.

[0012] More recently, a range of RFID enabled, dispersive, half-dispersive, and non-dispersive SAW wireless interface devices have been demonstrated that can be used to read a wide range of external sensors and devices, including switches, RTDs, thermistors, strain gauges, and acoustic emission sensors. Methods have been shown for adapting SAW sensors to operate with external sensors with impedances (Z) having real parts $\text{Re}(Z)$ varying from low ($\sim 20 \Omega$) resistance to moderately high (over 5 k Ω) resistance, the latter being devices that normally would not interface well with SAW devices. This work is described in the final report for NASA SBIR Phase I contract NNX09CE49P (July 22, 2009). For voltage generating external sensors (such as AE sensors, thermocouples, etc.), the external sensor voltage is applied as the gate voltage on a zero-bias (normally ON) field effect transistor (FET).

[0013] U.S. patent application 2012/0197558 A1 discloses a system for measuring current on power lines indirectly by using wireless temperature sensors mounted on bare power lines to measure conductor (line) temperature, and converting line temperature into rms current using conversion formulas or tables that relate measured temperature to current for the specific type of conductors being measured. This application also discloses a Current Measurement Unit (CMU) that is mounted remote from the power line (for example, on a pole, at least 2-3 meters below the conductors), with a digital Hall effect switch providing a detector for outages on all three phases of a power line.

[0014] U.S. patent application 2009/0206844 A1 discloses an acoustic wave sensor employing an electromagnetic device (EMD) to transduce and amplify the response of an impedance element to a physical measurement. One embodiment uses a magnetic field sensor employing a microelectromechanical system (MEMS) capacitor to affect a change in the response of a SAW filter.

[0015] The Article "Re-Configurable Completely Unpowered Wireless Sensors", Proceedings of the 57th Electronic Components and Technology Conference, pages 179-183, 2007. Brocato et. al. describes use of

high impedance electronic components such as field effect transistors (FETs), including MOSFET and JFET devices, to interface low impedance SAW transducers to high impedance sensors, to allow remote reading of very high impedance sensors through SAW wireless interface devices.

[0016] The article "Wirelessly Interrogable Magnetic Field Sensor Utilizing Giant Magneto-Impedance Effect and Surface Acoustic Wave Devices", IEEE Transactions on Instrumentation and Measurement, Vol. 49, No. 3, pages 648-652, June 2000, Hauser et. al. describes a magnetic field sensor in which a giant magneto-impedance (GMI) wire is used as an external sensor attached to a SAW device transducer to measure magnetic field. In this configuration, a magnetic field induces a change in the impedance of the GMI sensor wire, which in turn modulates the amplitude and/or phase of the SAW reflection.

SUMMARY OF THE INVENTION

[0017] The present invention provides for SAW sensor and sensor-tag device embodiments that exhibit lower loss and/or enhanced time diversity performance relative to conventional systems. Antennas suitable for efficient operation in conductive media are provided. Sensors that can measure electric current and scaled voltage (through measurement of the magnetic field and electric field, respectively) are also disclosed.

[0018] Low-loss differential delay line SAW sensors using MSC elements: Conventional SAW differential delay line sensors often utilize SAW transducer and reflector elements and die layouts that result in loss mechanisms that include bidirectional loss from the transducers, inefficiency in reflector operation, and power division loss due to multiple acoustic tracks. All of these factors tend to reduce the signal strength of each reflected sensor response relative to the input signal strength. This negatively impacts the signal to noise ratio (S/N) and reduces the wireless range over which such devices can be read using a given radio and set of antennas. Higher loss can also negatively impact the accuracy of measurements produced by the sensor and sensor-tag devices, for a given radio interrogation system. The present invention teaches the use of MSC elements in novel device embodiments that produce devices with lower loss relative to conventional devices.

[0019] Low-loss differential delay line SAW sensors with enhanced time diversity: Time diversity is a property of sets of SAW sensors and tags that provides for each device to respond within a separate, distinct time range when the set of devices is activated by a common radio frequency (RF) interrogation pulse. The present invention teaches SAW sensor and sensor-tag device embodiments that incorporate dispersive and/or MSC elements to produce responses that are shorter in time and lower loss than conventional devices capable of producing an equivalent number of separately detectable responses.

These properties enable construction of sets of passive wireless sensors that have more time diversity within a given total time length, enabling production of sensor systems with more sensor or sensor-tag devices simultaneously operable without inter-device interference. The lower loss of devices according to the present invention either increases the wireless range with which the devices can be read, or improves the accuracy of measurements produced by each device, or a combination of both.

[0020] Inductive coupling and resonant magnetic coupling for remote reading of SAW sensors: Most conventional wireless SAW sensors have been activated via conventional radiative antennas, which interact via propagating, time varying electromagnetic signals. Such antennas do not function properly when mounted on metal surfaces, or when immersed in conductive media. Some SAW devices for use in liquids have been demonstrated that use inductive coupling to activate the SAW device wirelessly at short range (up to a cm or two). The present invention teaches the use of resonant magnetic antennas for remote activation and reading of SAW sensors and sensor-tags, over longer-range, in highly metallic environments, and/or when immersed in conductive media.

[0021] Wireless measurement of current and voltage: The present invention teaches devices, apparatuses, systems, and methods involving the use of field probes with FETs and SAW sensor-tag wireless interface devices to measure voltage and current in current carrying conductors (CCCs) via measurement of the electric fields and magnetic fields around said CCCs. The present invention also teaches devices, apparatuses, systems, and methods for determining the relative phase (leading or lagging) of the current and voltage in AC power systems, thereby providing the information necessary to determine power factor. Such information is useful, for example, in monitoring the condition of the power distribution grid.

[0022] Aspects of the present disclosure include an apparatus for wirelessly measuring the strength of electric and/or magnetic fields. The apparatus including one or more acoustic wave sensor or sensor-tag devices, at least one transistor, at least one field probe operable to interact with the field being measured and produce a voltage, and one or more antennas.

[0023] Further aspects of the present disclosure include a surface acoustic wave sensor tag device. The device includes a piezoelectric substrate, at least one first transducer arranged on at least a portion of said piezoelectric substrate, and at least one second surface acoustic wave element formed on said piezoelectric substrate and spaced from said first transducer along the direction of acoustic wave propagation, wherein said at least one second surface acoustic wave element includes at least one multistrip coupler (MSC).

[0024] Additional aspects of the present disclosure include an antenna for remote activation and reading of SAW sensors. The antenna includes at least one pair of magnetic coupling elements operable to create a mag-

netic resonance therebetween, wherein said at least one pair of magnetic coupling elements can transfer energy and data to and from SAW devices immersed in conductive materials.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] The present invention will be understood more fully from the detailed description given below and from the accompanying figures and drawings of various embodiments of the invention, which, however, should not be taken to limit the invention to the specific embodiments, but are for explanation and understanding only.

Figure 1 shows a schematic representation of a conventional SAW device incorporating a straight track-changing MSC.

Figure 2 shows a schematic representation of a modified straight MSC that has a center region (between the acoustic tracks) where the traces have been angled to prevent acoustic waves from being launched collinear to the waves in the upper and lower acoustic tracks.

Figure 3 shows a straight MSC being bent to produce a conventional U-shaped MSC.

Figure 4 shows a conventional ring shaped MSC.

Figure 5 shows a partial view of a photomask layout for a set of differential delay line SAW sensors that utilize conventional SAW transducer and reflector elements.

Figure 6 shows a schematic representation of a low-loss SAW differential delay line sensor incorporating ring type MSCs according to aspects of the present disclosure.

Figure 7 shows a schematic representation of another embodiment of a low-loss SAW differential delay line sensor incorporating ring type MSCs and more than one acoustic track according to aspects of the present disclosure.

Figure 8 shows a schematic representation of an embodiment of a two acoustic track low-loss SAW differential delay line combined sensor and sensor-tag device incorporating both ring type MSCs and external impedance varying device(s) according to aspects of the present disclosure.

Figure 9 shows a schematic representation of a low-loss SAW differential delay line sensor embodiment incorporating track changing MSCs and ring type MSCs according to aspects of the present disclosure.

Figure 10 shows a schematic representation of a low-loss SAW differential delay line SAW sensor embodiment according to aspects of the present disclosure.

Figure 11 shows another schematic representation of a low-loss SAW differential delay line sensor embodiment according to aspects of the present disclosure.

Figure 12A shows a schematic representation of an additional SAW device according to aspects of the present disclosure.

Figure 12B shows a schematic representation of an additional SAW device according to aspects of the present disclosure.

Figure 12C shows a schematic representation of an additional SAW device according to aspects of the present disclosure.

Figure 13 shows a schematic representation of a low-loss SAW device with dispersive elements and track changing MSC reflectors that uses pulse compression according to aspects of the present disclosure.

Figure 14 shows a schematic representation of a low-loss differential delay line SAW sensor with dispersive elements and track changing reflective MSC elements that uses pulse compression according to aspects of the present disclosure.

Figure 15 shows a schematic representation of a device with track changing MSCs and ring-shaped MSC reflector elements and dispersive elements that uses pulse compression according to aspects of the present disclosure.

Figure 16 shows a schematic representation of a compact, single acoustic track low loss differential delay line sensor using pulse compression according to aspects of the present disclosure.

Figure 17A shows a cut-away view of the interior of a voltage and current monitoring system according to aspects of the present disclosure.

Figure 17B shows the mechanical housing enclosing the conductor for the system shown in Figure 17A according to aspects of the present disclosure.

Figure 18 shows the system of Figures 17A and 17B in operation on a three phase power line according to aspects of the present disclosure.

Figure 19 shows a schematic representation of a wireless, batteryless SAW current sensor-tag assembly according to aspects of the present disclosure.

Figure 20 shows a schematic representation of a wireless, batteryless SAW voltage sensor-tag assembly according to aspects of the present disclosure.

Figure 21 shows a SAW wireless interface device configuration with multiple FETs for use in monitoring current (magnitude and direction) and voltage (magnitude and polarity) according to aspects of the present disclosure.

Figure 22 shows the circuit of Figure 21 with added transient voltage suppression (TVS) devices across the two leads of the field probe according to aspects of the present disclosure.

vices, apparatuses, systems, and methods for effectively increasing the signal strength (i.e., reducing the loss) and/or providing enhanced time diversity performance of SAW sensor and sensor-tag devices relative to conventional devices. Antennas suitable for efficient operation in conductive media are disclosed. Sensors that can measure current and scaled voltage (through measurement of the magnetic field and electric field, respectively) are also disclosed.

[0027] Low-loss differential delay line SAW sensors using MSC elements: Conventional SAW differential delay line sensors utilize bidirectional transducers with ordinary reflectors that are either short circuited or open circuited transducers or arrays of electrodes. The partial mask layout shown in Figure 5 illustrates an array of devices (or die) such as the one labeled **200**, each with two input transducers **202** (on the left end of each die) that are electrically fed in parallel, and two ordinary reflectors located **204** at different distances and hence at different acoustic delays to the right SC and OC in the labels on each die indicate short circuit and open circuit reflectors, respectively. These devices suffer from loss mechanisms that include bidirectional loss from the transducers and inefficiency in reflector operation. In addition, feeding two transducers in parallel causes a power division 'loss', reducing the signal strength in each acoustic path relative to the input signal strength. Unidirectional transducers can be used to reduce the bidirectional loss, as they send and receive acoustic waves in only one direction.

[0028] Selected disclosed apparatuses, devices, systems, and methods use ring-shaped MSC reflectors such as those described above to provide reflectors that are nearly 100% efficient, significantly reducing the losses due to inefficient reflectors. An added benefit of using these reflectors is that the reflected SAW response is not broadened in time by the reflector as would be the case with a normal reflector. The reflected response appears as if it were reflected from a nearly ideal mirror located at the center of the ring MSC reflector. This is beneficial for SAW sensors utilizing time diversity as one factor in device identification. Some device embodiments are provided below.

[0029] The first embodiment, shown schematically in Figure 6, is a simple differential delay line using a bidirectional transducer and two ring MSC reflectors located on either side. The SAW device **210** includes a transducer **212** located between two ring MSC reflectors **214**, which are located at different distances from the transducer. When impulsed, this device will produce two responses at different delays, determined by the round trip spacing between the transducer and each reflector and the acoustic wave velocity. Clearly, this structure can be modified in a number of ways to make useful sensors. The delays can be adjusted to produce two closely spaced responses that produce a bandpass response with one or more notches in the passband. Alternately, films or other surface treatments can be introduced onto

DETAILED DESCRIPTION OF THE INVENTION

[0026] Embodiments of the present invention teach de-

portions of the propagation path on one or more regions of the surface to produce sensors suitable for detection of chemical, biological, or other analytes. Physical die mounting and packaging techniques and other methods can also be used to adapt such a device to use as a physical sensor for an assortment of parameters. Construction of a device with multiple acoustic tracks, each containing a differential delay line such as that shown above, can produce sensors capable of making multiple measurements that are useful for many purposes. Addition of multiple transducers in the acoustic track (or tracks) can provide a means of connecting external sensors to the SAW die, providing a wireless interface device to said external sensor or sensors, while also potentially providing one or more SAW sensor measurements. This type of structure can be useful for measurement of multiple parameters, such as temperature (measured by the SAW die) and strain (measured by an external strain gauge and read through the SAW response or measured by the SAW die), voltage (measured by the SAW die or measured using a FET external to the SAW and read through the SAW die) and/or acceleration (read through the SAW as a wireless interface device). Various diversity techniques can be incorporated in these devices, including coding such as chirp/dispersive coding, direct sequence spread spectrum (DSSS) coding, and other known techniques.

[0030] Another embodiment is shown in Figure 7, where a two acoustic track device **220** with two transducers **222** on the left (which can be unidirectional transducers) launch SAWs towards two ring MSC reflectors **224**, which are located at different acoustic delays on the surface. Acoustic waves launched by the transducers propagate to the right on the die and are reflected back at time delays determined by the spacing of the SAW elements on the die surface, and the acoustic wave velocity. The transducers are shown sharing a common bus bar, but this is not required for device construction and operation. This can be extended to multiple tracks beyond two, and used with additional SAW elements such as transducers that can be connected to external sensors, or with ordinary reflectors that are partially reflective, to allow multiple responses from the region on one side of a transducer in one acoustic track. With multiple transducers in one acoustic track, these devices can be used in reflective mode, where the S11 response of the device is measured through one port attached to an antenna, or in a reflective transmission mode where the S21 response through two or more transducers attached to the same antenna is measured. For clarity, if the two (or more) input transducers are formed with busbars that are independent, one of these transducers can be used as the interface to the external sensor. Alternatively, other transducers can be added to serve this purpose.

[0031] Figure 8 shows just one example of a sensor-tag embodiment, where one transducer has been attached to an external impedance varying load. Voltage producing external sensors and other devices can also

be read using a FET as an interface device (see current and voltage sensing section below). In Figure 8, SAW device **230** includes three transducers **232**, one of which **234** is connected to an external impedance varying load **236**, and multiple (in this example four) U-shaped MSCs **238**.

[0032] Another MSC element is the track changing MSC. A simple SAW differential delay line sensor embodiment **240** that incorporates a track changing MSC element **242** is shown in Figure 9. In the configuration shown, one would normally construct the MSC **242** to be a 50% track changing coupler, so that half the acoustic energy propagating to the right in the upper track from transducer **244** continues on to the far MSC ring reflector **246**, while the other 50% changes to the lower track, where it reflects from the closer MSC ring reflector **248**. This type of track changing structure can be used on one side of a bidirectional transducer, or a two-sided device can be constructed with track changing MSCs on one or both sides. Other variations, such as track changing MSCs with unequal acoustic apertures, devices with more than two acoustic tracks, and track changing MSCs with delay offsets and/or subharmonic or harmonic spreading of the MSC traces are beneficial for certain purposes.

[0033] Figure 10 shows a schematic representation of a low-loss SAW differential delay line SAW sensor that incorporates both track changing MSCs and ring shape MSCs, in addition to transducers and reflectors of various kinds, resulting in folded acoustic tracks that have longer acoustic delays for some of the reflective SAW responses than would otherwise be possible for a SAW die of a given size using conventional devices. Specifically, Figure 10 shows five individual SAW die **250**. On each die a single transducer **252** acts as an input/output (I/O) transducer, launching acoustic waves upward and downward. The upward propagating wave is reflected by the reflector **254** at the upper right of the device (in this example, an apodized reflector with open circuited electrodes, although another die shows an unapodized reflector **256**). This reflected response returns to the launching transducer, providing a first response. The acoustic wave launched downward propagates to the MSC **258** below, which is a 50% track changing MSC. Half of this signal passes downward through the right of the MSC **258**, and reflects off the ring-shaped MSC reflector **260** at the bottom right. This reflected response is then effectively shunted to the left by the track changing MSC **258**, as the portion that would pass through in an upward direction on the right is cancelled but an out of phase contribution from the signal reflected off the ring-shaped MSC reflector **262** on the left. The 50% of the initial signal that is shunted to the left track **266** is launched downwards with a 90° phase shift relative to the wave in the right track **268**. This propagates down, is reflected off the lower ring reflector, and returns to the track changing MSC. The relative phases of the waves result in no upward propagating wave in the right track,

with all of the propagating energy going upward in the left track. It is reflected from the reflector at the top left **264** (again in this example an apodized reflector), and returns downward. This wave goes through another pass of being split, track changed, reflected by the ring MSC reflectors **260** and **262** at the bottom, and is finally recombined in the right track, heading upwards towards the I/O transducer where it creates a second response. This device embodiment provides the ability to significantly increase the differential delay in a sensor device for a given die size, as the second response occurs after the wave propagates from the I/O transducer to the lower ring MSC reflectors, back to the top of the die, back to the ring MSC reflectors, and back up to the I/O transducer. Thus the overall delay of the second reflection corresponds to almost three times the distance between the bottom and top reflectors - a significant increase relative to simple differential delay line structures shown in Figures 6 through 9. As sensor sensitivity for a differential delay line (excluding notch devices) depends, in part, on the differential delay - with longer delays producing sensors with greater sensitivity, the ability to 'fold' the acoustic response on the die surface (using this or other known MSC structures) can produce sensors with improved response sensitivity. Finally, the fact that this structure requires only one transducer as an input/output transducer means that there is no power division loss as would occur when two or more transducers are electrically connected in parallel. This reduces sensor loss further. With proper design, this embodiment (among others described in the present disclosure) can be designed to produce multiple transit responses from the near reflector **256** that occur at relatively short delays, providing three or more different delay responses that can be used to eliminate phase ambiguity and enhance precision of measurements extracted from the sensor or sensor-tag devices.

[0034] Figure 11 shows another schematic representation of a low-loss SAW differential delay line sensor that incorporates multiple transducers, making it useful either as a SAW sensor or a SAW sensor-tag wireless interface device that can be used to read external devices connected to one or more of said transducers, or as a combined device where selected measurements are made by the SAW device itself while other measurements are made by external devices and wirelessly read through the SAW device as an interface. Specifically, this device **270** includes three transducers **272**, a track changing MSC **274**, and a ring-shaped MSC reflector **276**. This device **270** can be used as a sensor-tag, with one or more of the transducers attached to external sensors and other components (such as impedance transforming components and FETs) to produce acoustic responses that depend on the external device measurements.

[0035] Figures 12A-12C show schematic representations of three additional device embodiments according to aspects of the present invention. Referring to Figure 12A, SAW differential delay line device **280** includes two

or more transducers **282** in one acoustic track, and two or more reflectors, shown as ring reflectors **284**. This device **280** can be used in a transmission mode, where the transducers **282** are connected electrically in parallel to a common antenna, and the reflected response is the combination of the S21 and S12 transmission responses. Alternatively, one transducer can be used as an I/O transducer, and the other transducer can be used as a reflector or interface to an external impedance varying or voltage producing device. The spacings **286** (between the two transducers), and **288** and **290** (between the transducers and the reflectors) can be varied to produce devices with a range of performance properties. The acoustic delay corresponding to spacing **286** determines the time at which the first transmission response occurs, and the times at which multiple transits of this response occur. Acoustic delays due to spacings **288** and **290** can be equal, slightly unequal, or very unequal. Equal spacings **288** and **290** would produce reflections that add in phase at the output. Due to multiple transit effects, this device **280** would still produce multiple responses, which can be useful. Slightly different spacings **288** and **290** will produce two responses slightly offset in time, which can result in a combined frequency domain response that has a power spectral density (PSD) with one or more notches.

[0036] Referring to Figure 12B, SAW device **292** consists of a single transducer **294** within the center region of a ring-shaped MSC **296**. Referring to Figure 12C, SAW device **300** includes two or more transducers **310** within a ring-shaped MSC **320**. Both devices **292** and **300** function as resonant devices, one-port and two-port respectively. Added spacing between the transducers **310** in device **300** can be used to add an initial acoustic delay to the device response. Such a resonant or ringing response with an added initial acoustic delay can also be implemented using two transducers between two highly efficient reflectors (such as ring-shaped MSCs) on either side of two transducers, similar to Figure 6 with two transducers rather than one. Additional embodiments can include more than two transducers.

[0037] This is just a small subset of possible device embodiments, as this approach can be extended to include multiple acoustic tracks, single sided die with UDTs or double sided die (on one or more tracks), and many other configurations that incorporate alternative MSC structures (fanned MSCs, J-shaped MSCs, interleaved U-shaped MSCs, and many others). Within the scope of the present disclosure, any of these embodiments can also include additional transducers in various locations on the surface, which can be used as interfaces to external impedance varying or voltage producing sensors, to produce wireless interface devices (or sensor-tags). Other embodiments within the scope of the present disclosure can include additional reflectors and MSC elements, multiple acoustic tracks, and transducers, or combinations thereof. The resulting devices can be used as SAW sensors, where all measurements are made direct-

ly by the SAW die. Alternatively, the resulting devices can serve as sensor-tags, as wireless interface devices to external measurement devices that have varying impedance or produce voltages in response to changes in measured parameters. Or, the resulting devices can be hybrid devices, where selected measurements are made directly by the SAW die and other measurements are made by external devices and read wirelessly through the sensor-tag device to which the external devices are connected.

[0038] Low-loss differential delay line SAW sensors with enhanced time diversity: Much recent work has focused on developing sets of passive wireless sensors that are non-interfering, so that calibrated measurements can be taken from sets of sensors that are operating simultaneously in the field of view of a transceiver. Time diversity, frequency diversity, code diversity, and/or chirp diversity have been used in combinations that make devices both individually identifiable and non-interacting. Depending on the bandwidth that is available in a given application environment, these diversity techniques can be combined in a manner appropriate to achieve sets of sensors that work together well. One way to enhance the time diversity capacity of a sensor set is to shrink the time length of each SAW sensor response pulse, since pulses that are confined within a narrow time range allow more of said pulses to fit within a given time range. However, for conventional finite impulse response (FIR) SAW filters, the time length of a transducer is inversely related to its bandwidth - meaning that very short transducers are broadband - which reduces the capacity for frequency diversity. Additionally, very broadband signals may not fit within allowed FCC frequency ranges for radio frequency (RF) electronic transmissions (such as in the ISM band). Also, there is another tradeoff when using very short transducers - each additional electrode overlap couples more energy into the SAW substrate. So using very short transducers can reduce the overall efficiency of electromechanical coupling, increasing device loss. Thus, physics limits the tradeoffs that can be made when trying to realize diversity schemes for conventional SAW structures.

[0039] The devices disclosed herein, by comparison, take advantage of the time compression and signal processing gain introduced by pulse compression to produce SAW responses that are very narrow in time and simultaneously have significantly increased signal levels - improving both time diversity and reducing loss. Figure 13 shows one SAW differential delay line device **320** according to aspects of the present disclosure. In this device **320**, two transducers **322** with opposite chirp slopes are positioned in two acoustic tracks. On each end are located reversing MSC elements **324** that both track change with 100% efficiency and also change the direction of the reflected wave. When the two transducers **322** are electrically connected in parallel, acoustic waves are simultaneously launched to the left and right in both the upper and lower acoustic tracks. The signal launched to the left

in the upper acoustic track, which is a downchirp (the high frequency comes first and the low frequency later) is coupled down to the bottom acoustic track, where it then is effectively reversed, propagating to the right. When received by the transducer in the lower track (an upchirp - which has the low frequency first and the high frequency later), there is very little output signal until the chirp signal is fully in the transducer, at which point a strong convolution response peak (compressed pulse) is generated. Coincidentally, the wave launched to the left in the lower track is an upchirp. This is reflected, reversed, into the upper track where it is compressed by the downchirp in the upper transducer. The two compressed pulses from the two propagation paths on the left occur simultaneously and add. A similar process involving the acoustic waves launched to the right in the upper and lower acoustic tracks produces a second compressed pulse from the acoustic propagation path and reflector on the right.

[0040] Thus, with the transducers fed in parallel by an antenna, as is conventional for SAW sensors, any activating signal will generate signals in the upper and lower tracks, which are counter-propagating, and recombine in the transducers to produce a pair of output compressed pulses that have significantly stronger signal strength than the input signal, and also are very short in time. As previously discussed, SAW devices with high BT products can transform fairly long duration signals into pulses that are much narrower in time. Pulse compression can produce pulses of duration $t \approx 1/B$ with voltage amplitude increased by $\sqrt{BT}$. By way of example, a BT of 100 can be implemented in a SAW transducer that is 2 microseconds long with a bandwidth of 50 MHz, among other combinations. This BT will generate a compressed pulse that is 20 nsec wide, with an amplitude that is 10 times larger than the original signal - introducing 20 dB of processing gain while reducing the time extent by a factor of 50.

[0041] Groups of sensors designed to operate as differential delay lines can be designed with response pulses interleaved in time, with individual sensor responses extracted through proper time domain windowing (in addition to windowing in frequency and convolving with coding if frequency and code diversity are also used). Inclusion of frequency diversity and/or code diversity can increase the total sensor set size possible for a given bandwidth and degree of time diversity.

[0042] The transducers **322** can be offset relative to one another (let to right) as shown, or vertically aligned. Also, the transducer pair can be positioned centrally, so that reflections from both sides arrive back at the transducers at the same time producing one large output pulse, or the pair of transducers **322** can be offset to one side or the other. If the transducers **322** are aligned vertically, and offset to one side of center, this produces a differential delay line that produces two strong output pulses at different times. A similar differential delay line response occurs when the transducers are not aligned

vertically (i.e., they are offset left to right relative to one another) independent of their placement between the two reversing MSC elements, and/or when they aligned vertically and are off-center relative to the two reversing MSC elements.

[0043] One example of a track changing, 100% reflective MSC is that shown by Danicki in "Theory of Surface Acoustic Wave Reversing Multistrip Coupler," Archives of Acoustics, January 1994, pp. 227-238. Figure 14 shows a schematic representation of a low-loss differential delay line SAW sensor **330** according to aspects of the present disclosure that incorporates this structure. The sensor **330** also includes chirp transducers **334** with chirp senses as shown, or equivalently the two chirps shown could both be mirrored left to right, or they could be swapped between upper and lower acoustic tracks, all with nominally identical results. For any of these configurations, the overall operation of this embodiment is as described for the device **320** in Figure 13. In the reflective track changing reversing MSC elements **332**, the MSC strips are spaced so they are 120° apart, so that swapping two of every three traces as shown reverses the direction of acoustic wave propagation in the second track relative to the wave propagation in the first track. (It should be noted that close attention should be paid to MSC line spacing to ensure that the lines are not synchronous, which would produce reflections of the acoustic wave).

[0044] Another way to implement reversing track changing MSC elements according to the present invention would be to combine a track changing MSC with ring-shaped MSC reflector elements in an appropriate configuration. Figure 15 shows one such device **340** embodiment that includes two transducers **342** with opposite chirps, two track changing MSCs **344** that would normally be 50% track changing MSCs, and four ring-shaped MSC reflectors **346**. As above, the center transducers can be fed in parallel and can be separate or electrically connected on the die (as shown). Additional components could be added to enable this structure to be used as a sensor-tag interface device.

[0045] A more compact, single acoustic track low loss differential delay line sensor **350** using pulse compression according to the present invention is shown Figure 16. This embodiment uses a symmetrically chirped center transducer **352**, surrounded by two ring-shaped MSC reflectors **354**. The dispersive signal sent to the left (an upchirp followed by a downchirp is reflected, and generates a strong compressed pulse that is short in time duration when it is again time aligned with the input transducer. The same process happens to the right. Once again as a single transducer input device, there is no power division loss. Processing gain enhances output sensor signal levels considerably (easily by 20 dB or more).

[0046] In the example device **350** shown in Figure 16, a smooth upchirp is followed by a time-reversed downchirp. But any time-symmetric dispersive transduc-

er construction could be used to similar effect, including step chirped, frequency coded chirped (wherein sections of the frequency chirp are 'cut' and 'shuffled' in time), nonlinear chirps, chirps of varying chirp slope, and others. Codes can also be introduced as mentioned previously, though for use in this structure any codes used in the transducer **352** must also be time symmetric.

[0047] Other devices according to aspects of this invention include embodiments that contain multiple acoustic tracks with duplicate copies of the structures above, with the same or different delays, and/or with other added SAW elements such as transducers, transducers attached to external sensor elements, reflectors (conventional or ring MSC reflectors), MSCs, and films or surface treatments to produce waveguiding, to short out the electric field at the surface, or to introduce sensitivity to a target measurand (as in magnetostrictive films, biological moieties, and chemically sensitive and selective films). The device embodiments described can be implemented using any of a number of surface-launched acoustic waves, including Rayleigh waves, flexural plate waves (FPWs), Love waves, surface transverse waves (STW), shear horizontal acoustic plate modes (SH-APM), layer guided acoustic plate modes (LG-APM), layer guided shear horizontal acoustic plate modes (LG-SHAPM), leaky surface waves, and pseudo-SAW modes. The transducers and/or reflectors described can be tapered, slanted, stepped tapered, apodized, withdrawal weighted, EWC, UDT, SPUDT, dispersive, and/or waveguide structures. All of these techniques can also be used incorporating dispersive and harmonic techniques.

[0048] Inductive coupling and resonant magnetic coupling for remote reading of SAW sensors: To date, most wireless SAW sensors described in the literature have been activated via conventional antennas. Dipole, monopole, patch, microstrip, slot, and numerous other antenna configurations have been used to activate SAW sensors via conventional 'radiative' antennas that interact with propagating, time varying electromagnetic (EM) signals. Some SAW devices for use in liquids have been demonstrated that use inductive coupling to activate the SAW device wirelessly at short range (up to a cm or two). A range of applications exist for which it would be advantageous to produce wireless SAW sensors that can operate in media that are slightly to moderately conductive (such as sea water or heavy brine), and also in highly metallic environments. Conventional radiative antennas do not function properly when mounted on metal surfaces. EM signals experience excessively high loss in conductive or partially conductive media, as the conductivity tends to short out the electric field portion of the wave. Thus, alternative methods of activating and reading the sensors were needed. Since magnetic fields are not 'shorted out' by the conductivity of the media in which it exists, magnetic methods for transfer of power are more useful in high conductivity environments.

[0049] Resonant magnetic coupling has been demonstrated for power transfer by companies such as Witricity,

enabling highly efficient wireless power transfer over several meters (in air). Magnetic communication of power and data through metal has also been demonstrated using magnetic signals. For example, Hydro-Tech (Corey Jaskolski, President) has used magnetic signals to transfer power and sensor data through metal cylinders. Resonant magnetic coupling once again provides a more efficient power transfer.

[0050] Certain aspects of the present invention disclose magnetic 'antennas' such as coils (planar and helical), magneto-electric monopoles and dipoles, with appropriate matching components, to activate and read SAW devices (sensors and sensor-tags, among others) in conductive environments. Various electrically insulating materials can be used to isolate the antenna from the surrounding environment. Helical coils can be circular, oval, rectangular, square, or other shape in cross section, and planar loops and coils can also be of many shapes, such as shapes similar to helical inductors among others. Other aspects of the present invention combine magnetic power transfer with electrical load modulation of the magnetic power signal for transfer of data. Magnetic 'antennas' can be mounted on or very close to metal surfaces, and can be used to activate SAW sensors and to receive sensor data. Such a method can operate in conductive media and on, around, and potentially through certain metal surfaces. Operation of SAW sensors in conductive fluids has been successfully demonstrated using aspects of the present invention.

[0051] Wireless measurement of current and voltage: SAW devices were shown in the early 1970's to be capable of measuring voltages directly, through the change in acoustic wave velocity produced by voltages applied transverse to the SAW die. However, the voltages required to produce significant changes in frequency or delay were large (hundreds of volts to kV) for realistic die thicknesses. More recent work has shown that SAW devices can be used with zero-bias (normally ON) field effect transistors (FETs) to produce wireless devices capable of reading voltages generated by external sensors (such as AE sensors, thermocouples, etc.). The external sensor voltage is applied as the gate to source (G-S) voltage on the FET, and modifies the drain to source (D-S) resistance of the FET. This D-S impedance is electrically connected as a load impedance across a SAW transducer, and changes in D-S resistance alter the SAW response reflected from the loaded transducer.

[0052] The hybrid FET/SAW sensor-tag wireless interface devices developed previously, and others using advantageous SAW embodiments according to aspects of the present invention described herein, can be used to measure electrical fields and magnetic fields, and by monitoring the magnitude and sign of the electrical field and the magnitude and direction of the magnetic field, can provide information on the voltage and current in high voltage lines (and other current carrying conductors), and on the relative phase (leading or lagging) of the current and voltage - providing information necessary to deter-

mine power factor. Such information can be useful, for example, in monitoring the condition of the power lines and other electrical equipment.

[0053] Another type of system according to specific aspects of the present invention is a passive wireless power line voltage, current, and temperature monitoring sensor system. This system utilizes SAW sensors or sensor tags with field probes to measure the electric field and magnetic field around current carrying conductors, which provide proxies for the voltage and current in the conductor. The distribution portion of the power grid runs essentially blind today, i.e., almost no real-time data is available to the grid operator on the condition of the distribution lines and transformers. Pinging smart meters can provide data on power outages at the individual meter level, but automated diagnostic tools that inform operators about the details, locations, and causes of outages are not available. Equally concerning, there are no prognostic tools for the grid that can predict component failures prior to problems occurring. Event driven condition based monitoring (CBM) of the distribution grid would enable operators to identify incipient failures, such as transformers nearing failure, and prioritize preventive maintenance to prevent outages. Since the cost of performing preventative maintenance is much lower than that of responding to an outage, such systems can reduce operating costs while enhancing grid stability. However, there are no current methods for distributed monitoring of the grid that are low enough cost to enable widespread monitoring, particularly at the local distribution level. Low-cost monitoring systems that can be distributed along power lines down to an individual span level of granularity could achieve unprecedented sensitivity in monitoring grid conditions.

[0054] Figures 17A and 17B show various schematic representations of a voltage and current monitoring system **400** according to aspects of the present disclosure. Figure 17A shows a cut-away view of the interior of the system's casing **408**, which serves as a mechanical housing for the current sensors **406** and the voltage sensors **404**, as well as providing a mounting means to attach the system to a current carrying conductor **402**, including hot stick mounting for power lines. Figure 17B shows the system with the mechanical housing **400** closed around the conductor **402**. Figure 18 shows the concept for system operation on a three phase power line according to aspects of the present disclosure. Each or the three phase conductors has a wireless, batteryless sensor module that corresponds to the system **400** shown in Figures 17A and 17B mounted on the line. A wireless interrogator, also referred to as a reader or a radio, is mounted on the pole below the power lines. The reader sends RF signals that activate the sensor systems on the lines, then receives and digitizes the reflected sensor system RF responses. After local signal processing, sensor data can be transferred to the grid operator via the smart grid network, or via cellphone or wireless mesh networks, or any desired wireless communication system or protocol. A single reader can collect and interpret data

from multiple sensors (up to thirty-two or more in the field of view of one interrogator). Moving all of the digital signal processing (DSP) and wireless communications hardware to a reader that can be mounted in an accessible location away from the power line or transformer being monitored reduces cost and enhances system reliability compared to systems with radios mounted on the high voltage lines. The SAW devices used operate in harsh environments, and have demonstrated lifetimes in excess of several decades in challenging environments.

[0055] How the SAW sensor-tag assembly modules measure voltage and current: Placing a loop of wire in (and perpendicular to) the magnetic field generated by a time varying current on an AC power line will cause a current to be induced in the wire loop. For an ideal open circuited loop, this current induces a voltage across the open ends of the loop. By connecting the ends of the loop to a full bridge rectifier and then to the gate of a FET, a time varying drain to source FET impedance can be generated as the current in the power line changes.

[0056] Figure 19 shows a schematic representation of a wireless, batteryless SAW current sensor-tag assembly according to aspects of the present disclosure. This assembly includes a magnetic field probe sensor connected to a FET interface module, a SAW sensor-tag, and an antenna. The SAW sensor-tags provide a wireless interface with the FET(s), reading the D-S impedance that is being modified by the field probe voltage applied to the FET gate, thus monitoring the magnetic field and ultimately the line current. In an alternate embodiment of the present invention, a Rogowski coil placed around the wire, with the gate and source of the FET attached across the coil ends, can be used instead of a simple loop shown in Figure A, making the voltage less dependent on positioning of the coil relative to the power line. Using a FET interface according to the present invention, the SAW sensor will be able to detect current magnitude and direction by detecting the strength and orientation of the magnetic field produced. Data gathered by the interrogator can include current magnitude and direction as a function of time. This data can be collected for each phase of the power system, allowing extraction of the relative current amplitude and phase information.

[0057] Figure 20 shows a schematic representation of a wireless, battery less SAW voltage sensor-tag assembly according to aspects of the present disclosure. Once again, the assembly consists of a field probe that can produce a voltage based on the electric field, a FET interface, a SAW sensor-tag, and an antenna, although in this case the field probe is designed to detect the electric field. Around an AC power line, a time-varying electric field will form with a field intensity that is directly related to the voltage on the line. Field intensity falls off approximately as the inverse of the radial distance from the line. By placing two radially separate probes in the field, a voltage difference between the probes can be measured and used to drive a FET attached to one of the SAW sensor tags disclosed herein. As with the current moni-

toring case, the time varying impedance of the FET will load the SAW tag and allow wireless reading of the impedance of the FET. As a result, we can monitor the field intensity and by extension, the line voltage. Since the electric field falls off to ground over a distance corresponding to the distance from the line to ground, which can vary from location to location and with different line types, the electric field intensity at any given distance from the line will also vary with these factors. Thus, measuring the electric field intensity will only provide a scaled measure of the voltage on the line, unless a calibration can be done to establish the absolute voltage on the line relative to ground.

[0058] A complete line monitoring sensor system (400 in Figures 17A and 17B) for use on AC power systems requires that both current and voltage are measured during both positive and negative portions of the nominally 60Hz cycle, in order to allow determination of the direction of current flow. Finding the relative phase between the current and voltage also requires accurate zero crossing detection for both signals. Figure 21 shows a SAW wireless interface device configuration with multiple FETs for use in monitoring current (magnitude and direction) and voltage (magnitude and polarity) according to aspects of the present disclosure. The field probes that produce voltages V1 and V2 are loops (or a Rogowski coil) for detection of time varying magnetic fields and simple electrical probes (similar to simple monopole antennas) for electrical field measurement.

[0059] For field effect transistors (FETs), the Gate to Source (G-S) voltage controls Drain to Source (D-S) impedance of FET. Some FETs exhibit D-S impedance characteristics that are desirable for use with SAW devices with positive G-S voltages, while others exhibit D-S impedance characteristics that are desirable for use with SAW devices with negative G-S voltages, and yet others function with G-S voltages that span zero voltage.

[0060] For the SAW/FET configuration shown in Figure 21, two voltages are pulled from the field probes (which measure the electric or magnetic field), producing a time-varying differential voltage of magnitude $|V_1(t) - V_2(t)|$, and diodes are used to control application of the probe voltages to one of two FETs depending on the sign of the differential input. On the positive half cycle of the line current or voltage (the waveform shown), V1 is more positive than V2, activating the top diode and applying V1 to the gate of the bottom FET, with V2 applied to the FET source. With proper FET selection, this applied voltage causes an impedance change in the drain to source of the lower FET, which modifies the reflectivity of the attached SAW transducer. Changes in the acoustic wave signal reflected from the transducer can be interpreted as a change in FET resistance, or gate voltage, or ultimately electric or magnetic field strength. On the negative half cycle, V1 is more negative than V2, causing the top diode to shut off and the bottom diode to activate. Now, V2 is routed to the gate of the top FET, and V1 is applied to the source. This modifies the drain to source imped-

ance of the FET attached to the top SAW transducer. In this way, the positive and negative halves of an input differential signal from the field probes are separately identifiable and measurable.

[0061] The discussion above assumes ideal diodes that have essentially zero threshold voltage. The use of realistic diodes for input signal routing, however, impacts the performance of this approach, in that most real diodes have non-zero threshold voltages (V_{TH}) that can be as much as 0.7V (typically). This is the voltage at which the diode turns on. Thus, the voltages routed to the FET gates are lowered by the threshold voltage of the diodes. The zero voltage crossing point of the input signal also can become difficult to track due to the diode threshold voltage. This turn-on voltage could cause the circuit shown in Figure 21 to exhibit a 'dead zone' where the system is non-responsive for differential probe outputs from $-V_{TH}$ to $+V_{TH}$ (typically from about -0.7V to + 0.7V), though careful selection of low threshold voltage diodes may reduce the dead-zone.

[0062] Since the SAW sensor-tag assemblies will be operating in a high voltage power line environment, where transients are not uncommon, it is important to include protective circuitry. Figure 22 shows the circuit of Figure 21, with added TVS devices across the two leads of the field probe. This ensures that, even if there is a surge in current or voltage on the line, the differential output of the field probe will not exceed a predetermined level.

[0063] A complete monitoring system 400 in Figure 17 will include two SAW sensor-tag assemblies (shown in Figure 22), one to monitor the line voltage and one to monitor line current. In addition, one embodiment of the present invention includes a SAW temperature sensor to determine the power line temperature. All of these sensors and sensor-tags can be implemented on a single substrate, or alternatively it is possible to utilize multiple substrates used together to implement the sensor-tag assemblies in one embodiment of the present invention. Two or more die can be used, potentially a reference die and one or more sensing die. The die can be mounted together in a common sample plenum, or the reference device can be hermetically sealed in one package while the sensing die is exposed to the media of interest in another package. The reference die can be combined with one or more sensing die for temperature or other parameters, and hermetically sealed in a package. This package can be electrically connected to an external sensing die, which loads the acoustic response on one of the sensing die or tracks.

[0064] The illustrations included herein are exemplary in nature, and do not encompass all aspects of the present invention. One skilled in the art would recognize that the improvements provided by embodiments of this invention can be implemented to work with any of a wide range of known SAW sensor and sensor-tag structures, including but not limited to those incorporating various diversity techniques (code, chirp, time, and frequency

diversity among others). A wide range of known coding techniques can be implemented in combination with the embodiments described. It would be understood by one versed in the art that simple on-off keying, phase modulation, pulse position modulation, and many other techniques could be used with the techniques described herein to enhance the number of codes that work together without interference. Frequency diversity, code diversity, time diversity, and other known techniques can be combined to achieve sets of devices with desirable properties. Any of these techniques could be utilized in the aforementioned device embodiments to increase the number of sensors that can work together in a system. Devices utilizing such structures could also be useful for RFID tag and sensor-tag applications, where identification of individual devices is desired. In addition, combinations of these techniques may be advantageous in certain circumstances.

[0065] The invention is defined by the appended claims.

Claims

1. An apparatus for wirelessly measuring the strength of electric and/or magnetic fields, comprising:
 - one or more acoustic wave sensor or sensor-tag devices;
 - at least one transistor;
 - at least one field probe operable to interact with the field being measured and produce a voltage; and
 - one or more antennas,**characterized in that** said at least one transistor is electrically connected to said acoustic wave sensor or sensor-tag device and to said field probe; and
in that said transistor is configured to produce an impedance that is responsive to the voltage produced by the at least one field probe.
2. An apparatus for wirelessly measuring the strength of electric and/or magnetic fields according to claim 1, wherein said transistor is a field effect transistor, FET.
3. An apparatus for wirelessly measuring the strength of electric and/or magnetic fields according to claim 2,
 - wherein the drain and source of said FET are electrically connected to at least one transducer on said one or more acoustic wave devices; and
 - wherein the voltage produced by said at least one field probe is applied to the FET gate.
4. An apparatus according to claim 1 for wirelessly

measuring the strength of the electric field around a conductor carrying an AC voltage, wherein said at least one field probe comprises two conductive objects located at different radial distances from the conductor.

5. An apparatus according to claim 1 for wirelessly measuring the strength of the magnetic field around a conductor carrying an AC current, wherein said at least one field probe comprises one or more conductive loops located with the plane of the loops containing the conductor.

6. An apparatus according to claim 5 for wirelessly measuring the strength of the magnetic field around a conductor carrying an AC current, wherein said one or more conductive loops further comprise a Rogowski coil.

7. An apparatus according to claim 1 for wirelessly measuring the strength of the magnetic field around a conductor carrying an AC current, wherein said at least one field probe comprises a current transducer, CT.

8. A system for wirelessly measuring the strength of electric and/or magnetic fields, comprising:

one or more apparatuses for wirelessly measuring the strength of electric and/or magnetic fields according to claim 1; and at least one wireless reader operable to activate and gather data from said one or more apparatuses.

9. A system for wirelessly measuring the current and voltage on a conductor carrying an AC voltage, comprising:

at least one apparatus for wirelessly measuring the strength of electric fields according to claim 1; and at least one apparatus for wirelessly measuring the strength of magnetic fields according to claim 1, wherein said apparatuses may utilize one shared antenna for wireless communication; wherein said apparatuses may utilize one shared acoustic wave device; and wherein said apparatuses may be interrogated by one or more wireless readers.

Patentansprüche

1. Gerät zur drahtlosen Messung der Stärke elektrischer und/oder magnetischer Felder, aufweisend:

eine oder mehrere Schallwellensensor- oder Sensor-Tag-Vorrichtungen; mindestens einen Transistor; mindestens eine Feldsonde, die dazu betreibbar ist, mit dem gemessenen Feld zu interagieren und eine Spannung zu erzeugen; und eine oder mehrere Antennen, **dadurch gekennzeichnet, dass** der mindestens eine Transistor elektrisch mit der Schallwellensensor- oder Sensor-Tag-Vorrichtung und der Feldsonde verbunden ist; und dass der Transistor so gestaltet ist, dass er eine Impedanz erzeugt, die auf die von der mindestens einen Feldsonde erzeugte Spannung reagiert.

2. Gerät zur drahtlosen Messung der Stärke elektrischer und/oder magnetischer Felder nach Anspruch 1, wobei der Transistor ein Feldeffekttransistor (FET) ist.

3. Gerät zur drahtlosen Messung der Stärke elektrischer und/oder magnetischer Felder nach Anspruch 2,

wobei der Drain und die Source des FET elektrisch mit mindestens einem Wandler auf dem einen oder den mehreren Schallwellenvorrichtungen verbunden sind; und wobei die von der mindestens einen Feldsonde erzeugte Spannung an das FET-Gate angelegt wird.

4. Gerät nach Anspruch 1 zur drahtlosen Messung der Stärke des elektrischen Feldes um einen Leiter, der eine Wechselspannung führt, wobei die mindestens eine Feldsonde zwei leitende Objekte aufweist, die sich in unterschiedlichen radialen Abständen von dem Leiter befinden.

5. Gerät nach Anspruch 1 zur drahtlosen Messung der Stärke des Magnetfelds um einen Leiter, der einen Wechselstrom führt, wobei die mindestens eine Feldsonde eine oder mehrere Leiterschleifen aufweist, die so angeordnet sind, dass die Ebene der Schleifen den Leiter enthält.

6. Gerät nach Anspruch 5 zur drahtlosen Messung der Stärke des Magnetfelds um einen Leiter, der einen Wechselstrom führt, wobei die eine oder die mehreren Leiterschleifen ferner eine Rogowski-Spule umfassen.

7. Gerät nach Anspruch 1 zur drahtlosen Messung der Stärke des Magnetfelds um einen Leiter, der einen Wechselstrom führt, wobei die mindestens eine Feldsonde einen Strom-

wandler, CT, aufweist.

8. System zur drahtlosen Messung der Stärke elektrischer und/oder magnetischer Felder, aufweisend:

eines oder mehrere Geräte zur drahtlosen Messung der Stärke elektrischer und/oder magnetischer Felder nach Anspruch 1; und mindestens ein drahtloses Lesegerät, das dazu dient, Daten von dem einen oder den mehreren Geräten zu aktivieren und zu sammeln.

9. System zur drahtlosen Messung von Strom und Spannung an einem Leiter, der Wechselspannung führt, aufweisend:

mindestens ein Gerät zur drahtlosen Messung der Stärke elektrischer Felder nach Anspruch 1; und mindestens ein Gerät zur drahtlosen Messung der Stärke magnetischer Felder nach Anspruch 1, wobei die Geräte eine gemeinsame Antenne für die drahtlose Kommunikation nutzen können; wobei die Geräte eine gemeinsame Schallwellenvorrichtung nutzen können; und wobei die Geräte von einem oder mehreren drahtlosen Lesegeräten abgefragt werden können.

Revendications

1. Appareil pour mesurer sans fil l'intensité de champs électriques et/ou magnétiques, comprenant :

un ou plusieurs dispositifs de capteur ou de capteur-étiquette à ondes acoustiques ; au moins un transistor ; au moins une sonde de champ pouvant être rendue opérationnelle pour interagir avec le champ qui est mesuré et pour produire une tension ; et une ou plusieurs antennes, **caractérisé en ce que** : ledit au moins un transistor est connecté électriquement audit dispositif de capteur ou de capteur-étiquette à ondes acoustiques et à ladite sonde de champ ; et **en ce que** : ledit transistor est configuré pour produire une impédance qui est sensible à la tension produite par l'au moins une sonde de champ.

2. Appareil pour mesurer sans fil l'intensité de champs électriques et/ou magnétiques selon la revendication 1, dans lequel ledit transistor est un transistor à effet de champ, FET.

3. Appareil pour mesurer sans fil l'intensité de champs

électriques et/ou magnétiques selon la revendication 2,

dans lequel le drain et la source dudit FET sont connectés électriquement à au moins un transducteur sur lesdits un ou plusieurs dispositifs à ondes acoustiques ; et dans lequel la tension produite par ladite au moins une sonde de champ est appliquée sur la grille du FET.

4. Appareil selon la revendication 1 pour mesurer sans fil l'intensité du champ électrique autour d'un conducteur supportant une tension AC, dans lequel ladite au moins une sonde de champ comprend deux objets conducteurs localisés à des distances radiales différentes du conducteur.

5. Appareil selon la revendication 1 pour mesurer sans fil l'intensité du champ magnétique autour d'un conducteur supportant un courant AC, dans lequel ladite au moins une sonde de champ comprend une ou plusieurs boucles conductrices localisées de telle sorte que le plan des boucles contienne le conducteur.

6. Appareil selon la revendication 5 pour mesurer sans fil l'intensité du champ magnétique autour d'un conducteur supportant un courant AC, dans lequel lesdites une ou plusieurs boucles conductrices comprennent en outre une bobine de Rogowski.

7. Appareil selon la revendication 1 pour mesurer sans fil l'intensité du champ magnétique autour d'un conducteur supportant un courant AC, dans lequel ladite au moins une sonde de champ comprend un transducteur de courant, CT.

8. Système pour mesurer sans fil l'intensité de champs électriques et/ou magnétiques, comprenant :

un ou plusieurs appareils pour mesurer sans fil l'intensité de champs électriques et/ou magnétiques selon la revendication 1 ; et au moins un lecteur sans fil pouvant être rendu opérationnel pour activer lesdits un ou plusieurs appareils et pour collecter des données en provenance de ceux-ci.

9. Système pour mesurer sans fil le courant et la tension sur un conducteur supportant une tension AC, comprenant :

au moins un appareil pour mesurer sans fil l'intensité de champs électriques selon la revendication 1 ; et au moins un appareil pour mesurer sans fil l'in-

tensité de champs magnétiques selon la revendication 1,
dans lequel lesdits appareils peuvent utiliser
une antenne partagée pour une communication
sans fil ;
dans lequel lesdits appareils peuvent utiliser un
dispositif à ondes acoustiques partagé ; et
dans lequel lesdits appareils peuvent être inter-
rogés par un ou plusieurs lecteurs sans fil.

5

10

15

20

25

30

35

40

45

50

55

Figure 1

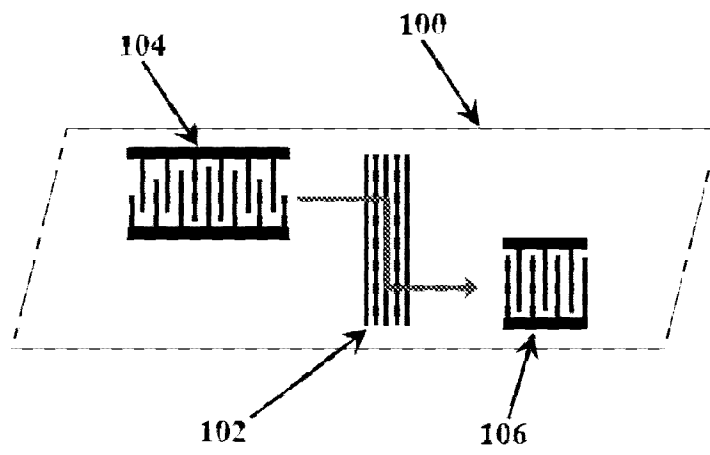


Figure 2



Figure 3

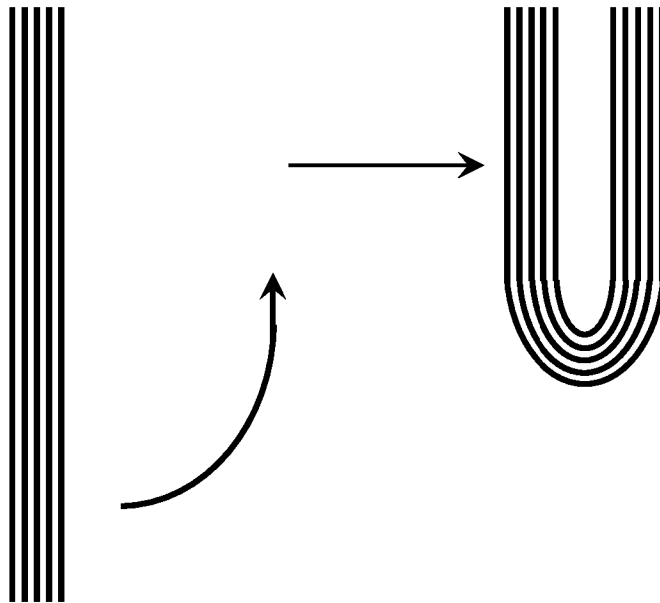


Figure 4

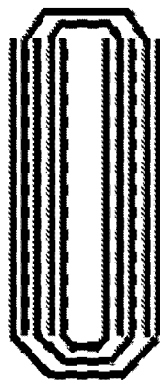


Figure 5


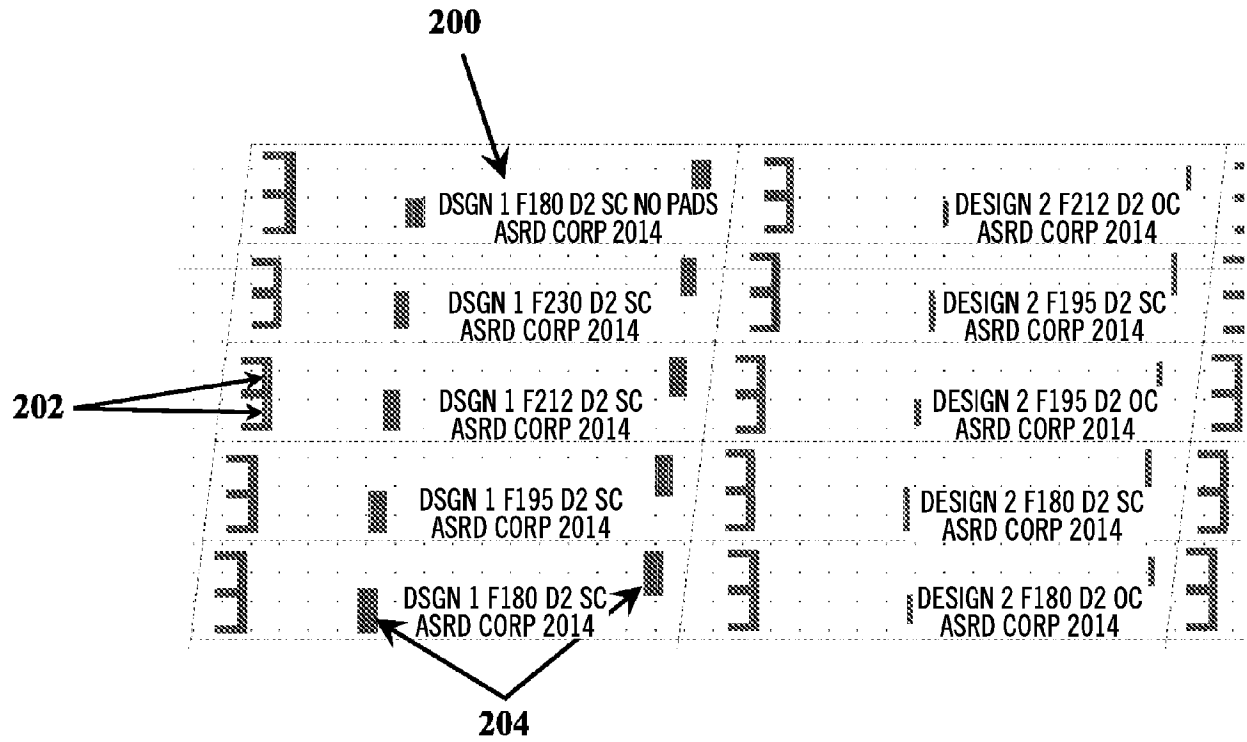


Figure 6

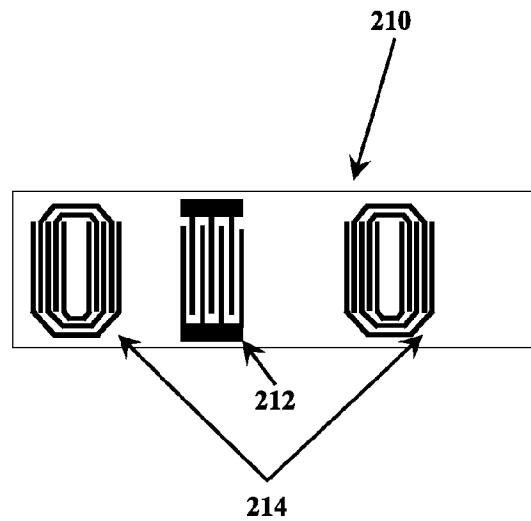

SUBSTITUTE SHEET (RULE 26)

Figure 7

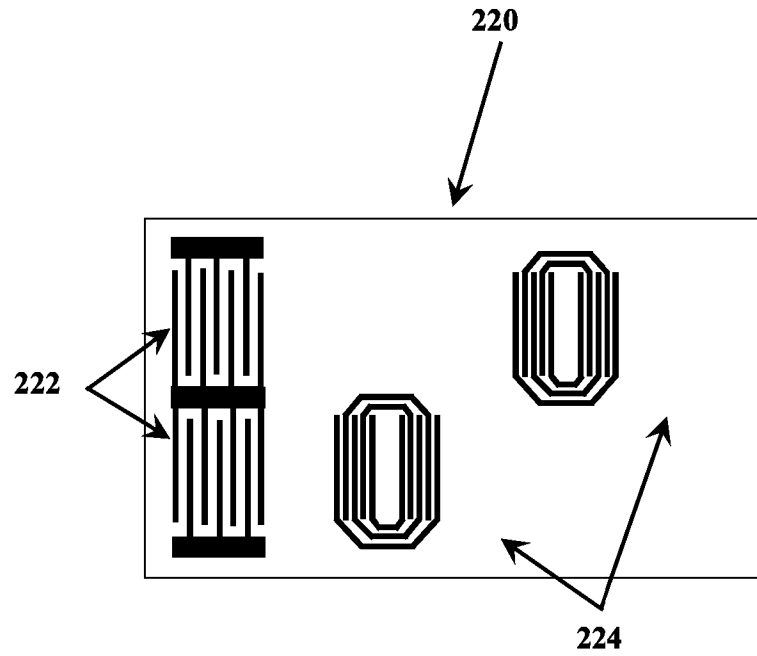


Figure 8

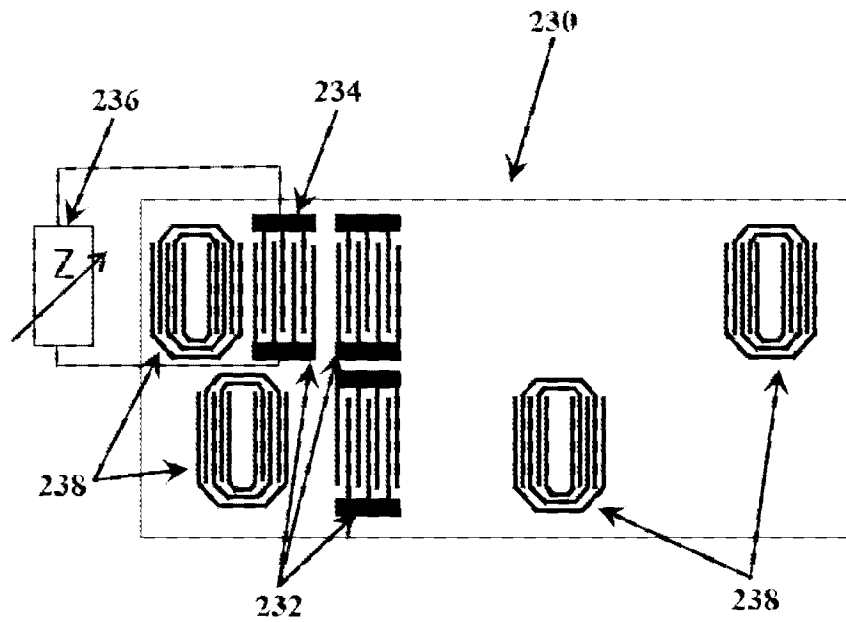


Figure 9

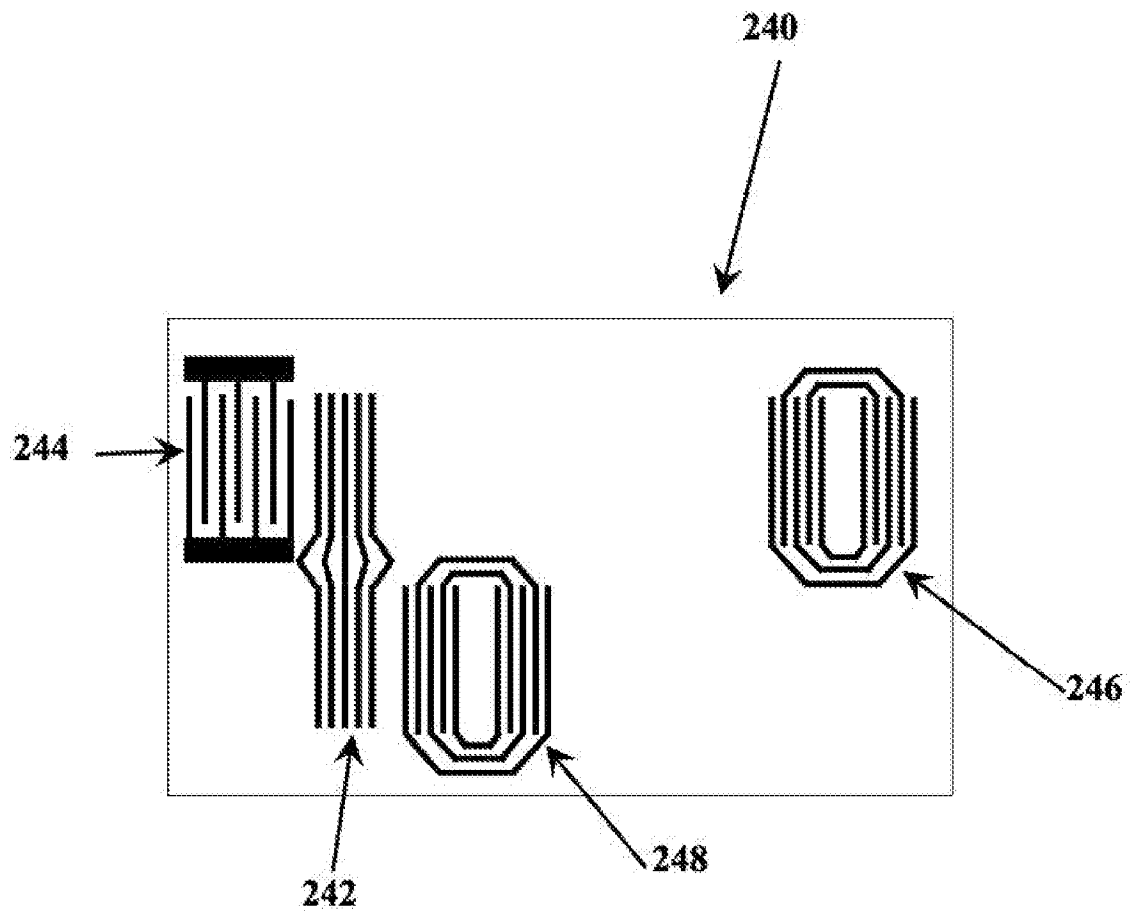


Figure 10

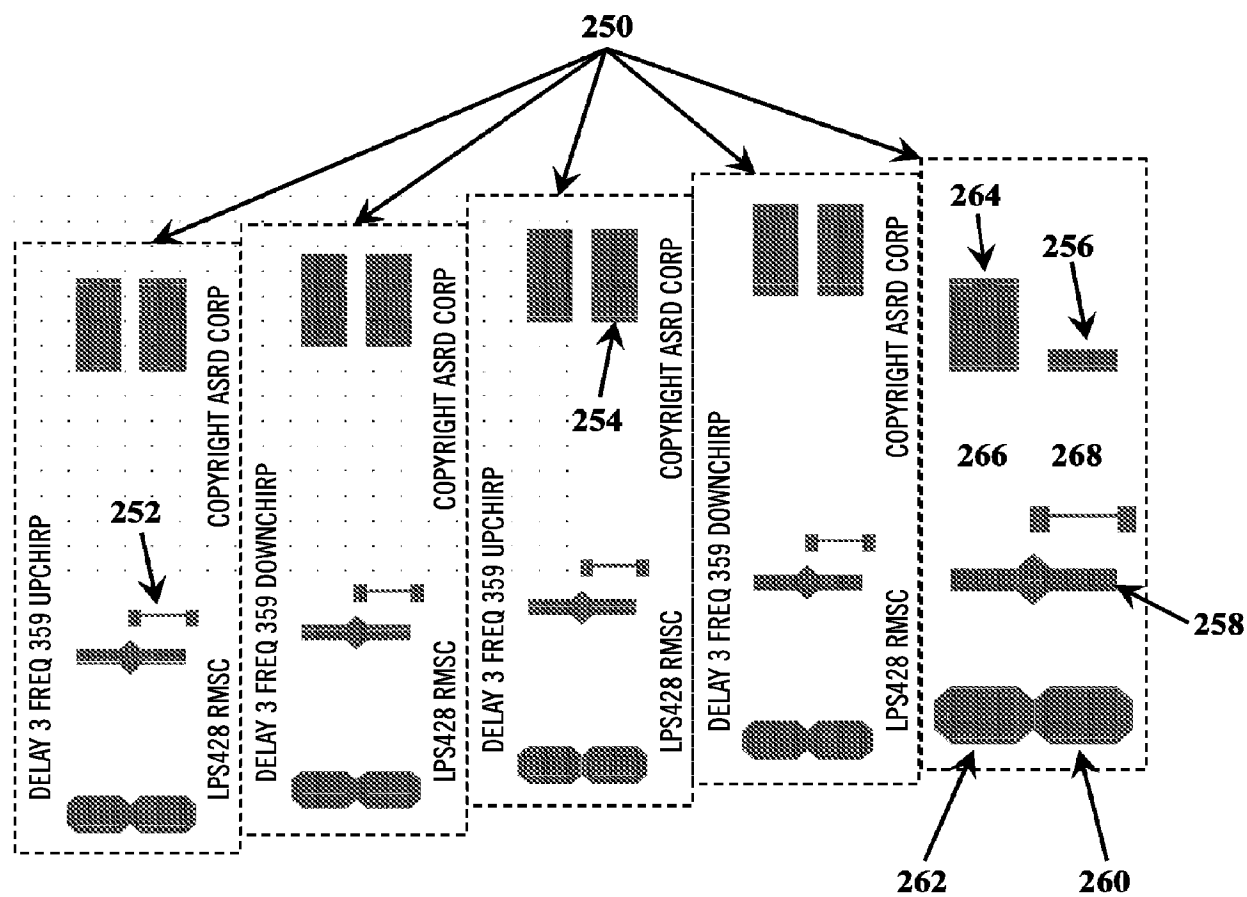


Figure 11

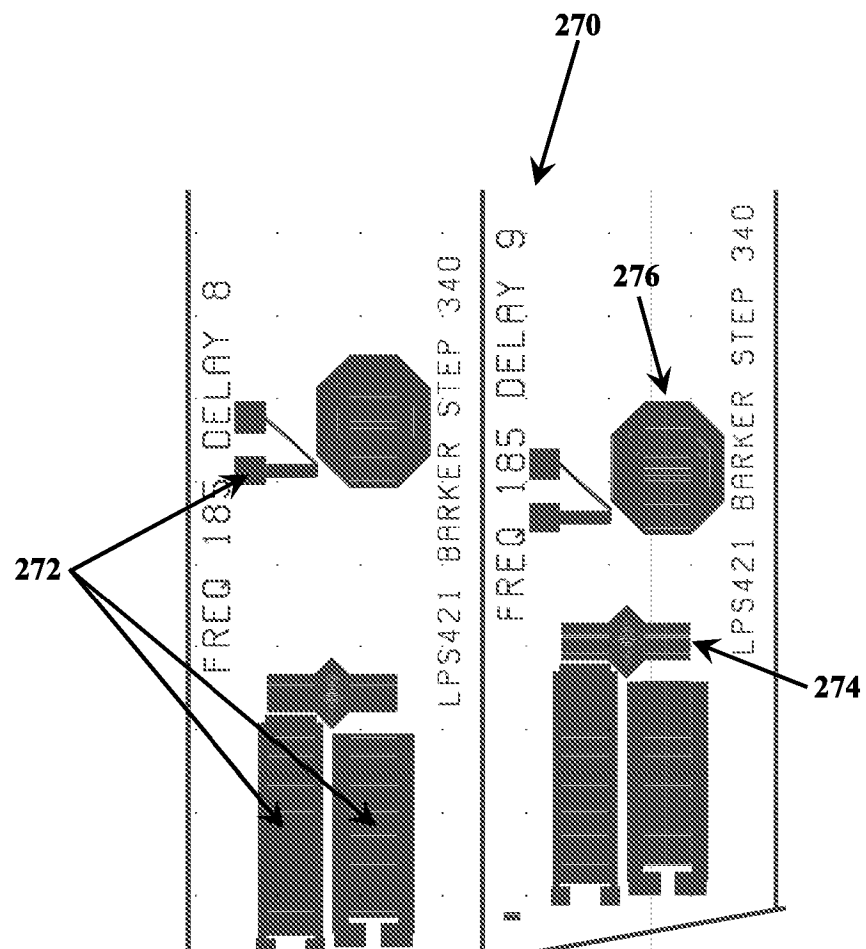


Figure 12A

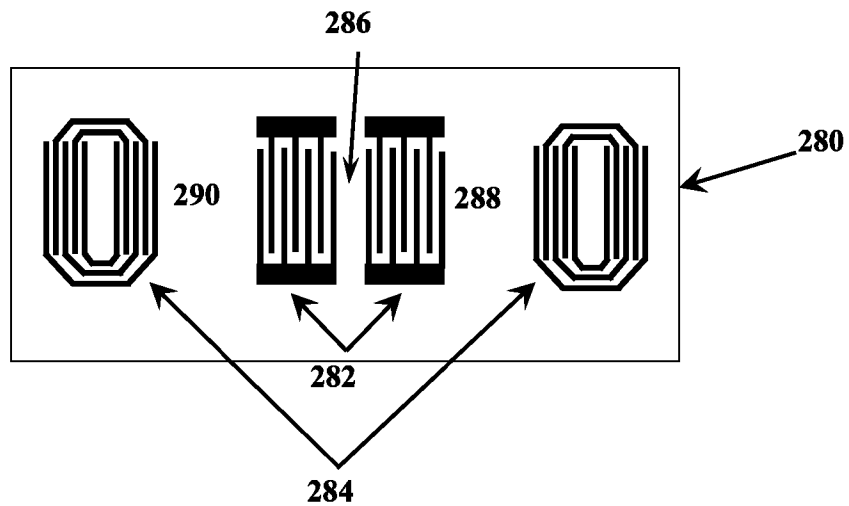


Figure 12B

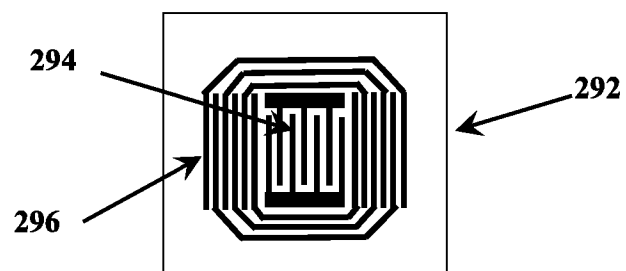


Figure 12C

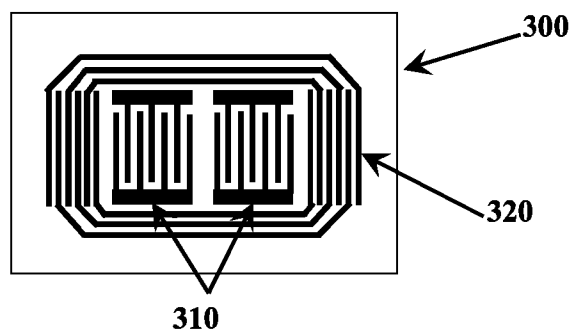


Figure 13

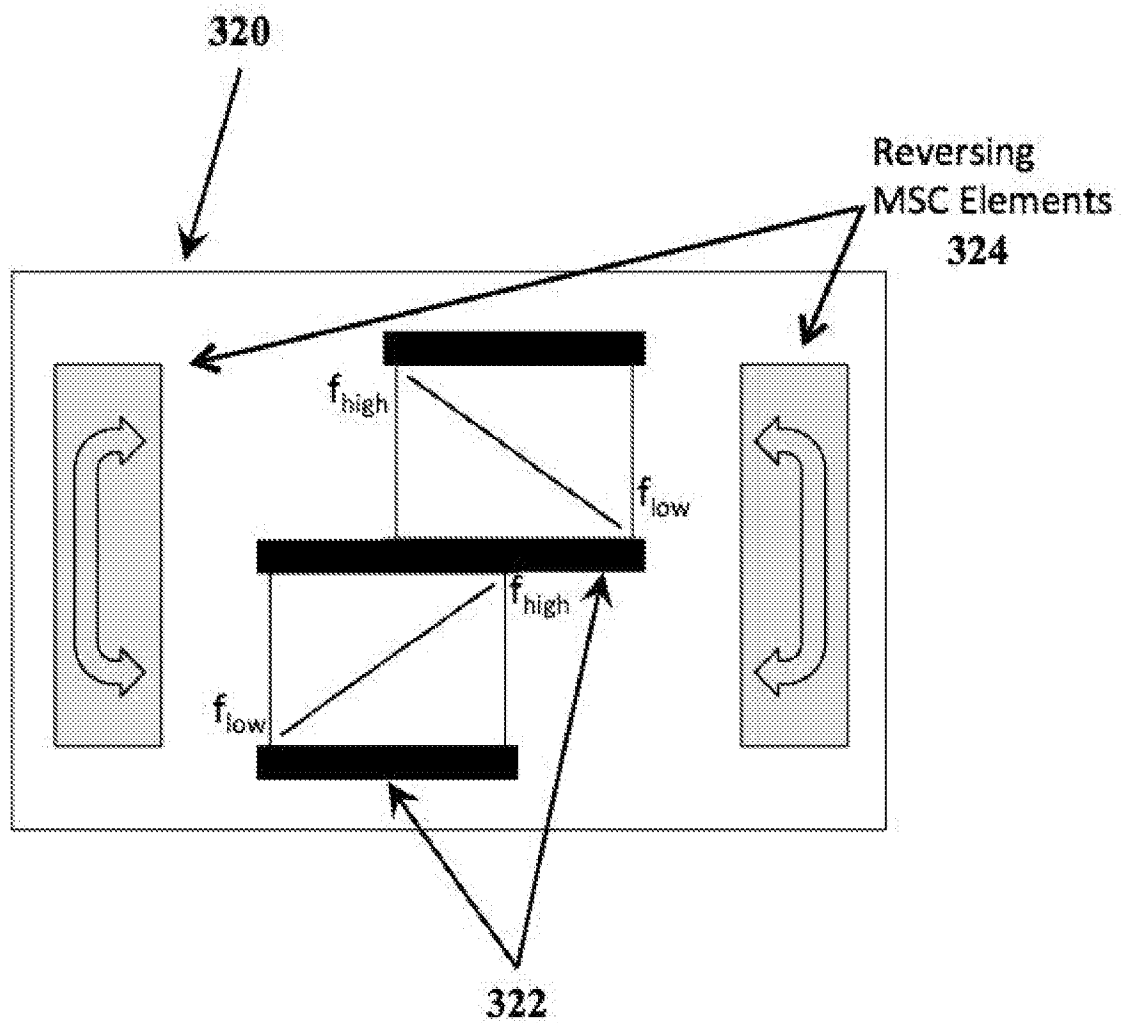


Figure 14

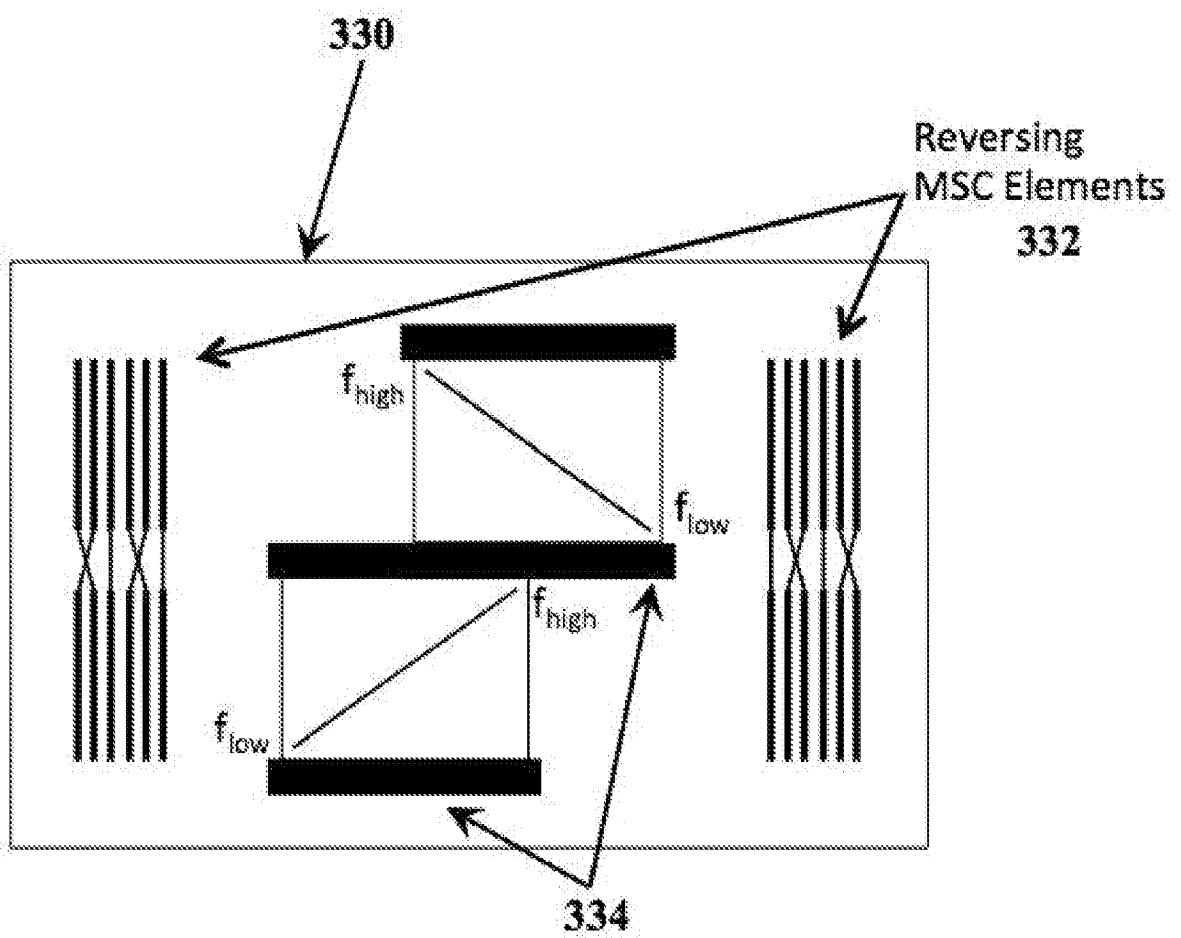


Figure 15

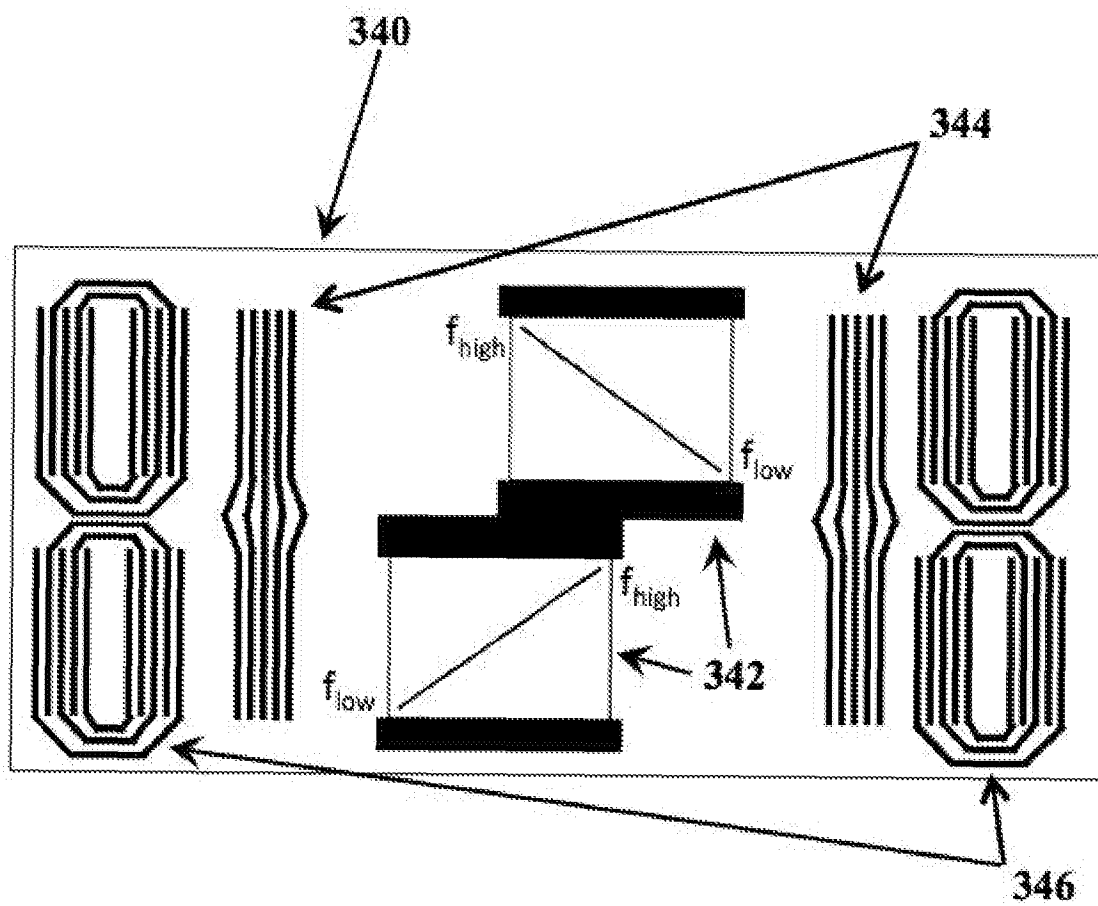


Figure 16

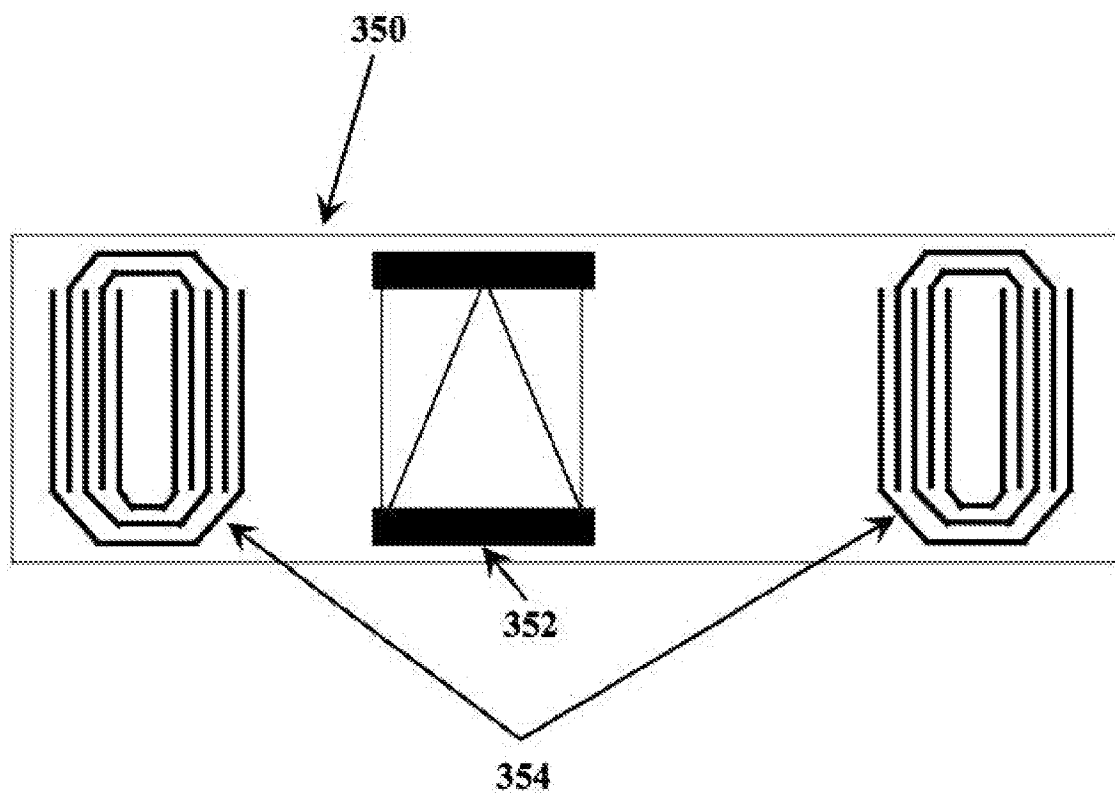


Figure 17A

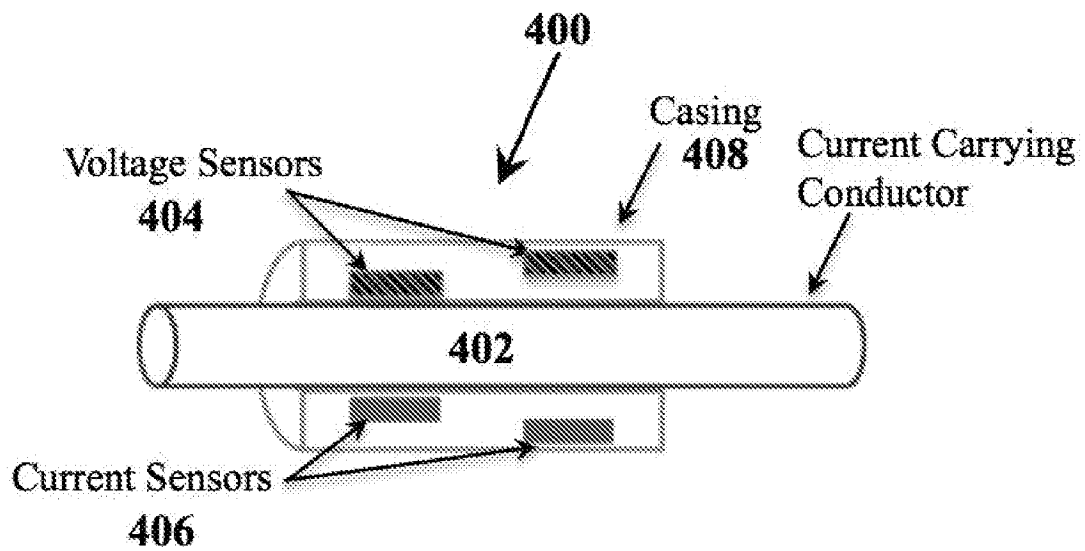


Figure 17B

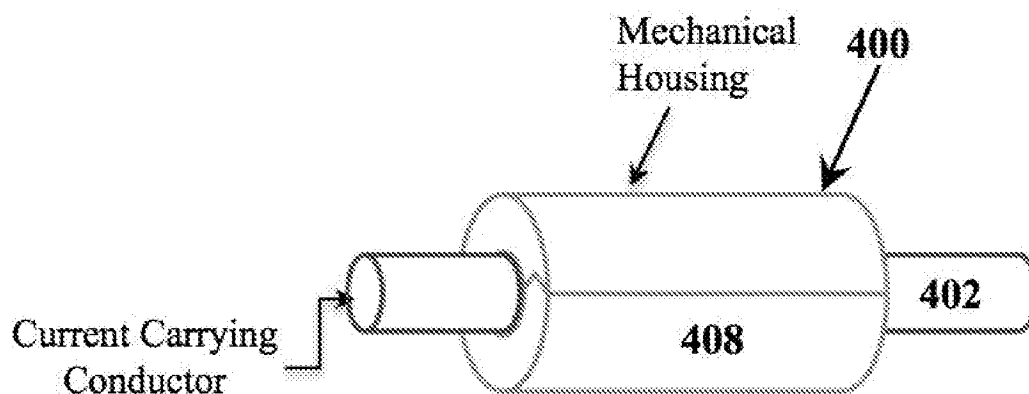


Figure 18

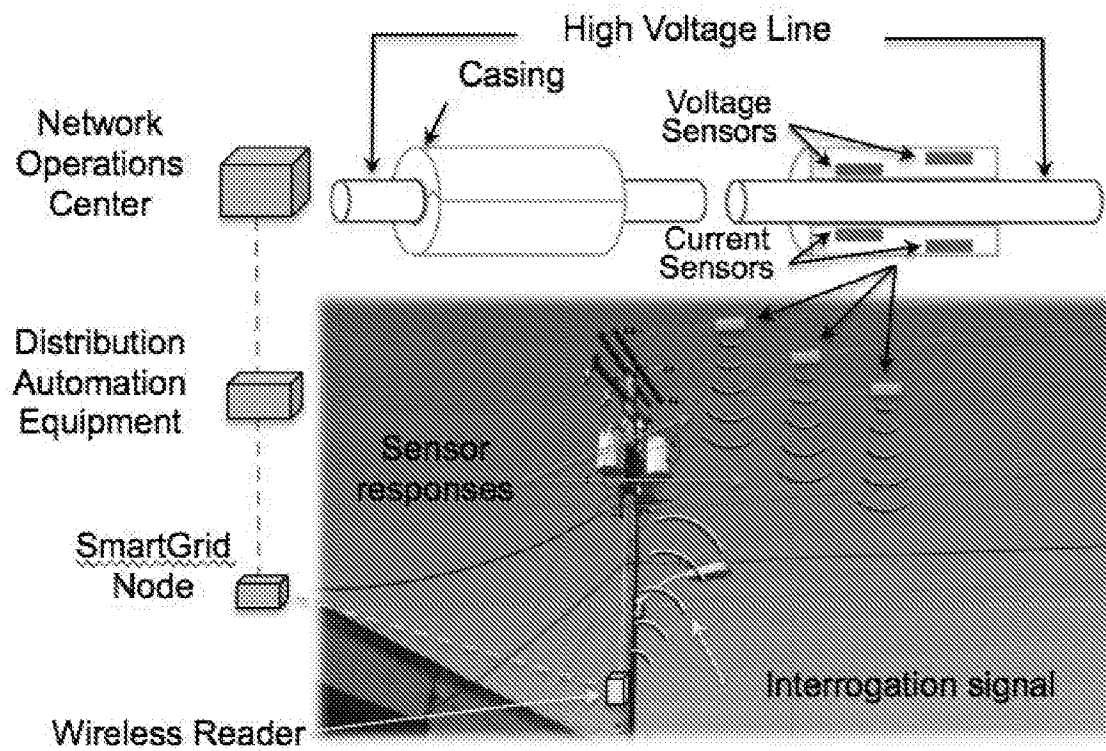


Figure 19

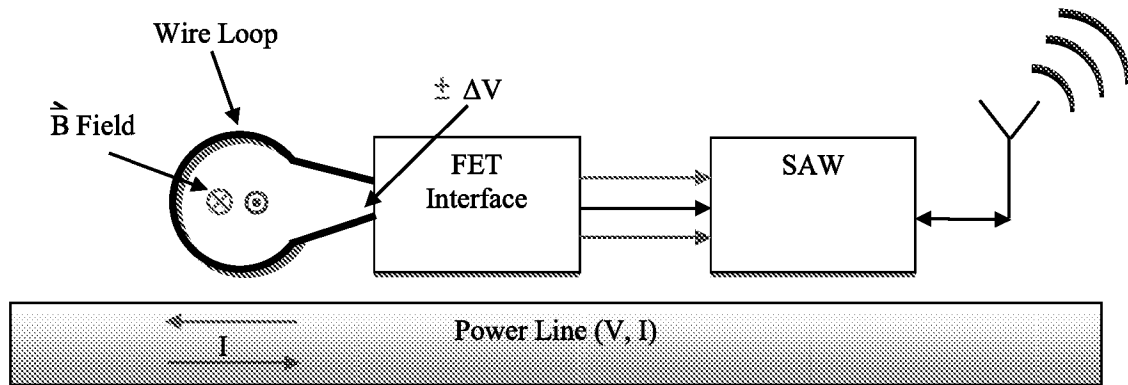


Figure 20



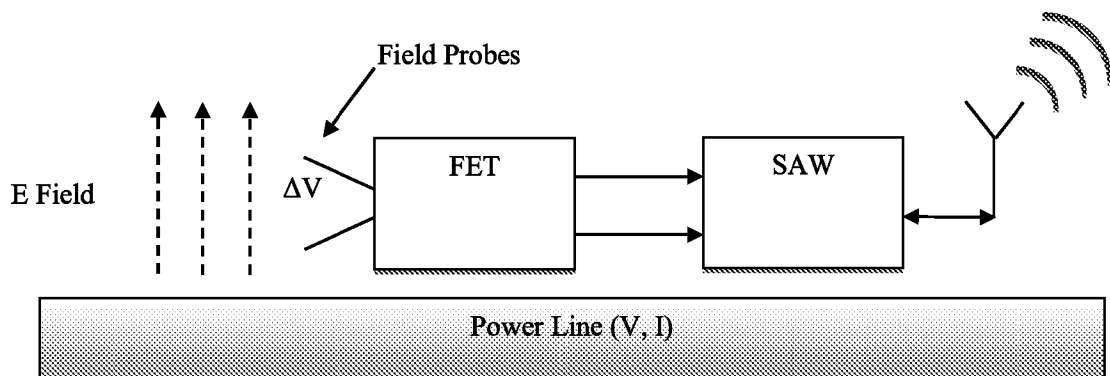


Figure 21

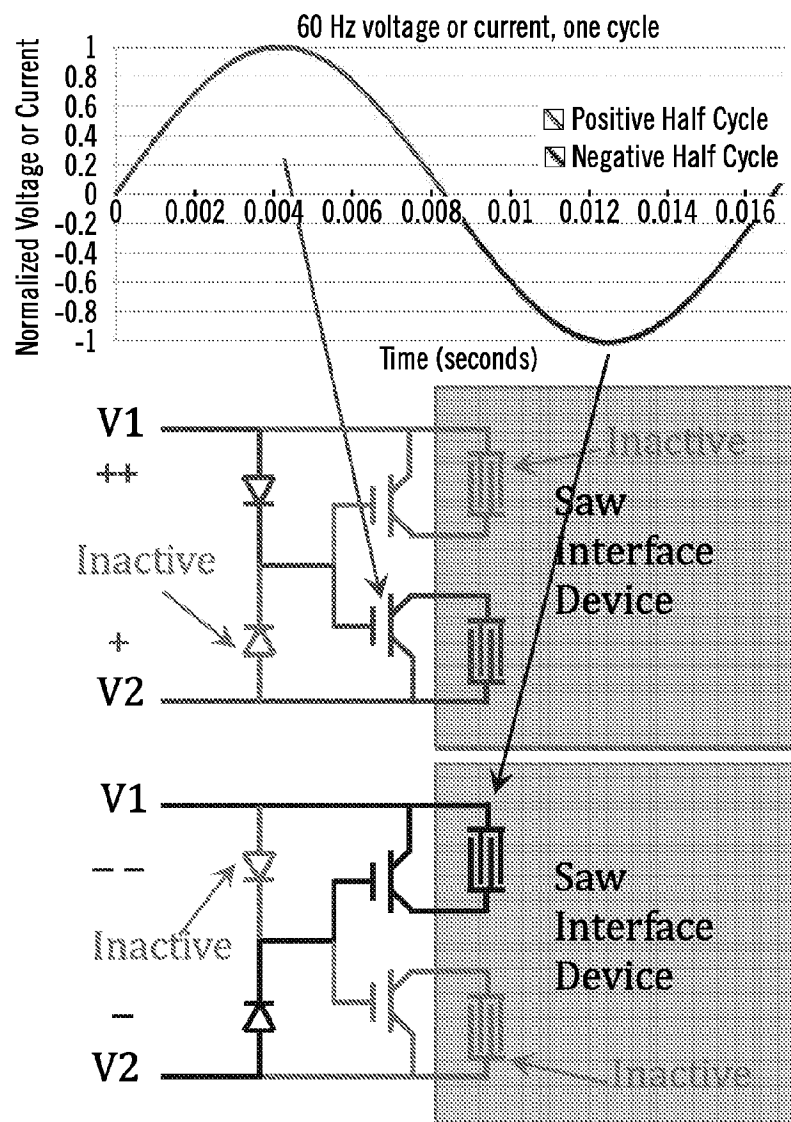

SUBSTITUTE SHEET (RULE 26)

Figure 22

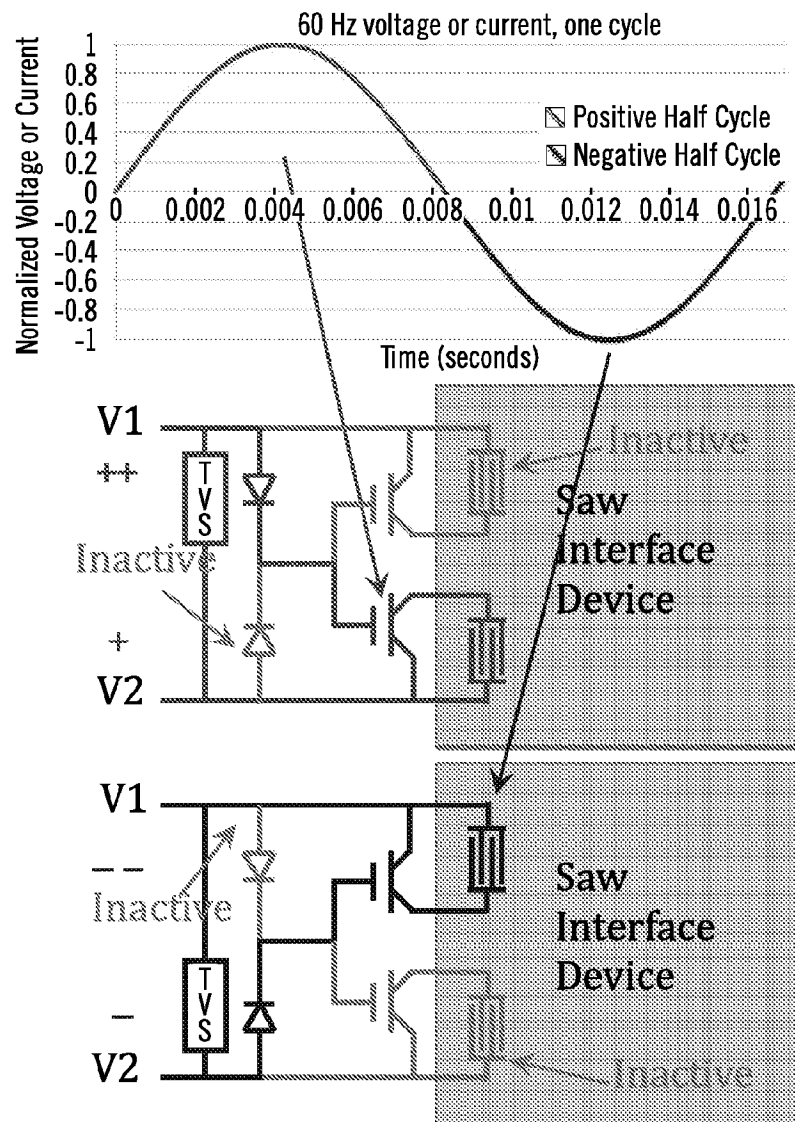

SUBSTITUTE SHEET (RULE 26)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 62189936 [0001]
- US 7268662 B [0003]
- US 7434989 B [0003]
- US 7500379 B [0003]
- US 7791249 B [0003]
- US 8094008 B [0003]
- US 8441168 B [0003] [0010] [0011]
- US 9121754 B [0003]
- US 679607 [0003]
- US 20130130362 A1 [0003]
- US 694889 [0003]
- US 20130181573 A1 [0003]
- US 20120197558 A1 [0013]
- US 20090206844 A1 [0014]

Non-patent literature cited in the description

- **MARSHALL ; NEWTON ; PAIGE.** Theory and Design of the Surface Acoustic Wave Multistrip Coupler. *IEE Transactions on Sonics and Ultrasonics*, April 1973, vol. SU-20 (2), 124-133 [0005]
- Surface Acoustic Wave Multistrip Components and Their Applications. *IEE Transactions on Sonics and Ultrasonics*, April 1973, vol. SU-20 (2), 134-143 [0005]
- **DANICKI.** Bulk Wave Transmission by a Multistrip Coupler (MSC). *Archives of Acoustics*, 1998, 125-137 [0005]
- **BROWN.** Low-Loss Device Using Multistrip Coupler Ring Configuration with Ripple Cancellation. *IEEE Ultrasonics Symposium*, 1986, 71-76 [0009]
- Passive Wireless Sensor Tags. **BROCATO.** Sandia Report SAND2006-1288. Sandia National Laboratories, March 2006 [0011]
- **REINDL et al.** Theory and Application of Passive SAW Radio Transponders as Sensors. *IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control*, September 1998, vol. 45 (5), 1281-1292 [0011]
- **SCHOLL et al.** Wireless Passive SAW Sensor Systems for Industrial and Domestic Applications. *Proceedings of the 1998 IEEE International Frequency Control Symposium*, p., 1998, 595-601 [0011]
- **SCHIMETTA et al.** A Wireless Pressure-Measurement System Using a SAW Hybrid Sensor. *IEEE Transactions on Microwave Theory and Technique*, December 2000, vol. 48 (12), 2730-2733 [0011]
- *the final report for NASA SBIR Phase I contract NNX09CE49P*, 22 July 2009 [0012]
- **BROCATO.** Re-Configurable Completely Unpowered Wireless Sensors. *Proceedings of the 57th Electronic Components and Technology Conference*, 2007, 179-183 [0015]
- **HAUSER.** Wirelessly Interrogable Magnetic Field Sensor Utilizing Giant Magneto-Impedance Effect and Surface Acoustic Wave Devices. *IEEE Transactions on Instrumentation and Measurement*, June 2000, vol. 49 (3), 648-652 [0016]
- **DANICKI.** Theory of Surface Acoustic Wave Reversing Multistrip Coupler. *Archives of Acoustics*, January 1994, 227-238 [0043]