

TNZ F/5 : 2000
TEST REPORT




Project : Quality Assurance
Location : Front Sand Pit
Client : Wilson Resources Ltd
Contractor : -
Sampled by : Client
Date sampled : Not Stated
Sampling method : Bulk Sample
Sample description : Pit SAND
Sample condition : As received
Source : Front Sand Pit

Project No : 2-68123.00
Lab Ref No : HA11611_DS
Client Ref No :

Particle Size Distribution			
Sieve Size (mm)	Percentage Passing		
	Sample	Lower Limit	Upper Limit
9.5	100	100	100
4.75	100	90	100
2.36	96	80	100
1.18	87	50	95
0.6	61	30	75
0.3	22	10	30
0.15	3	0	10
0.075	1	0	0

Result obtained from an oven dried test sample.

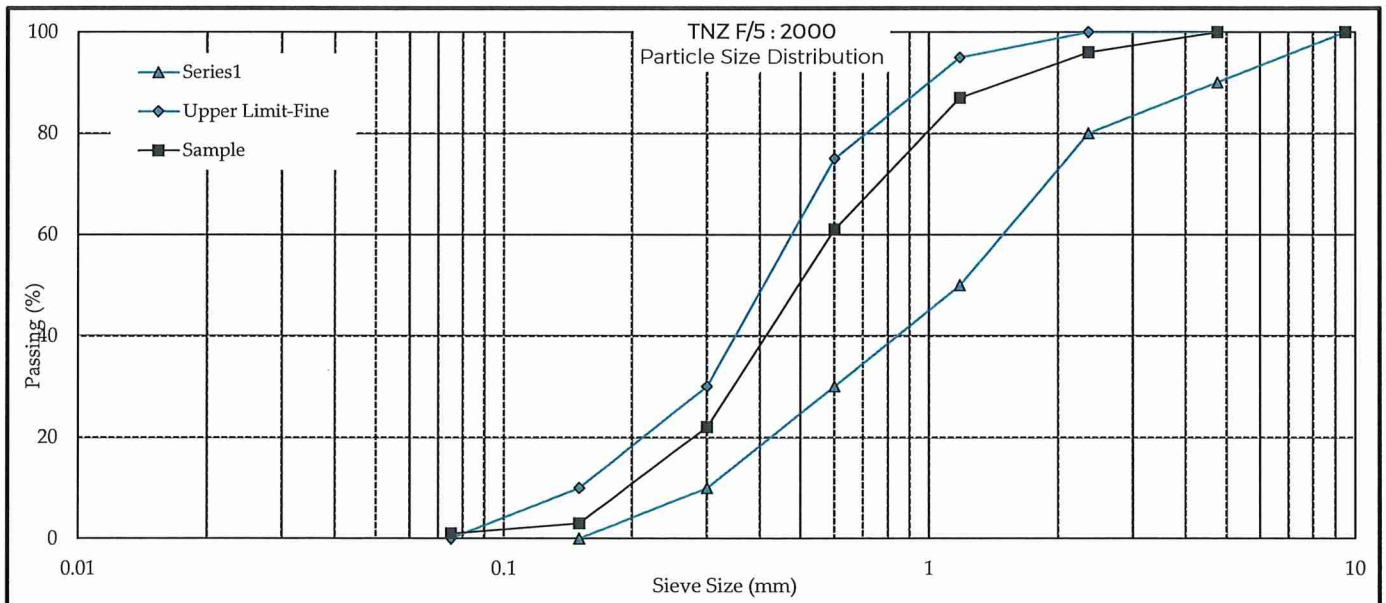

Test Methods	
Particle Size Distribution	NZS 4402 : 1986 : Test 2.8.2

Date tested : 21/09/2023
Date reported : 25/09/2023

Sampling is not covered by IANZ Accreditation. Results apply only to sample tested.
This report may only be reproduced in full
All information supplied by Client

Approved Signatory

Designation : Senior Civil Engineering Technician
Date : 25/09/2023



Test results indicated as not accredited are outside the scope of the laboratory's accreditation