




U86C4x32

Power Line EMI Filter

1. Dimensions

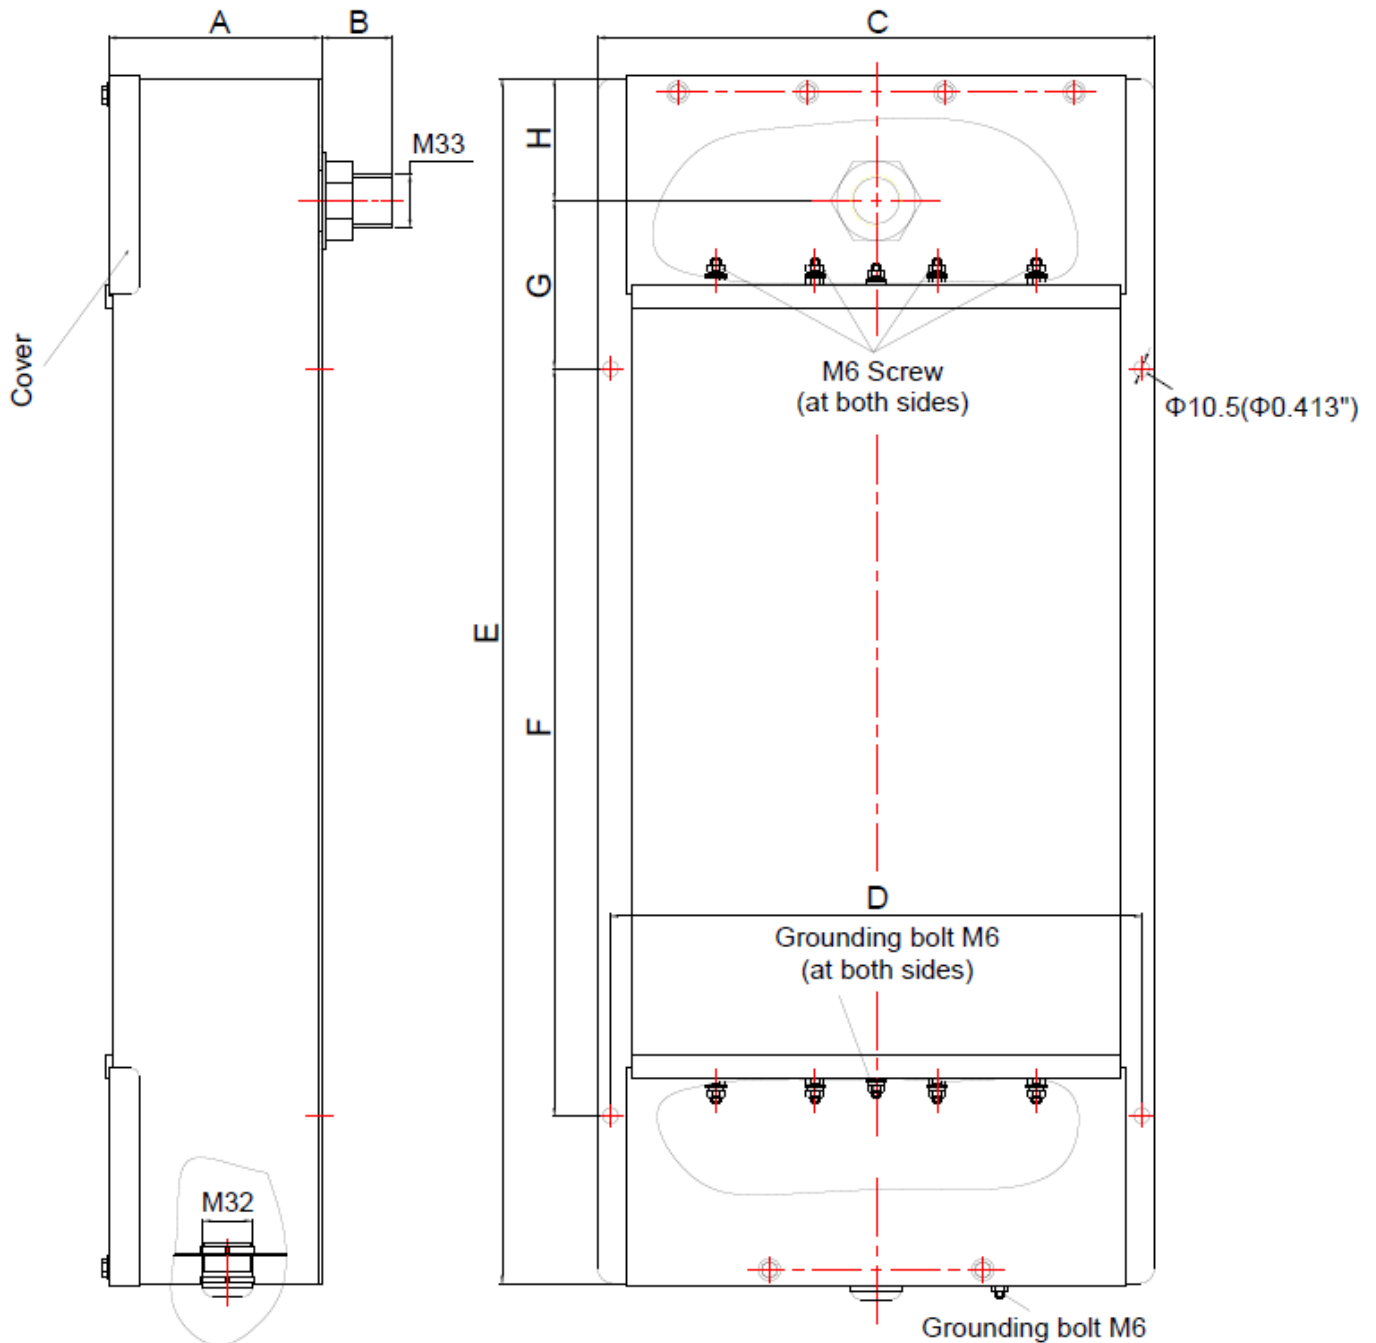

	A	B	C	D	E	F	G	H
mm	120	45	305	288	750	450	110	80
Inch	4.72	1.77	12.01	11.34	29.53	17.72	4.33	3.15

Tolerance: $\pm 0.02\text{in}$ / $\pm 0.5\text{mm}$



Rated Voltage	480VAC/277VAC
Operating Frequency	0-60Hz
Rated Current	4x32A
Leakage Current	3.1mA (@250VAC,50Hz)
Shielding Effectiveness	100dB, 14kHz-40GHz
Insertion Loss	100dB, 200kHz-40GHz
Climatic Category	25/085/21
Hi-pot Test	1200VDC, 2 SEC

Diagram illustrating the rear panel assembly. The components shown include:

- shielding wall
- emi gasket
- output
- conduit screw
- gasket
- Fixing screws M10 (Included)
- emi gasket
- screw nut
- Cover

- ① M33 Conduit Screw: 1pc
- ② Gasket 33: 1pc
- ③ M33 Screw Nut: 1pc
- ④ EMI Gasket 33: 1pc
- ⑤ Cable Gland M32: 1pc
- ⑥ Certificate: 1pc