



PRODUCT CATALOGUE

HEMEL[®]

Excellence in Wood Coatings



Why HEMEL?

- **Deep-Rooted Heritage:** With 60 years of experience in wood protection and care, HEMEL stands on a legacy of excellence.
- **Trusted Partnerships:** HEMEL values strong partnerships and delivers tailored solutions to customers around the globe.
- **Innovation-Driven:** HEMEL embraces innovation through sustainable practices and advanced formulations for high-performance wood solutions.
- **Exceptional Quality:** Through rigorous testing, HEMEL provides premium wood care and protection products known for their durability and outstanding performance.
- **Standards-Compliant Production:** HEMEL ensures compliance with top safety and environmental regulations, including REACH and CLP, for responsible and sustainable production.
- **Customer-Centric Approach:** HEMEL places customer satisfaction at the core, offering bespoke solutions, excellent service, and responsive support.
- **Extensive Product Range:** HEMEL meets the demands of both indoor and outdoor wood care markets with a wide variety of product offerings.
- **Sustainable Practices:** Sustainability is a priority at HEMEL; we minimize ecological impact by providing environmentally friendly alternatives.
- **Reliability and Consistency:** Since 1966, HEMEL has been a trusted name in wood care, renowned for reliable and consistent performance.
- **Expert Technical Support:** HEMEL's technical team is ready to assist with everything from application guidance to troubleshooting; ensuring optimal results every step of the way.

HEMEL®
Excellence in Wood Coatings

HEMEL®	About Us	2
	Milestones	3
	ISO Quality Certificates	4
	EN 71-3 Certificates	5
Exterior	HEMEL® Timbercare Aqua	8
	HEMEL® Timbercare B+	9
	HEMEL® Decor Aqua Clear Primer	10
	HEMEL® Decor Ultra Wood Stain	11
	HEMEL® Decor Ultra Aqua Wood Stain	12
	HEMEL® Hybrid Wood Stain	13
	HEMEL® Classic Wood Stain	14
	HEMEL® Decor Aqua Decorative Colorant	15
	HEMEL® Varnish for Exterior	16
	HEMEL® Yacht Varnish	17
	HEMEL® Decor Aqua Universal Primer	18
	HEMEL® Decor Breather Paint	19
	HEMEL® Decor Aqua Breather Paint	20
	HEMEL® Opaque Wood Protection	21
	HEMEL® Rapid Oil	22
	HEMEL® Aqua Deck	23
	HEMEL® Ultrafill 100	24
	HEMEL® Paint Stripper	25
Decking	HEMEL® Deck Restorer	28
	HEMEL® Teak Oil	29
	HEMEL® Deck Oil	30
	HEMEL® Composite Oil	31
	HEMEL® Exotic Oil	32
	HEMEL® Rapid Oil	33
	HEMEL® Aqua Deck	34
	HEMEL® Deck Stain	35
Interior	HEMEL® Ultrafill 500	38
	HEMEL® Kitchenware Oil	39
	HEMEL® Hardwax Oil	40
	HEMEL® Wood Oil 2C	41
	HEMEL® Sauna Oil	42
	HEMEL® Rapid Oil	43
	HEMEL® Ultramat®	44
	HEMEL® Home	45
	HEMEL® Heavy Traffic	46
	HEMEL® Floor Essential	47
	HEMEL® Floor Performance	48
	HEMEL® Invisible	49
	HEMEL® Sport Varnish System	50
	HEMEL® SL 1C Wood Floor Finish	51
	HEMEL® Decor Aqua Decorative Colorant	52
	HEMEL® Varnish for Interior	53
	HEMEL® Panel Door Paint	54
Other Products	HEMEL® Aqua Stone	55
Fire Retardants	Fire Retardant Systems	56
	HEMEL® FR Fire Retardant Solution	57
Industrial Wood Preservative	Tanalith	58
Application & Maintenance Information	Areas of Use	59
	Product Usage Table	61
	Wood Protection and Maintenance Guide	69
	Easy and Quick Maintenance with HEMEL Products	70

Milestones



1966 • Hickson Timber Impregnation Co. Ltd. establishes Turkey's first timber impregnation plant.

1983 • Introducing the first-ever long-lasting exterior breather paint.

1992 • Introducing the first one-component water-based wood floor finish.

1997 • The first "Class 1" certified fire-retardant system is introduced to the market.



2002 • Introducing the first environmentally friendly arsenic-free vacuum pressure treatment products to the Turkish Timber Treatment Industry.

2005 • The first entry into the do-it-yourself market in Bauhaus and B&Q stores.

2010 • The newly established HEMEL plant in Tuzla started manufacturing wood coatings.

2011 • ISO 9001 and OHSAS 18001 Quality Certifications achieved.

2012 • The research and development department was established.

• Production focused on water-based and sustainability-oriented coating technologies



2016 • HEMEL celebrated its 50th year in the industry with a fresh logo and updated packaging.

2017 • Introducing the first ultramat water-based wood floor finish and VOC-free wood oil.



2018 • The Prime brand was established to provide a cost-effective solution for wood coatings.

• Introducing the first water-based sports hall wood floor finish.

2019 • TSE-ISO 10002 Customer Satisfaction Management System Certification achieved.



2020 • The Restol brand was acquired from Lonza Wood Protection.

• HEMEL Marine Products were introduced to the marine market.

2023 • Introducing the first scratch & UV resistant all-purpose oil for all wooden surfaces.



2025 • Strategic transformation into Specialized Coatings marked by the launch of the X-Paint brand for multi-surface, metal, and concrete paint technologies.

• Established Color Pro Tinting System

2026 • Completion of second manufacturing facility (11,500 m²) to scale performance coatings production.

• Exports reached 32 countries, and 400 sales points were reached in the domestic market



VISION

To lead the transformation of wood into the most sustainable and enduring material of modern construction.

MISSION

To protect, enhance, and extend the life of wood through advanced technologies, enabling our partners to build a more sustainable world and a greener legacy for future generations.

Established in Istanbul in 1966 as a Turkish-British partnership, **HEMEL Wood Coatings** has been a pioneer in the wood preservation and coating industry for more than five decades. Today, HEMEL exports premium-quality wood coatings to **32 countries worldwide**, including key markets such as the **Netherlands, the United States, France, Russia, and Singapore.**

With a strong international presence and strategic partnerships, HEMEL has earned a reputation as a **trusted and preferred brand** in both residential and professional wood care segments.

Driven by innovation, we continually invest in **research and development** to stay ahead of global trends. Our focus on **cutting-edge technologies, sustainable practices, and eco-friendly formulations** ensures that our products not only deliver exceptional performance but also support a healthier planet.

As we move forward, HEMEL remains committed to delivering **uncompromising quality, technological excellence, and outstanding customer service.** With decades of expertise, a broad global footprint, and a diverse product portfolio, **HEMEL is your reliable partner for all wood coating solutions.**

ISO Quality Certificates



Our manufacturing process is certified in accordance with ISO 9001 (Quality Management) and ISO 45001 (Occupational Health and Safety Management) standards.

These certifications have been awarded by Bureau Veritas under the document numbers TR009983-2 and TR009984-2, demonstrating our commitment to excellence, safety, and continuous improvement.



Our sales and after-sales processes are certified in accordance with the TSE-ISO 10002 Customer Satisfaction Management System standard.

This certification, issued under document number MY-225/18, reflects our commitment to delivering exceptional customer service and continuously improving customer satisfaction.



**ISO 9001
UKAS**



**ISO 45001
UKAS**



**IQNet TSE-ISO
10002**



TSE-ISO 10002

At HEMEL®, we prioritize health as much as durability. Our products are formulated in strict compliance with European Standard EN 71-3 (Safety of Toys), ensuring that migration levels of heavy metals-such as lead, arsenic, and mercury-remain well within safe limits. Independently tested and certified, HEMEL® provides peace of mind for living spaces, ensuring a high level of safety even for the most sensitive users: our children.





WeatherGuard

Timeless Protection. Unmatched Beauty.

Specially engineered for outdoor wooden surfaces, WeatherGuard is HEMEL's premium wood protection system that delivers both lasting durability and refined aesthetics. Developed with UV-Resistant Pigment Pastes and advanced Moisture Release Technology, it forms a powerful barrier against harsh weather conditions.

This innovative formula helps prevent cracking, preserves the wood's natural look, and keeps it looking beautifully new for years.

With WeatherGuard, your wood withstands time-beautifully.



EXTERIOR

Specially formulated products for the maintenance and protection of your exterior cladding, pergolas, fences, windows, doors and shutters.

(*) Products with the WeatherGuard system



Water-based
Wood Preserver



Water-based
Wood Preserver



Water-based
Clear Primer



Solvent-based
Wood Oil*



Water-based
Wood Oil*



Solvent-based Wood Stain*

Solvent-based Wood Stain

Water-based Wood Stain*

Water-based Wood Stain*

Solvent-based Opaque Wood Paint*

Water-based Opaque Wood Paint*

Water-based Opaque Wood Paint

Water-based Opaque Primer

Water-based Wood Dye

Water-based Clear Top Coat*

Solvent-based Clear High-gloss Top Coat*

Gel-based Paint Remover

Water-based Acrylic Wood Filler

HEMEL® Timbercare Aqua

Water-based clear wood preserver for brush and dipping application

*For pine and similar softwoods to be painted and used above ground level.



Brush or
dipping



Interior/
Exterior

General Features:

- Prevents decay from fungi and insects
- Clear
- Odorless
- Complies with European Norms
- Ready to use

Where to Use:

- Exterior softwoods used above ground level and intended to be painted

Coverage:

- Brush: 4-5 m²/L (1 coat)
- Dipping: 15 L/m³

Packaging Size:

- 1 L
- 5 L
- 15 L
- 200 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Clear

HEMEL® Timbercare B+

Water-based wood preserver for dipping and brush application



Brush or
dipping



Interior/
Exterior

General Features:

- Easy application (brush or dipping)
- Odorless
- Complies with European Norms
- Ready to use

Where to Use:

- Exterior softwoods used above ground level and intended to be painted

Coverage:

- Brush: 4-5 m²/L (1 coat)
- Dipping: 15 L/m³

Packaging Size:

- 5 L
- 15 L
- 200 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Brown



Clear



Green

HEMEL® Decor Aqua Clear Primer

Water-based exterior clear primer for use with water-based and solvent-based translucent wood stains



Flow coating, dipping,
spray gun, brush, cloth
or roller



Interior/
Exterior



General Features:

- Allows wood to breathe
- Promotes topcoat adhesion
- Delivers a more uniform finish color
- High surface saturation
- Extra protection on ThermoWood®
- Reduces overlapping and brush marks
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Suitable for all exterior wood except floors
- Doors and window joinery
- Shutters
- Cladding
- Fences
- Pergolas
- Balcony railings
- Roof fringes

Coverage:

- 12-14 m²/L (1 coat)

Packaging:

- 2,5 L
- 15 L



For detailed product
information and technical
documentation, scan the QR
code or visit www.hemel.com.tr



Clear

HEMEL® Decor Ultra Wood Stain



Solvent-based high-performance translucent exterior wood stain that allows wood to breathe



Brush



Exterior



General Features:

- Water repellent
- Allows wood to breathe
- Semi-transparent finish
- Durable and resistant to exterior weather conditions
- UV resistant
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Does not crack, peel or blister
- Ready to use

Where to Use:

- Suitable for all exterior wood except floors
- Doors and window joinery
- Shutters
- Cladding
- Fences
- Pergolas
- Balcony railings
- Roof fringes

Coverage:

- 6-7 m²/L (2 coats)

Packaging:

- 0,750 L
- 2,5 L
- 5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



	Antique Pine		Natural		Light		Chestnut		Teak
	Walnut		Western**		Calif		Rosewood		Tanatone Brown**
	Burma		Creol		Tanalith Green**		Olive**		Jade**
							Warm Grey**		Ebon**

*See: Page 5, EN 71-3 Toy Safety Standard

**Available in 2,5 L cans only.

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Decor Ultra Aqua Wood Stain



Water-based high-performance translucent exterior wood stain that allows wood to breathe



Brush



Interior/
Exterior



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

General Features:

- Water repellent
- Allows wood to breathe
- Translucent wood finish
- Durable and resistant to exterior weather conditions
- UV resistant
- Does not crack, peel or blister
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Suitable for all exterior wood except floors
- Doors and window joinery
- Shutters
- Cladding
- Fences
- Pergolas
- Balcony railings
- Roof fringes

Coverage:

- 6-7 m²/L (2 coats)

Packaging:

- 0,750 L
- 2,5 L
- 5 L
- 15 L



	Antique Pine		Natural		Light		Chestnut		Teak
	Walnut		Western**		Calif		Rosewood		Tanatone Brown**
	Burma		Creol		Tanalith Green**		Olive**		Jade**
							Warm Grey**		Ebon**

*See: Page 5, EN 71-3 Toy Safety Standard

**Available in 2,5 L cans only.

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Hybrid Wood Stain

Water-based all-weather wood stain that protects, colors, and revitalizes exterior wood



Brush



Interior/
Exterior



General Features:

- Water repellent
- Highly resistant to UV** radiation, moisture, and outdoor weathering conditions
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Suitable for all exterior wood except floors
- Doors and window joinery
- Shutters
- Cladding
- Fences
- Pergolas
- Balcony railings

Coverage:

- 6-7 m²/L (2 coats)

Packaging Size:

- 0,750 L
- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Clear



Pine



Natural



Honey



Teak



Burma



Walnut



Hazelnut

*See: Page 5, EN 71-3 Toy Safety Standard **Except Clear color

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Classic Wood Stain

Solvent-based classic wood stain



Brush



Exterior

General Features:

- Silky-glossy finish
- Reduces moisture uptake
- Minimizes crack formation
- Water repellent
- Resistant to UV* and exterior weather conditions
- Ready to use

Where to Use:

- Suitable for all exterior wood except floors
- Doors and window joinery
- Shutters
- Cladding
- Fences
- Pergolas
- Balcony railings
- Roof fringes

Coverage:

- 15-20 m²/L (1 coat)

Packaging Size:

- 0,750 L
- 2,5 L
- 15 L

SOLVENT



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Light Oak



Burma



Walnut



Chestnut



Dark Walnut



Dark Oak



Clear



Teak



Green

*Except Clear color

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Decor Aqua Decorative Colorant

Water-based translucent penetrating wood dye



Brush, cloth
or dipping



Interior/
Exterior



General Features:

- Natural look
- Deep rich tones that enhance the wood grain
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Suitable for all interior/ exterior wood
- Doors and window joinery
- Shutters
- Cladding
- Fences
- Pergolas
- Balcony railings
- Roof fringes
- Interior wooden flooring
- Panels
- Wooden ceilings

Coverage:

- 10-12 m²/L (1 coat)

Packaging:

- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



HD 2021



HD 2024



HD 2011



HD 2013



HD 2018



HD 2046



HD 2060



HD 2022



HD 2019



HD 2026



HD 2033

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Varnish for Exterior

Durable water-based clear coat for exterior wood protection



Brush



Exterior



General Features:

- Transparent
- Water repellent
- Elastic
- UV absorber inside
- Allows wood to breathe
- UV resistant if used with HD Series colorants
- Does not crack, peel or blister
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Suitable for all exterior wood except floors
- Doors and window joinery
- Shutters
- Cladding
- Fences
- Pergolas
- Balcony railings
- Roof fringes

Coverage:

- 3-4 m²/L (2 coats)

Packaging:

- 2,5 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Warning: The product, should be applied over HEMEL Decor Aqua Decorative Colorant to achieve maximum UV protection.



Clear

HEMEL® Yacht Varnish

Elastic, UV-resistant, and water-repellent, high gloss solvent-based varnish



Brush



Exterior



ADDED UV
PROTECTION



General Features:

- Clear
- High-gloss
- Elastic
- Perfect leveling
- Increased resistance to UV
- Water-repellent
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Solid wood and plywood for both inside and outside of boats above the waterline
- Suitable for all exterior wood except floors
- Cladding

Coverage:

- 12-14 m²/L (1 coat)

Packaging:

- 0,750 L
- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Warning: For extra resistance to sunlight (UV), apply HEMEL Decor Aqua Decorative Colorant under the product.



Clear

HEMEL® Decor Aqua Universal Primer

Water-based non-yellowing exterior primer for use with solvent-based and water-based breather paints



Brush



Interior/
Exterior



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

General Features:

- Used as a primer under water and solvent based opaque paints.
- Promotes topcoat adhesion
- Improves performance of topcoat
- Prevents the topcoat from yellowing by acting as a barrier when applied to exotic and resinous timbers.
- Allows wood to breathe
- Excellent flexibility
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Suitable for all exterior wood except floors
- Doors and window joinery
- Shutters
- Cladding
- Fences
- Pergolas
- Balcony railings
- Roof fringes
- Restorations

Coverage:

- 10 m²/L (1 coat)

Packaging:

- 2,5 L
- 15 L



White

HEMEL® Decor Breather Paint

High-performance solvent-based exterior weatherproof opaque wood paint



Brush



Exterior



General Features:

- Water repellent
- Allows wood to breathe
- Opaque wood finish
- Durable and resistant to exterior weather conditions
- UV resistant
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Does not crack, peel or blister
- Ready to use

Where to Use:

- Suitable for all exterior wood except floors
- Doors and window joinery
- Shutters
- Cladding
- Fences
- Pergolas
- Balcony railings
- Roof fringes
- Restorations

Coverage:


- 5 m²/L (2 coats)

Packaging:

- 0,750 L
- 5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Polar White



Unlimited color alternatives*

*See: Page 5, EN 71-3 Toy Safety Standard

**Special orders in NCS and RAL colors are available exclusively at locations with the Color Pro tinting system.

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Decor Aqua Breather Paint

High-performance water-based exterior weatherproof opaque wood paint



Brush

Interior/
Exterior

General Features:

- Water repellent
- Allows wood to breathe
- Opaque wood finish
- Durable and resistant to exterior weather conditions
- UV resistant
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Does not crack, peel or blister
- Ready to use

Where to Use:

- Suitable for all exterior wood except floors
- Doors and window joinery
- Shutters
- Cladding
- Fences
- Pergolas
- Balcony railings
- Roof fringes
- Restorations

Coverage:


- 5 m²/L (2 coats)

Packaging:

- 0,750 L
- 2,5 L
- 5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Polar
WhiteDeep Sky
Blue**Anthracite
Grey**

Sienna**

Unlimited color
alternatives***

*See: Page 5, EN 71-3 Toy Safety Standard

**Available in 2,5 L cans only.

***Special orders in NCS and RAL colors are available exclusively at locations with the Color Pro tinting system.

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Opaque Wood Protection

Silk-matte opaque paint designed for interior and exterior wood, panel doors, metal, and mineral surfaces



Brush, roller
or airless
spray gun



Interior/
Exterior



General Features:

- High hiding power
- Non-yellowing
- Resistant to UV and exterior weather conditions
- Water-repellent
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Wooden surfaces except floors
- Metals
- Panel doors
- Mineral surfaces such as plaster, concrete, and drywall

Coverage:


- 10-12 m²/L (1 coat)

Packaging Size:

- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



White

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Rapid Oil

Fast-drying matte oil for all wooden surfaces—resistant to scratches and UV rays



Brush, cloth
or roller



Interior/
Exterior



General Features:

- Beautiful natural finish
- Water repellent
- UV resistant
- Reduces splintering
- High abrasion and scratch resistance
- Easy maintenance
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- All exterior wooden surfaces
- Decks
- Solid or engineered hardwood flooring
- Interior solid and veneered wooden surfaces
- Solid or veneered tables, chairs, and other furniture

Coverage:


- 8-10 m²/L (1 coat)

Packaging:

- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Black
(1 Coat)

Black
(2 Coats)



Brown
(1 Coat)

Brown
(2 Coats)



Coffee
(1 Coat)

Coffee
(2 Coats)



Gray
(1 Coat)

Gray
(2 Coats)



Maple
(1 Coat)

Maple
(2 Coats)



Smoked Oak
(1 Coat)

Smoked Oak
(2 Coats)



Teak
(1 Coat)

Teak
(2 Coats)



Walnut
(1 Coat)

Walnut
(2 Coats)



White
(1 Coat)

White
(2 Coats)

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Aqua Deck

New-generation water-based hybrid oil for exterior wooden surfaces-ideal for decks, garden furniture, and cladding



Brush, cloth
or roller



Exterior



General Features:

- Non-film forming structure
- Enhanced UV resistance
- No darkening effect on ThermoWood®
- Preserves the wood's natural appearance
- Accentuates the wood grain with deep, rich tones
- Odorless
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Fences
- Decks
- Garden Furniture
- Pergolas
- Cladding
- ThermoWood® surfaces

Coverage:

- 10-12 m²/L (1 coat)

Packaging:

- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Walnut



Light Walnut



Teak



Natural



Light Oak



Pine



Mustard

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Ultrafill 100

High-performance wood filler for wood repairs used prior to water or solvent-based opaque wood paint applications



Spatula



Exterior

General Features:

- To fill smaller openings and capillary cracks like joints and nail heads
- Fast drying
- High filling power
- Easy to sand and paint
- Successive application in short intervals
- Ready to use

Where to Use:

- Suitable for all facade wood applications except floors
- Door and window joinery
- Wainscot
- Cladding
- Fences
- Balcony railings
- Restorations

Packaging:

- 1,3 kg



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



White

HEMEL® Paint Stripper

High-performance gel paint remover for interior and exterior use – free from toluene and NMP



Brush, roller
or airless
spray gun



Interior/
Exterior



General Features:

- Strips paint in one step
- Suitable for water-based and solvent-based paints
- Free from toluene, NMP, caustic substances, acids, and strong solvent odors.
- Ready to use

Where to Use:

- Wood
- Metals including light metals and copper
- Concrete, natural stone, and other mineral surfaces

Coverage:

- 1-3 m²/L (1 coat)

Packaging:

- 0,750 L
- 2,5 L
- 15 L



For detailed product
information and technical
documentation, scan the QR
code or visit
www.hemel.com.tr



NaturGuard

Specially developed for wooden decks and garden furniture, NaturGuard provides long-lasting protection while preserving the wood's natural appearance. Its oil-based formula penetrates deep into the surface, creating a flexible and durable shield that resists harsh weather throughout the year.

Formulated with eco-friendly, plant-based ingredients, NaturGuard moves with the wood—preventing cracks and splintering while enhancing overall durability. By supporting sustainable living and maintaining the wood's original texture and warmth, NaturGuard keeps your outdoor surfaces naturally beautiful for years to come.

With NaturGuard, your wood's true beauty endures—season after season—with unmatched, natural protection.



DECKING

Protect and revive your deck and garden furniture with our easy-to-apply products.



Natural Oil-based
Deck Oil*

Natural Oil-based
Hardwood Oil*

(*) Products with the NaturGuard system



Solvent-based
Wood Oil*



Water-based
Deck Oil*



Solvent-based
Teak Oil



Solvent-based
Composite Oil




Water-based
Deck Stain



Water-based
Deck Cleaner & Restorer

HEMEL® Deck Restorer

Water-based clear restorer for weathered decks and garden furniture without sanding



Garden broom



Exterior

General Features:

- Fast and easy application
- Safe for plants and grass
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Decks
- Garden furniture

Coverage:

- 8-10 m²/L (1 coat)

Packaging:

- 2,5 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

This product is clear and has no color chart.

HEMEL® Teak Oil

Premium teak oil for exterior wood and garden furniture maintenance



Brush or
roller and
cloth



For detailed product
information and technical
documentation, scan the QR
code or visit
www.hemel.com.tr

General Features:

- Penetrates deeply
- Nourishes and revives
- Easy maintenance
- Water repellent
- Salt water resistant
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- For exterior wood and garden furniture
- Suitable for all exterior wood of boats above the waterline

Coverage:

- Softwoods: 10-12 m²/L (1 coat)
- Hardwoods: 15-18 m²/L (1 coat)

Packaging:

- 0,750 L
- 2,5 L
- 5 L
- 15 L

Warning: Oil-soaked cloths used during application may spontaneously combust. After use, soak thoroughly in water and dispose of in accordance with local regulations.



Clear

HEMEL® Deck Oil

One-coat oil for long-lasting & superior protection of wooden decks



Brush or
roller



Exterior



General Features:

- Beautiful natural finish
- Non-film forming
- UV resistant
- Reduces splintering
- Water repellent
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Decks

Coverage:

- Softwoods: 10-12 m²/L (1 coat)
- Hardwoods: 15-18 m²/L (1 coat)

Packaging:

- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Warning: Oil-soaked cloths used during application may spontaneously combust. After use, soak thoroughly in water and dispose of in accordance with local regulations.



Antique
Pine



Light
Oak



Teak



Tanatone
Brown



Walnut

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Composite Oil

Single-coat composite oil providing UV resistance, water repellency, and a natural finish.



Brush or
roller



Exterior



General Features:

- Beautiful natural finish
- Non-film forming
- Resists mold & mildew growth
- UV resistant
- Water repellent
- One-coat protection
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Composite surfaces

Coverage:

- 10-18 m²/L (1 coat)

Packaging:

- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Warning: Oil-soaked cloths used during application may spontaneously combust. After use, soak thoroughly in water and dispose of in accordance with local regulations.



Natural

HEMEL® Exotic Oil

Deep-penetrating oil for the maintenance of hardwoods, ThermoWood®, decks, and garden furniture



Brush, cloth,
roller or
dipping



Exterior



General Features:

- Beautiful natural finish
- Non-film forming
- Increased resistance to UV
- Easy maintenance of local patches
- Water repellent
- Reduces splintering
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Hardwoods, ThermoWood®, decks and garden furniture

Coverage:

- Softwoods: 10-12 m²/L (1 coat)
- Hardwoods: 15-18 m²/L (1 coat)

Packaging:

- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Warning: Oil-soaked cloths used during application may spontaneously combust. After use, soak thoroughly in water and dispose of in accordance with local regulations.



Natural



Mustard



Hazelnut



Brown

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Rapid Oil

Fast-drying matte oil for all wooden surfaces—resistant to scratches and UV rays



Brush, cloth
or roller



Interior/
Exterior

General Features:

- Beautiful natural finish
- Water repellent
- UV resistant
- Reduces splintering
- High abrasion and scratch resistance
- Easy maintenance
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- All exterior wooden surfaces
- Decks
- Solid or engineered hardwood flooring
- Interior solid and veneered wooden surfaces
- Solid or veneered tables, chairs, and other furniture

Coverage:


- 8-10 m²/L (1 coat)

Packaging:

- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Black
(1 Coat)

Black
(2 Coats)



Brown
(1 Coat)

Brown
(2 Coats)



Coffee
(1 Coat)

Coffee
(2 Coats)



Gray
(1 Coat)

Gray
(2 Coats)



Maple
(1 Coat)

Maple
(2 Coats)




Smoked Oak
(1 Coat)

Smoked Oak
(2 Coats)



Teak
(1 Coat)

Teak
(2 Coats)



Walnut
(1 Coat)

Walnut
(2 Coats)



White
(1 Coat)

White
(2 Coats)

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Aqua Deck

New-generation water-based hybrid oil for exterior wooden surfaces-ideal for decks, garden furniture, and cladding



Brush, cloth
or roller



Exterior



General Features:

- Non-film forming structure
- Enhanced UV resistance
- No darkening effect on ThermoWood®
- Preserves the wood's natural appearance
- Accentuates the wood grain with deep, rich tones
- Odorless
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Fences
- Decks
- Garden Furniture
- Pergolas
- Cladding
- ThermoWood® surfaces

Coverage:

- 10-12 m²/L (1 coat)

Packaging:

- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Walnut



Light Walnut



Teak



Natural



Light Oak



Pine



Mustard

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Deck Stain

Protective and breathable deck stain with anti-slip micro particles and long-lasting UV resistance



Brush or
roller



Exterior



General Features:

- Semi-transparent
- Allows wood to breathe
- High UV resistant
- Anti-slip features with micro particles
- Water repellent
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Decks

Coverage:

- 6-7 m²/L (2 coats)

Packaging:

- 2,5 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Light



Teak

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.



IntraGuard

IntraGuard is a high-performance wood protection system engineered for interior surfaces exposed to heavy foot traffic. With superior scratch resistance and a durable protective layer, it safeguards your floors from daily wear and tear—keeping them looking as pristine as the day they were finished.

Ideal for homes, offices, and high-use commercial spaces, IntraGuard not only delivers exceptional durability but also enhances your wood floors with a rich, elegant finish that elevates any interior.

For long-lasting performance, visual appeal, and peace of mind, trust IntraGuard—where strength meets beauty.



INTERIOR

Protect your parquet, furniture and all other indoor woods from wear and scratches using our innovative water-based or oil-based products.

(*) Products with the IntraGuard system



Water-based
Wood Dye

Water-based
Panel Door Paint

Solvent-based
Wood Oil



Solvent-based
One Component
Parquet Varnish*

Water-based
Sports Hall Parquet
Coating System



Water-based
One/two Component
Ultra-matte Parquet
Varnish*



Water-based
One Component
Parquet Varnish



Water-based
One Component
Parquet Varnish



Water-based
Two Component
Parquet Varnish*



Water-based
Two Component
Parquet Varnish*



Water-based
Two Component
Mega-matte Parquet
Varnish*



Oil-based
Two Component
Parquet and Furniture
Oil*



Oil-based
One Component
Parquet and Furni-
ture Oil



Water-based
Clear Topcoat



Water-based
Sauna Oil



Oil-based
Kitchenware Oil

HEMEL® Ultrafill 500 Interior

Water-based, ready-to-use wood repair filler for interior use



Spatula



Interior

General Features:

- Ready-to-use, easy to apply
- Fine-grained texture provides smooth surface
- Shrink and crack resistant
- Fast drying
- Easy to sand, leaves a smooth finish
- Accepts paint and varnish applications
- High filling capacity
- VOC-free

Where to Use:

- Interior furniture production
- Doors, windows and joinery
- Wooden panels, claddings, and wallboards
- Nail holes, knots, and crack repairs
- Restoration works

Coverage:

- 1 coat (2 or 3 coats for deep cracks)

Packaging:

- 200 g tube



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



501
White



502
Natural



503
Pine



504
Beech



505
Oak



506
Teak



507
Walnut



508
Dark
Walnut



509
Anthracite



510
Wenge

HEMEL® Kitchenware Oil

Food-safe certified natural oil for wooden kitchenware and utensils



Cloth



Interior



Tested and approved for food contact according to the LFGB standard.



General Features:

- Tested & certified according to LFGB standard for food contact
- Does not contain VOC
- Preserves and revives the natural appearance of wood
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Wooden kitchenware

Coverage:

- 30 m²/L (1 coat)

Packaging:

- 175 ml
- 1 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Clear

HEMEL® Hardwax Oil

One-component natural oil and carnauba wax blend for all indoor wooden surfaces



Brush, cloth
or polishing
machine



Interior



General Features:

- One-coat protection
- Non-film forming
- Enhance the natural beauty of wood
- High abrasion and scratch resistance
- No overlaps marking
- Water repellent
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Extremely high coverage rate

Where to Use:

- Wood floorings
- Suitable for all interior wood
- Wooden table, chairs, kitchen worktops, and furniture
- Previously oiled interior woods and furniture

Coverage:

- 30 m²/L depending on wood type and application method

Packaging:

- 500 ml
- 2,5 L
- 15 L (Upon request)



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

WARNING: Oil-soaked cloths used during application may spontaneously combust. After use, soak thoroughly in water and dispose of in accordance with local regulations.



Castle
Brown



Chocolate



Clear



Dark
Oak



English
Color



Natural

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to oak. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Wood Oil 2C


Two-component VOC-free natural oil finish with outstanding scratch resistance for interior wooden surfaces



Brush, cloth
or polishing
machine



Interior



General Features:

- One-coat protection
- Non-film forming
- Beautiful natural finish
- High abrasion and scratch resistance
- No overlaps or starting marks
- Water repellent
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits

Where to Use:

- Wood floorings
- Suitable for all interior wood
- Wooden tables, chairs, kitchen worktops and furniture

Coverage:

- 30 m²/L (1 coat)

Packaging:

- 250 ml Part A + 50 ml Part B
- 0,750 L Part A + 0,150 L Part B
- 2,5 L Part A + 0,5 L Part B



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Warning: Oil-soaked cloths used during application may spontaneously combust. After use, soak thoroughly in water and dispose of in accordance with local regulations.



*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to oak. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Sauna Oil

Water-based oil that nourishes, protects, and enhances sauna wood in just one coat



Brush or
roller



Interior



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

General Features:

- One-coat protection
- Extends the life of sauna wood by preventing wood splitting
- Durable elastic heat-resistant coating
- Reduces moisture absorption
- Fast drying
- Beautiful natural finish
- Non-film forming
- Water repellent
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Low-odor
- Easy application
- Ready to use

Where to Use:

- All untreated interior wooden surfaces of sauna steam rooms (benches, panels, flooring, ceilings).

Coverage:

- Softwoods: 10-12 m²/L (1 coat)
- Hardwoods: 15-18 m²/L (1 coat)

Packaging:

- 2,5 L



Clear

HEMEL® Rapid Oil

Fast-drying matte oil for all wooden surfaces—resistant to scratches and UV rays



Brush, cloth
or roller



Interior/
Exterior

General Features:

- Beautiful natural finish
- Water repellent
- UV resistant
- Reduces splintering
- High abrasion and scratch resistance
- Easy maintenance
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- All exterior wooden surfaces
- Decks
- Solid or engineered hardwood flooring
- Interior solid and veneered wooden surfaces
- Solid or veneered tables, chairs, and other furniture

Coverage:

- 8-10 m²/L (1 coat)


Packaging:

- 2,5 L
- 15 L

SOLVENT



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Black
(1 Coat)

Black
(2 Coats)



Brown
(1 Coat)

Brown
(2 Coats)



Coffee
(1 Coat)

Coffee
(2 Coats)



Gray
(1 Coat)

Gray
(2 Coats)



Maple
(1 Coat)

Maple
(2 Coats)




Smoked Oak
(1 Coat)

Smoked Oak
(2 Coats)



Teak
(1 Coat)

Teak
(2 Coats)



Walnut
(1 Coat)

Walnut
(2 Coats)



White
(1 Coat)

White
(2 Coats)

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Ultramat®

Water-based one/two-component ultra-matte varnish for interior wooden surfaces and flooring



Brush or roller



Interior



General Features:

- Extreme surface hardness and scratch resistance
- Beautiful natural finish and non-yellowing layer
- Odorless
- Elastic
- Better scratch and abrasion resistant surface with the hardener
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Suitable for all interior wood
- Wood floorings

Coverage:

- 12-15 m²/L (1 coat)

Packaging:

- 2,5 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Only available in ultramatte (<8 gloss) finish.

If required, HEMEL Decor Aqua Decorative Colorant can be used to stain wood floorings.

HEMEL® Home

High-performance water-based one-component varnish for home



Brush or roller



Interior



General Features:

- Odorless
- High resilience
- High abrasion and scratch resistance
- Easy to apply
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Wood floorings

Coverage:

- 4-5 m²/L (3 coats)

Packaging:

- 2,5 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Available in matte, silk-matte and high-gloss finish.

If required, HEMEL Decor Aqua Decorative Colorant can be used to stain wood floorings.

HEMEL® Heavy Traffic

Extreme-performance water-based two-component varnish for wood floorings



Brush or roller



Interior



General Features:

- Odorless
- Elastic
- Very high resilience
- Excellent abrasion and scratch resistance
- Non-yellowing
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Wood floorings

Coverage:

- 4-5 m²/L (3 coats)

Packaging:

- Varnish 5 L
- Hardener 0,500 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Available in matte and silk-matte finish.

If required, HEMEL Decor Aqua Decorative Colorant can be used to stain wood floorings.

HEMEL® Floor Essential

Water-based one component parquet varnish



Brush or roller



Interior



General Features:

- Odorless
- Hard and durable
- High abrasion and scratch resistance
- Easy maintenance
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits

Where to Use:

- Wooden floors

Coverage:

- 4-5 m²/L (3 coats)

Packaging Size:

- 5 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Floor Performance

Water-based two component parquet varnish



Brush or roller



Interior

General Features:

- Odorless
- Hard and durable
- High abrasion and scratch resistance
- Ready to use

Where to Use:

- Wooden floors

Coverage:

- 14-5 m²/L (3 coats)

Packaging Size:

- 5 L (Varnish), 0,500 L (Hardener)



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Invisible

Two-component, water-based, plant-based varnish mega-matte coat for indoor wooden floors and furniture



Brush, roller, or
spray gun



Interior



General Features:

- Odorless
- Very high resilience
- Velvet surface appearance
- Excellent abrasion and scratch resistance
- Non-yellowing
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Wooden Floors and Furnitures

Coverage:

- 12-15 m²/L (2 coats)

Packaging:

- Varnish 5 L
- Hardener 0,500 L



For detailed product
information and technical
documentation, scan the
QR code or visit
www.hemel.com.tr

Available in mega-matte finish.

If required, HEMEL Decor Aqua Decorative Colorant can be used to stain wood floorings.

HEMEL® Sport Varnish System

Water-based non-slip glossy parquet polish developed for wooden floors of sports and fitness halls



Brush or roller



Interior



General Features:

- Odorless
- Elastic
- Unlimited color options*
- High filling power primer and varnish
- Glossy
- Non-slip high-gloss finish
- High wear and scratch resistance
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Wooden sports floorings

Coverage:

- Sport Primer: 6-7 m²/L (2 coats)
- Sport Colors: 10 m²/L (1 coat)
- Sport Varnish: 6-7 m²/L (2 coats)

Packaging:

- Sport Primer: 10 L
- Sport Colors: 2,5 L
- Sport Varnish: 10 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Unlimited color alternatives**

*See: Page 5, EN 71-3 Toy Safety Standard

** Special orders in NCS and RAL colors are available exclusively at locations with the Color Pro tinting system.

HEMEL® SL 1C Wood Floor Finish

Durable, low-odour, next-gen solvent-based wood floor finish



Brush or roller



Interior



SOLVENT

General Features:

- New generation one component formulation
- Enhances the natural beauty of the wood
- High abrasion and scratch resistance
- Does not contain heavy solvent odor
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Wood floorings

Coverage:

- 4-5 m²/L (3 coats)

Packaging:

- 5 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Available in matte, semi-matte and high-gloss finish.

If required, HEMEL Decor Aqua Decorative Colorant can be used to stain wood floorings.

HEMEL® Decor Aqua Decorative Colorant

Water-based translucent penetrating wood dye



Brush, cloth
or dipping



Interior/
Exterior



General Features:

- Natural look
- Deep rich tones that enhance the wood grain
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Suitable for interior/exterior wood
- Doors and window joinery
- Shutters
- Cladding
- Fences
- Pergolas
- Balcony railings
- Roof fringes
- Interior wooden floorings
- Panels
- Wooden ceilings

Coverage:

- 10-12 m²/L (1 coat)

Packaging:

- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



HD 2021



HD 2024



HD 2011



HD 2013



HD 2018



HD 2046



HD 2060



HD 2022



HD 2019



HD 2026



HD 2033

*See: Page 5, EN 71-3 Toy Safety Standard

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Varnish for Interior

Clear, odorless, water-based varnish for elegant, natural-looking interior wood panels and ceilings



Brush or roller



Interior



General Features:

- Clear
- Odorless
- Enhances the natural beauty of wood
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Suitable for all interior wooden surfaces except floors
- Panels
- Wooden ceilings

Coverage:

- 7-8 m²/L (2 coats)

Packaging:

- 0,750 L
- 2,5 L
- 15 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Clear

If required, HEMEL Decor Aqua Decorative Colorant can be used to stain interior wooden surfaces.

HEMEL® Panel Door Paint

High hiding, water-based opaque panel door paint that preserves wood texture



Brush or roller



Interior

General Features:

- High opacity
- Keeps the texture of wood
- Odorless
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Panel doors

Coverage:


- 4-5 m²/L (2 coats)

Packaging:

- 0,750 L
- 2,5 L



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr



Polar White



Sea Shell



Cream



Unlimited color alternatives**

*See: Page 5, EN 71-3 Toy Safety Standard

**Special orders in NCS and RAL colors are available exclusively at locations with the Color Pro tinting system.

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

HEMEL® Aqua Stone®

Water-based clear water seal for bricks, mortar, and concrete with superb weather protection



Brush, roller or spraying



Exterior



General Features:

- Clear, does not change the surface appearance
- Non-film forming
- Prevents frost damage with high water repellency
- Protects the surface from rain, dust and efflorescence
- Reduces chalking
- Allow the surface to breathe
- EN 71-3 Certified - Compliant with Toy Safety Migration Limits
- Ready to use

Where to Use:

- Cement, concrete, slate
- Brick, tile, terracotta
- Unpolished absorbent natural and unnatural stones
- Historical restorations

Coverage:

- 5-15 m² depending on the surface type (2 coats)

Packaging:

- 5 L
- 20 L



For further information about the product or its technical documents, you may use the QR code or visit hemel.com.tr

This product is clear and has no color chart.

Fire Retardant Varnish Systems

HEMEL Pro FS Series – Certified water-based fire retardant systems available in semi-transparent or opaque finishes, developed to comply with international fire safety standards.

For product specifications, certifications, or technical consultation, please contact our Head Office.



HEMEL® FR Fire Retardant Solution

Water-based transparent fire retardant solution



Brush, roller
or dipping



Interior/
Exterior



General Features:

- Slows the spread of flame
- Can be applied to surfaces such as solid wood, MDF, and chipboard
- Clear
- Odorless
- Versatile application with brush/roller/dip
- Ready to use

Where to Use:

- All exterior and interior wooden surfaces except floors

Coverage:

- 4-5 m²/L (2 coats)

Packaging:

- 5 L
- 20 L



For further information about the product or its technical documents, you may use the QR code or visit hemel.com.tr



Clear


*See: Page 5, EN 71-3 Toy Safety Standard

**Special orders in NCS and RAL colors are available exclusively at locations with the Color Pro tinting system.

Please note that the colors displayed are meant to give an approximation of the final color when applied to pine. The actual color and gloss may differ depending on the type, texture, and absorbency of the individual piece of wood. The thickness of the film and the number of coats applied will also impact the final result. To get a clearer idea of the final color, we recommend applying the product to a sample of the wood you intend to use.

Tanalith™

Water-based, next-generation industrial wood preservative designed for use in modern vacuum pressure impregnation systems



Vacuum
pressure tank



Exterior



arxada

General Features:

- Applied in vacuum pressure treatment plants
- BARamine™ technology*
- Copper-azole based
- Does not cause corrosion on metal fixings
- Brown color option with Tanatone
- Complies with European Standards

Where to Use:

- Timbers used above ground level (UC3)
- Timbers in contact with ground (UC4)

Packaging:

- 1.200 kg IBC



For detailed product information and technical documentation, scan the QR code or visit www.hemel.com.tr

Green and brown color options are available for this product.
Please contact HEMEL for specific technical information and support.

(*) BARamine™ technology which awarded for innovation; improves penetration, performance and efficiency. It provides protection against many copper-tolerant decay fungi e.g. Butt rot and Antrrodia species.

Handwriting practice lines consisting of 30 horizontal dotted lines.


1



HEMEL Timbercare Aqua
HEMEL Decor Aqua Clear Primer
HEMEL Decor Ultra Wood Stain
HEMEL Decor Ultra Aqua Wood Stain
HEMEL Decor Breather Paint

HEMEL Decor Aqua Breather Paint
HEMEL Decor Aqua Universal Primer
HEMEL Yacht Varnish
HEMEL Timbercare B+
HEMEL Classic Wood Stain

HEMEL Hybrid
Wood Stain
HEMEL Opaque
Wood Protection

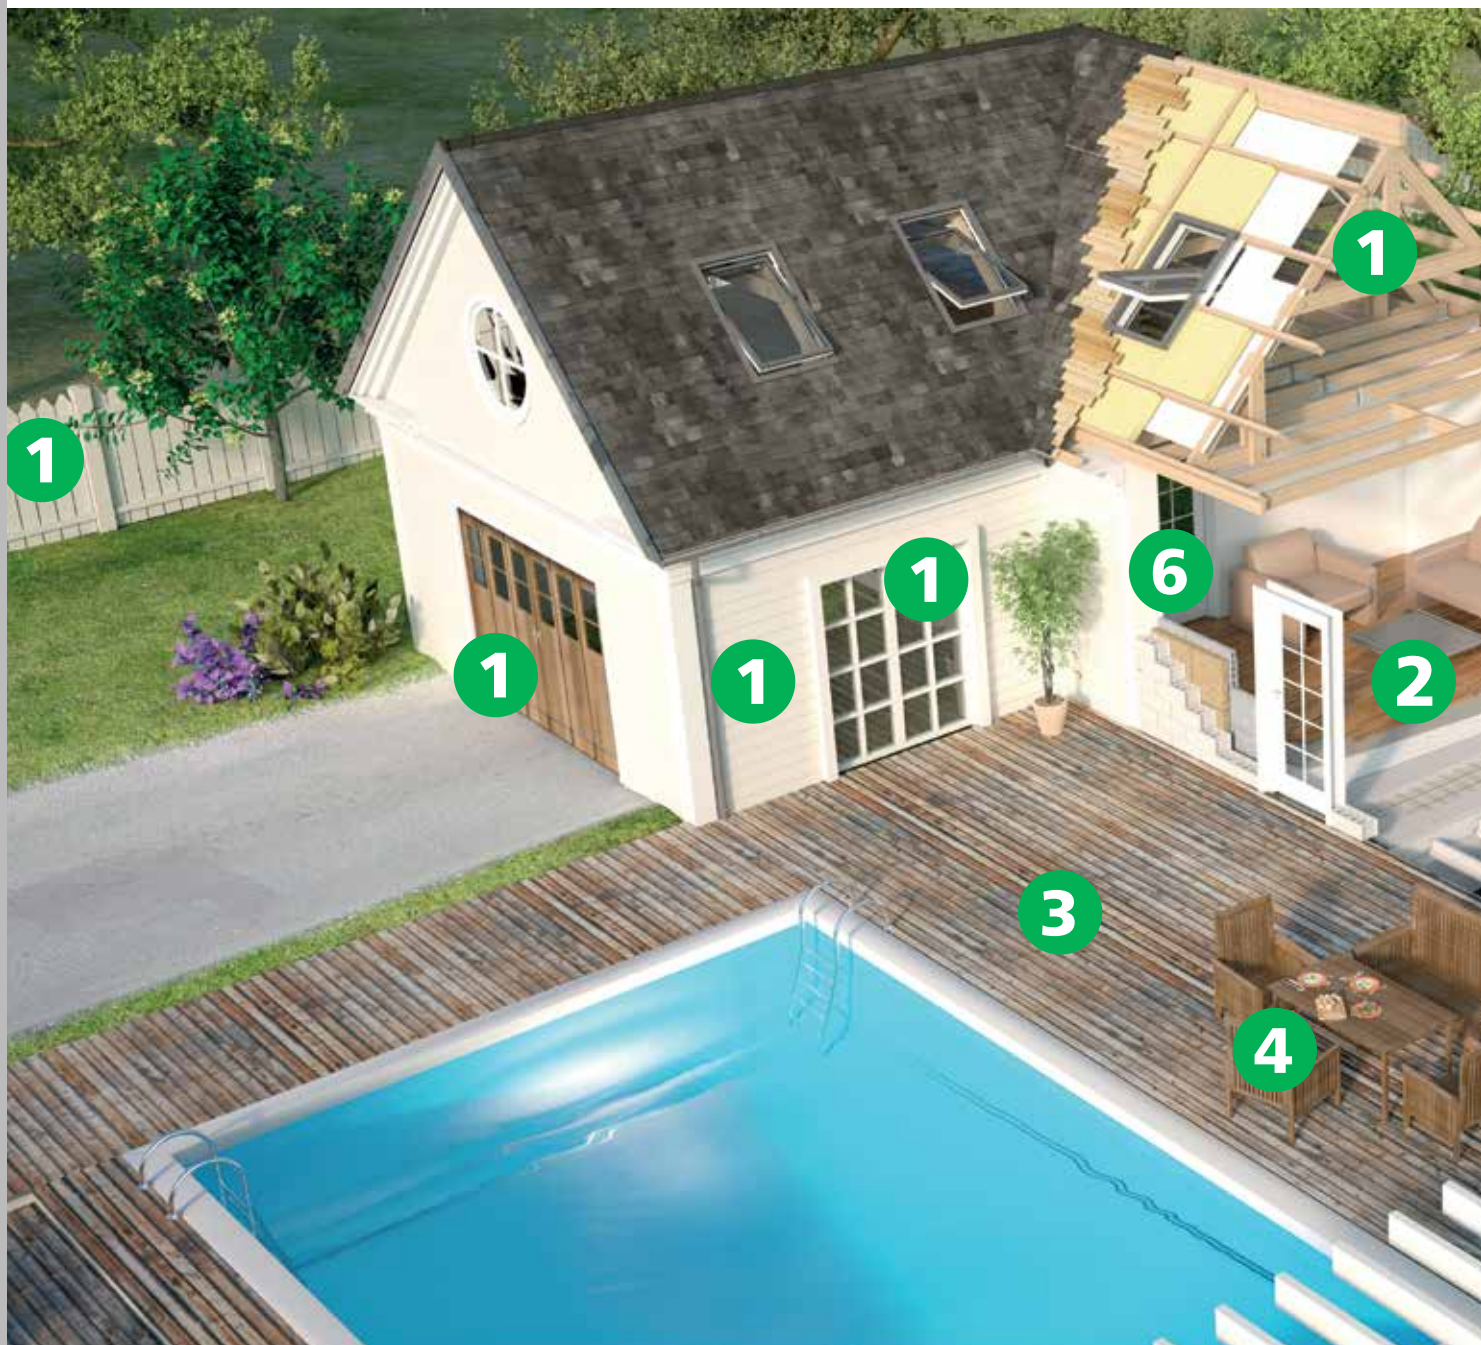

3



HEMEL Deck Oil
HEMEL Exotic Oil
HEMEL Rapid Oil
HEMEL Aqua Deck

4



HEMEL Teak Oil
HEMEL Exotic Oil
HEMEL Rapid Oil
HEMEL Aqua Deck

2



HEMEL Decor Aqua Decorative Colorant
HEMEL Ultramat
HEMEL Home
HEMEL Heavy Traffic
HEMEL Invisible

HEMEL Wood Oil 2C
HEMEL Hardwax Oil
HEMEL Kitchenware Oil
HEMEL Floor Essential
HEMEL Floor Performance



5



HEMEL Decor Aqua Decorative Colorant
HEMEL Ultramat
HEMEL Heavy Traffic
HEMEL Invisible
HEMEL Wood Oil 2C
HEMEL Rapid Oil
HEMEL Varnish for Interior

6



HEMEL Panel Door Paint
HEMEL Opaque Wood Protection

7



HEMEL Aqua Stone

		Areas of Use						
		Base	Cladding, Joinery, Doors, Shutters, Pergolas, Balcony Railings	Decks	Garden Furniture	Urban Furniture	Furniture	Wood Floors
Exterior	HEMEL® Timbercare Aqua s. 8	Water	✓	✓	✓	✓	✓	✓
	HEMEL® Timbercare B+ s. 9	Water	✓	✓	✓	✓	✓	✓
	HEMEL® DECOR Aqua Clear Primer s. 10	Water	✓					
	HEMEL® DECOR Ultra Wood Stain s. 11	Solvent	✓					
	HEMEL® DECOR Ultra Aqua Wood Stain s. 12	Water	✓					
	HEMEL® Hybrid Wood Stain s. 13	Water	✓					
	HEMEL® Classic Wood Stain s. 14	Solvent	✓					
	HEMEL® DECOR Aqua Decorative Colorant s. 15	Water	✓			✓	✓	✓
	HEMEL® Varnish for Exterior s. 16	Water	✓					
	HEMEL® Yacht Varnish s. 17	Solvent	✓					
	HEMEL® Decor Aqua Universal Primer s. 18	Water	✓					

				How to Use?			
Interior Decorative Wooden Elements	Kitchen & Bathroom Worktops	Wooden Kitchen Utensils	Panel Doors	Application Method	Number of Coats	Coverage with 1 Coat (m²/L.)	Additional Remarks
✓				Brush or dipping	1	Brush: 4-5 m² Dipping: 15 L./m³	The surface must be thoroughly wetted-available in clear
✓				Brush or dipping	1	Brush: 4-5 m² Dipping: 15 L./m³	The surface must be thoroughly wetted-available in clear and two semi-transparent colors.
				Flow coating, dipping, spray gun, brush, cloth or roller	1	12-14 m²	Used as a primer under water and solvent-based HEMEL Decor® Ultra Wood Stain.
				Brush	2	12-14 m²	Available in 17 semi-transparent colors.
✓				Brush	2	12-14 m²	Available in 17 semi-transparent colors.
✓				Brush	2	12-14 m²	Available in clear and seven semi-transparent colors.
				Brush	2-3	15-20 m²	Available in clear and eight semi-transparent colors.
✓				Brush, cloth or dipping	1	10-12 m²	Stir well before use. Available in 11 semi-transparent colors.
				Brush	2	14-16 m²	Warning: For extra resistance to sunlight (UV), apply HEMEL Decor Aqua Decorative Colorant under the product.
				Brush	3	12-14 m²	It is applied to wooden surfaces of boats above sea level. Warning: For extra resistance to sunlight (UV), apply HEMEL Decor Aqua Decorative Colorant under the product.
				Brush	1	10 m²	

		Areas of Use						
		Base	Cladding, Joinery, Doors, Shutters, Pergolas, Balcony Railings	Decks	Garden Furniture	Urban Furniture	Furniture	Wood Floors
Exterior	HEMEL® DECOR Breather Paint s. 19	Solvent	✓					
	HEMEL® DECOR Breather Paint s. 20	Water	✓					
	HEMEL® Opaque Wood Protection s. 21	Water	✓					
Decking	HEMEL® Rapid Oil s. 22	Oil	✓ (*)	✓	✓			✓
	HEMEL® Aqua Deck s. 23	Water	✓ (*)	✓	✓			
	HEMEL® Paint Stripper s. 25		✓			✓	✓	✓
	HEMEL® Deck Restorer s. 28	Water		✓	✓			
	HEMEL® Teak Oil s. 29	Oil		✓	✓			
	HEMEL® Deck Oil s. 30	Oil		✓	✓			
	HEMEL® Composite Oil s. 31	Oil		✓ Composite				
	HEMEL® Exotic Oil s. 32	Oil		✓	✓			

(*) Not suitable for joinery doors and shutters.

				How to Use?			
Interior Decorative Wooden Elements	Kitchen & Bathroom Worktops	Wooden Kitchen Utensils	Panel Doors	Application Method	Number of Coats	Coverage with 1 Coat (m²/L.)	Additional Remarks
				Brush	2	10 m²	Upon request, special colors can be produced using the NCS and RAL color charts.
				Brush	2	10 m²	Upon request, special colors can be produced using the NCS and RAL color charts.
✓			✓	Brush, roller or airless spray gun	2	10-12 m²	Suitable for interior and exterior wood, metal, mineral surfaces, and panel doors, excluding flooring.
✓				Brush, cloth or roller	1-2	8-10 m²	Available in 9 semi-transparent colors.
✓				Brush or roller	1-2	10-18 m²	Available in 4 semi-transparent colors.
✓			✓	Brush, roller or spray gun	2	1-3 m²	It does not contain toluene, NMP, caustic, acid-like harmful compounds and heavy odor.
				It is applied to unpainted and unvarnished wood with a medium hard brush.	1	8-10 m²	Allow the product to act for approximately 15 minutes, then brush the surface and rinse thoroughly with water.
				Brush or roller and cloth	1	10-18 m²	Provides seasonal maintenance.
				Brush or roller	1	10-18 m²	Available in 5 semi-transparent colors.
				Brush or roller	1	10-18 m²	Available in 1 semi-transparent color.
				Brush, roller, dipping or cloth	1-2	10-18 m²	Available in 4 semi-transparent colors.

		Areas of Use						
		Base	Cladding, Joinery, Doors, Shutters, Pergolas, Balcony Railings	Decks	Garden Furniture	Urban Furniture	Furniture	Wood Floors
Decking	HEMEL® Rapid Oil s. 33	Oil	✓ (*)	✓	✓		✓	✓
	HEMEL® Aqua Deck s. 34	Water	✓ (*)	✓	✓			✓
	HEMEL® Deck Stain s. 35	Water						
Interior	HEMEL® Kitchenware Oil s. 39	Oil						
	HEMEL® Hardwax Oil s. 40	Oil					✓	✓
	HEMEL® Wood Oil 2C s. 41	Oil					✓	✓
	HEMEL® Rapid Oil s. 43	Oil	✓ (*)	✓	✓		✓	✓
	HEMEL® Ultramat® s. 44	Water					✓	✓
	HEMEL® Home s. 45	Water						✓
	HEMEL® Heavy Traffic s. 46	Water					✓	✓
	HEMEL® Floor Essential s. 47	Water						✓
	HEMEL® Floor Performance s. 48	Water					✓	✓

				How to Use?			
Interior Decorative Wooden Elements	Kitchen & Bathroom Worktops	Wooden Kitchen Utensils	Panel Doors	Application Method	Number of Coats	Coverage with 1 Coat (m²/L.)	Additional Remarks
				Brush, cloth or roller	1-2	8-10 m²	Available in 9 semi-transparent colors.
				Brush or roller	1-2	10-18 m²	Available in 4 semi-transparent colors.
				Brush or roller	2	12-14 m²	Available in 9 semi-transparent colors.
		✓		Cloth	1	30 m²	Its suitability for food contact has been tested and approved according to the LFGB standard.
✓	✓			Brush, cloth or pad machine	1	30 m²	It can be used on all interior solid and veneered wooden surfaces. It is available in clear and 5 semi-transparent colors.
✓	✓			Brush, cloth or pad machine	1	30 m²	It can be used on all interior solid and veneered wooden surfaces. It is available in clear and 12 semi-transparent colors.
✓				Brush, cloth or roller	1-2	8-10 m²	Available in 9 semi-transparent colors.
✓	✓			Brush or roller	3	12-15 m²	It can be stepped on after 24 hours.
✓				Brush or roller	3	12-15 m²	It can be stepped on after 24 hours.
✓	✓			Brush or roller	3	12-15 m²	It can be stepped on after 24 hours.
✓				Brush or roller	3	12-15 m²	It can be stepped on after 24 hours.
✓	✓			Brush or roller	3	12-15 m²	It can be stepped on after 24 hours.

		Areas of Use						
		Base	Cladding, Joinery, Doors, Shutters, Pergolas, Balcony Railings	Decks	Garden Furniture	Urban Furniture	Furniture	Wood Floors
Interior	HEMEL® Invisible s. 49	Water					✓	✓
	HEMEL® SL 1C Wood Floor Finish s. 51	Solvent						✓
	HEMEL® DECOR Aqua Decorative Colorant s. 52	Water	✓			✓	✓	✓
	HEMEL® Varnish for Interior s. 53	Water						
	HEMEL® Panel Door Paint s. 54	Water						

Not suitable for joinery doors and shutters.

				How to Use?			
Interior Decorative Wooden Elements	Kitchen & Bathroom Worktops	Wooden Kitchen Utensils	Panel Doors	Application Method	Number of Coats	Coverage with 1 Coat (m²/L.)	Additional Remarks
✓	✓			Brush, roller or gun	2	12-15 m²	It can be stepped on after 24 hours.
✓				Brush or roller	3	12-15 m²	It can be stepped on after 24 hours.
✓				Brush, dipping or cloth	1	10-12 m²	Must be mixed thoroughly before use. Available in 11 semi-transparent colors.
✓				Brush or roller	2	14-16 m²	This product is also suitable for interior solid doors and paneling.
✓			✓	Brush or roller	2	8-10 m²	Any desired color can be produced on a special order basis using the NCS and RAL color charts.

Wood Protection and Maintenance Guide

Wood: A Healthy and Sustainable Building Material

Wood is a naturally renewable and environmentally friendly building material that offers numerous ecological and structural advantages. Its high load-bearing capacity, excellent insulation properties, and energy efficiency make it a preferred choice for sustainable construction. In addition to its aesthetic appeal and resilience against seismic activity, wood contributes to climate protection by naturally capturing and storing carbon dioxide. These qualities make wood an ideal material for building healthy, long-lasting, and environmentally responsible structures.



1. Tree Species and Resilience Classes

Natural Resilience of Tree Species

Resilience	Tree Species
Naturally Resilient	Teak, Oak, Merbau, Hornbeam, Iroko, Chestnut, Sapele, Ayous, Mahogany, Walnut, Cedar, Beech, Ash
Species without Resistance	Spruce, Alder, Poplar, Pine, Fir, Maple

Protection Requirements:

- **Naturally Resilient Species:** Surface protection (such as varnish, oil, or paint) is sufficient.
- **Species without Natural Resistance:** Require both impregnation (pre-treatment) and surface protection.



3. Wood Care: A Step-by-Step Guide

Preparation

- Remove old paint, varnish, wax, or oil.
- Sand the surface.
- Ensure wood moisture content is below 12% for interiors and 20% for exteriors.
- Remove resin and oil residues.
- Mask surrounding areas.

Application

- Stir the product thoroughly before use.
- Apply in the direction of the wood grain.
- Work in small sections to avoid lap marks.
- Begin application from the top down.
- Avoid product buildup in corners.

Protective Measures

- Wear gloves, safety goggles, and a respirator.
- Protect the working area with covers.



2. Natural Threats to Wood and Protection Methods

UV Radiation

- **Effect:** Degrades wood structure and causes greying.
- **Protection:** Use pigmented products with UV protection.

Moisture and Water

- **Effect:** Can cause cracking, fungal growth, and decay.
- **Protection:** Ensure waterproof construction design and apply protective surface coatings.

Fungi and Insects

- **Effect:** Feeds on sugars and starches in wood, leading to damage..
- **Protection:** Use impregnation and biocide-containing preservatives.



4. Structural Design Considerations

- **Bevelled and Rounded Edges:** Allow better coating film formation and prevent water retention.
- **Avoid Ground Contact and Large Roof Overhangs:** This reduces prolonged exposure to moisture.



5. Regular Maintenance for Long-Term Protection

- Inspect wooden surfaces every two years and perform maintenance as needed to ensure long-lasting protection and optimal appearance.



6. Technical Recommendations

- For optimal results, use HEMEL Wood Pro or HEMEL Ultra brushes.
- Do not apply under direct sunlight or during rainy weather.
- Read and follow the product's technical data sheet (TDS) carefully.

Easy and quick maintenance with HEMEL® products

71

Exterior Wood Maintenance:

- Painted or stained surfaces should be sanded or cleaned by HEMEL Paint Stripper.
- To provide long-life protection against decay, apply HEMEL Timbercare Aqua on untreated softwoods and wait 24 hours before applying the product.
- One of the HEMEL Decor Series, HEMEL Opaque Wood Protection, HEMEL Rapid Oil or HEMEL Aqua Deck is applied.

ThermoWood® Maintenance:

- Painted or varnished surfaces must be completely stripped of all coating residues by sanding or using HEMEL Paint Stripper.
- For cladding applications, first apply HEMEL Decor Aqua Clear Primer, followed by a product from the HEMEL Decor range or directly HEMEL Aqua Deck.
- For deck surfaces, use HEMEL Aqua Deck or HEMEL Exotic Oil.

Deck Maintenance:

- Painted or stained surfaces should be sanded and cleaned completely.
- To restore uncoated or oiled weathered decks without sanding, apply HEMEL Deck Restorer.
- To provide long-life protection against decay, apply HEMEL Timbercare Aqua on untreated softwoods and wait 24 hours before applying the product.
- For long-term protection and staining; use HEMEL Deck Oil. For seasonal refreshing and maintenance use HEMEL Exotic Oil, HEMEL Rapid Oil, HEMEL Aqua Deck or HEMEL Teak Oil.

Garden Furniture Maintenance:

- Painted or stained surfaces should be sanded and cleaned completely.
- To restore uncoated or oiled weathered garden furniture without sanding, apply HEMEL Deck Restorer.
- To provide long-life protection against decay, apply HEMEL Timbercare Aqua on untreated softwoods and wait 24 hours before applying the product.
- For seasonal refreshing and maintenance use HEMEL Exotic Oil, HEMEL Rapid Oil, HEMEL Aqua Deck or HEMEL Teak Oil.

Interior Wood Maintenance:

- Painted or varnished surfaces should be sanded and cleaned completely.
- Apply HEMEL Decor Aqua Decorative Colorant and HEMEL Varnish for Interior, HEMEL Ultramat, HEMEL Home, HEMEL Heavy Traffic, HEMEL Opaque Wood Protection, HEMEL Wood Oil 2C or HEMEL Hardwax Oil.

Wood Floor Maintenance:

- Varnished parquet surfaces should be sanded and cleaned completely.
- Apply HEMEL Wood Oil 2C, HEMEL Hardwax Oil, HEMEL Ultramat, HEMEL Home, HEMEL Heavy Traffic, HEMEL Essential, HEMEL Performance or HEMEL SL 1C Wood Floor Finish.

Panel Door Maintenance:

- Surfaces should be sanded and cleaned completely.
- Apply HEMEL Panel Door Paint or HEMEL Opaque Wood Protection.

Wooden Kitchen and Bathroom Worktop Maintenance:

- Worktop should be sanded and cleaned completely.
- If previously HEMEL Wood Oil 2C or HEMEL Hardwax Oil is used only slight sanding is sufficient.
- Apply HEMEL Wood Oil 2C or HEMEL Hardwax Oil on the sanded surface.


Wooden Kitchen Utensils Maintenance:

- Clean the wooden surface thoroughly with warm water and avoid any dirt or oil. After cleaning, let the wood dry for at least 8 hours.
- Apply HEMEL Kitchenware Oil generously on all sides of the wood with a lint-free cloth or paper towel.
- Leave the product on the surface for 30 minutes to be absorbed by the wood, then remove the excess oil on the surface with a lint-free cloth until you get a feeling of dryness.



Refer to the Technical Data Sheets of the products for detailed application instructions.

**With 60 Years of
Experience, Your Wood
is in Safe Hands!**

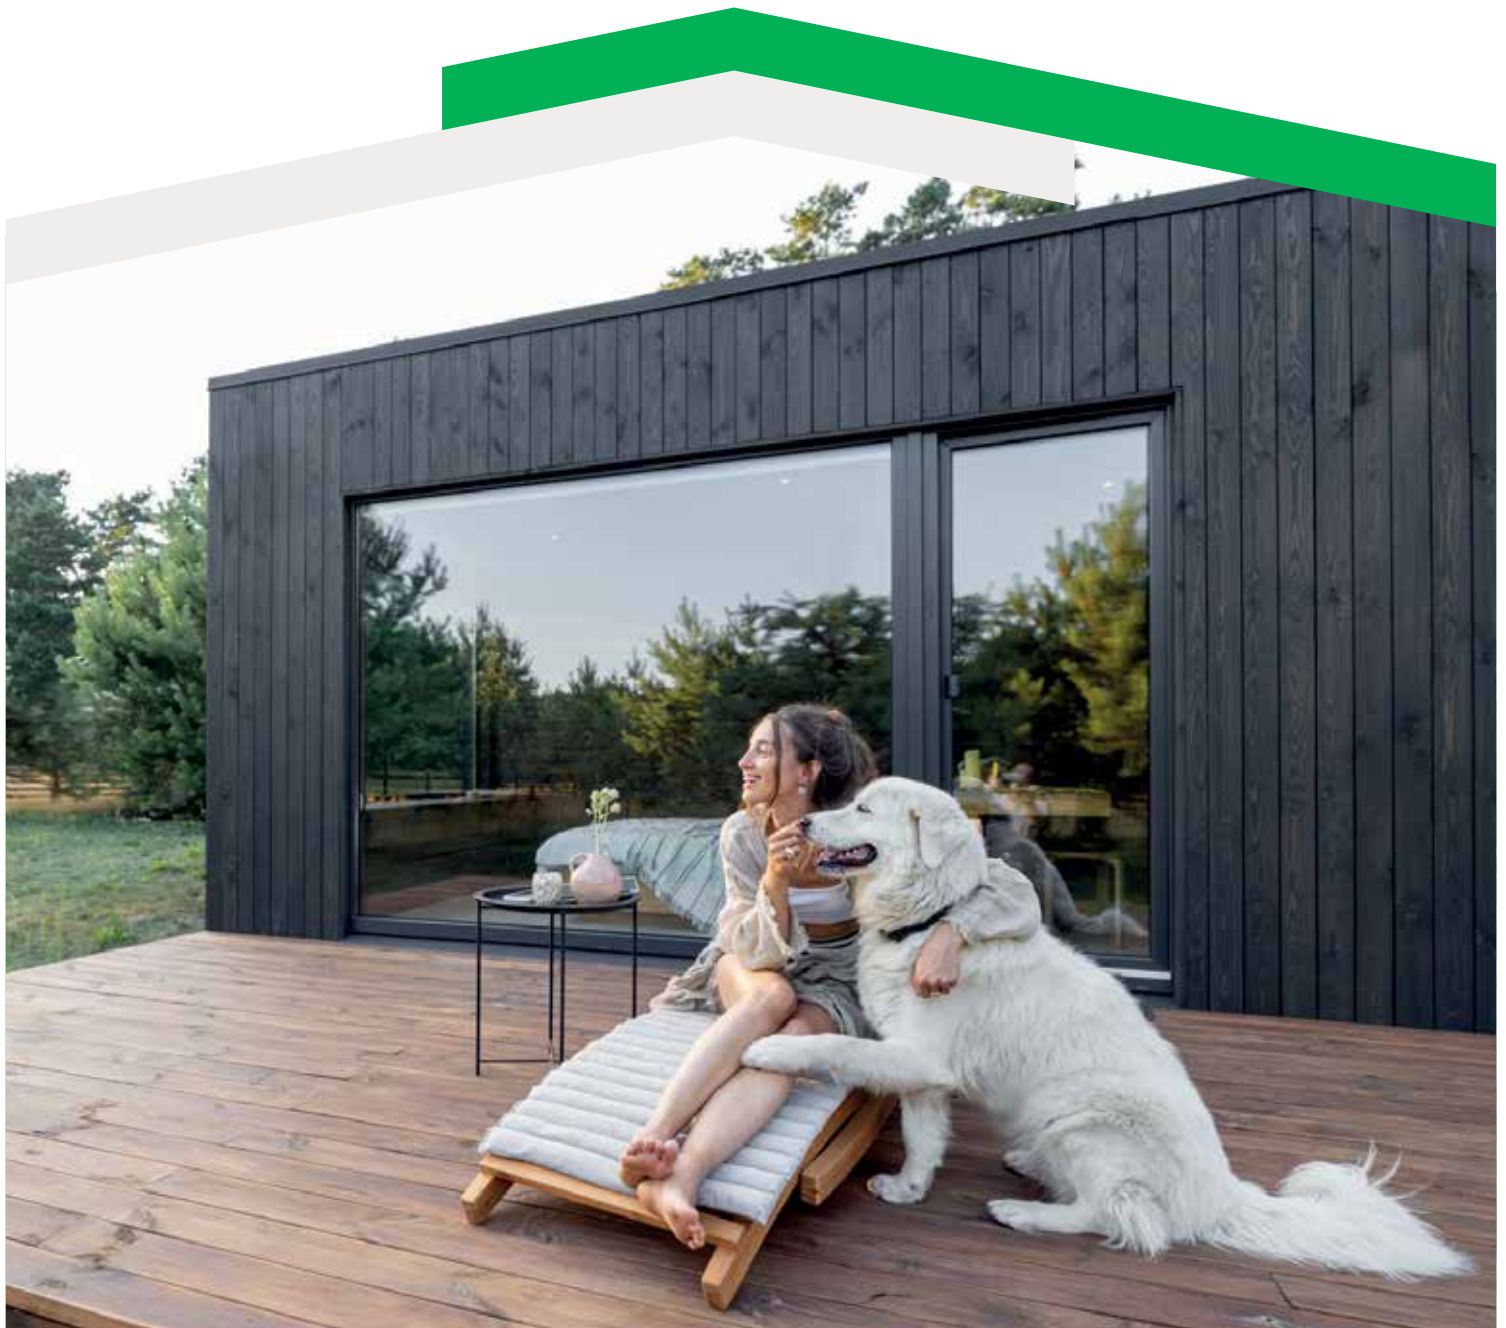

HEMEL®

COLOR PRO

Tinting System: HEMEL Color Pro

HEMEL Color Pro is a modern and compact tinting system that operates with both solvent-based and water-based pigment pastes. It is designed to deliver fast, precise, and consistent color matching for wood and industrial coatings.



Offers thousands of color options.



Minimises stock levels and eliminates slow-moving products through optimized production.



Utilises high-quality pigment pastes with strong UV resistance.



The system, which works with both solvent- and water-based pigment pastes, offers flexibility and a wide product range to dealers.




Modernise your store with the stylish design and innovative technology of HEMEL Color Pro, making your business a go-to destination for premium wood and industrial coatings.

For more information

Visit: www.hemel.com.tr **Call:** 444 98 48

Handwriting practice lines consisting of 28 horizontal dotted lines.

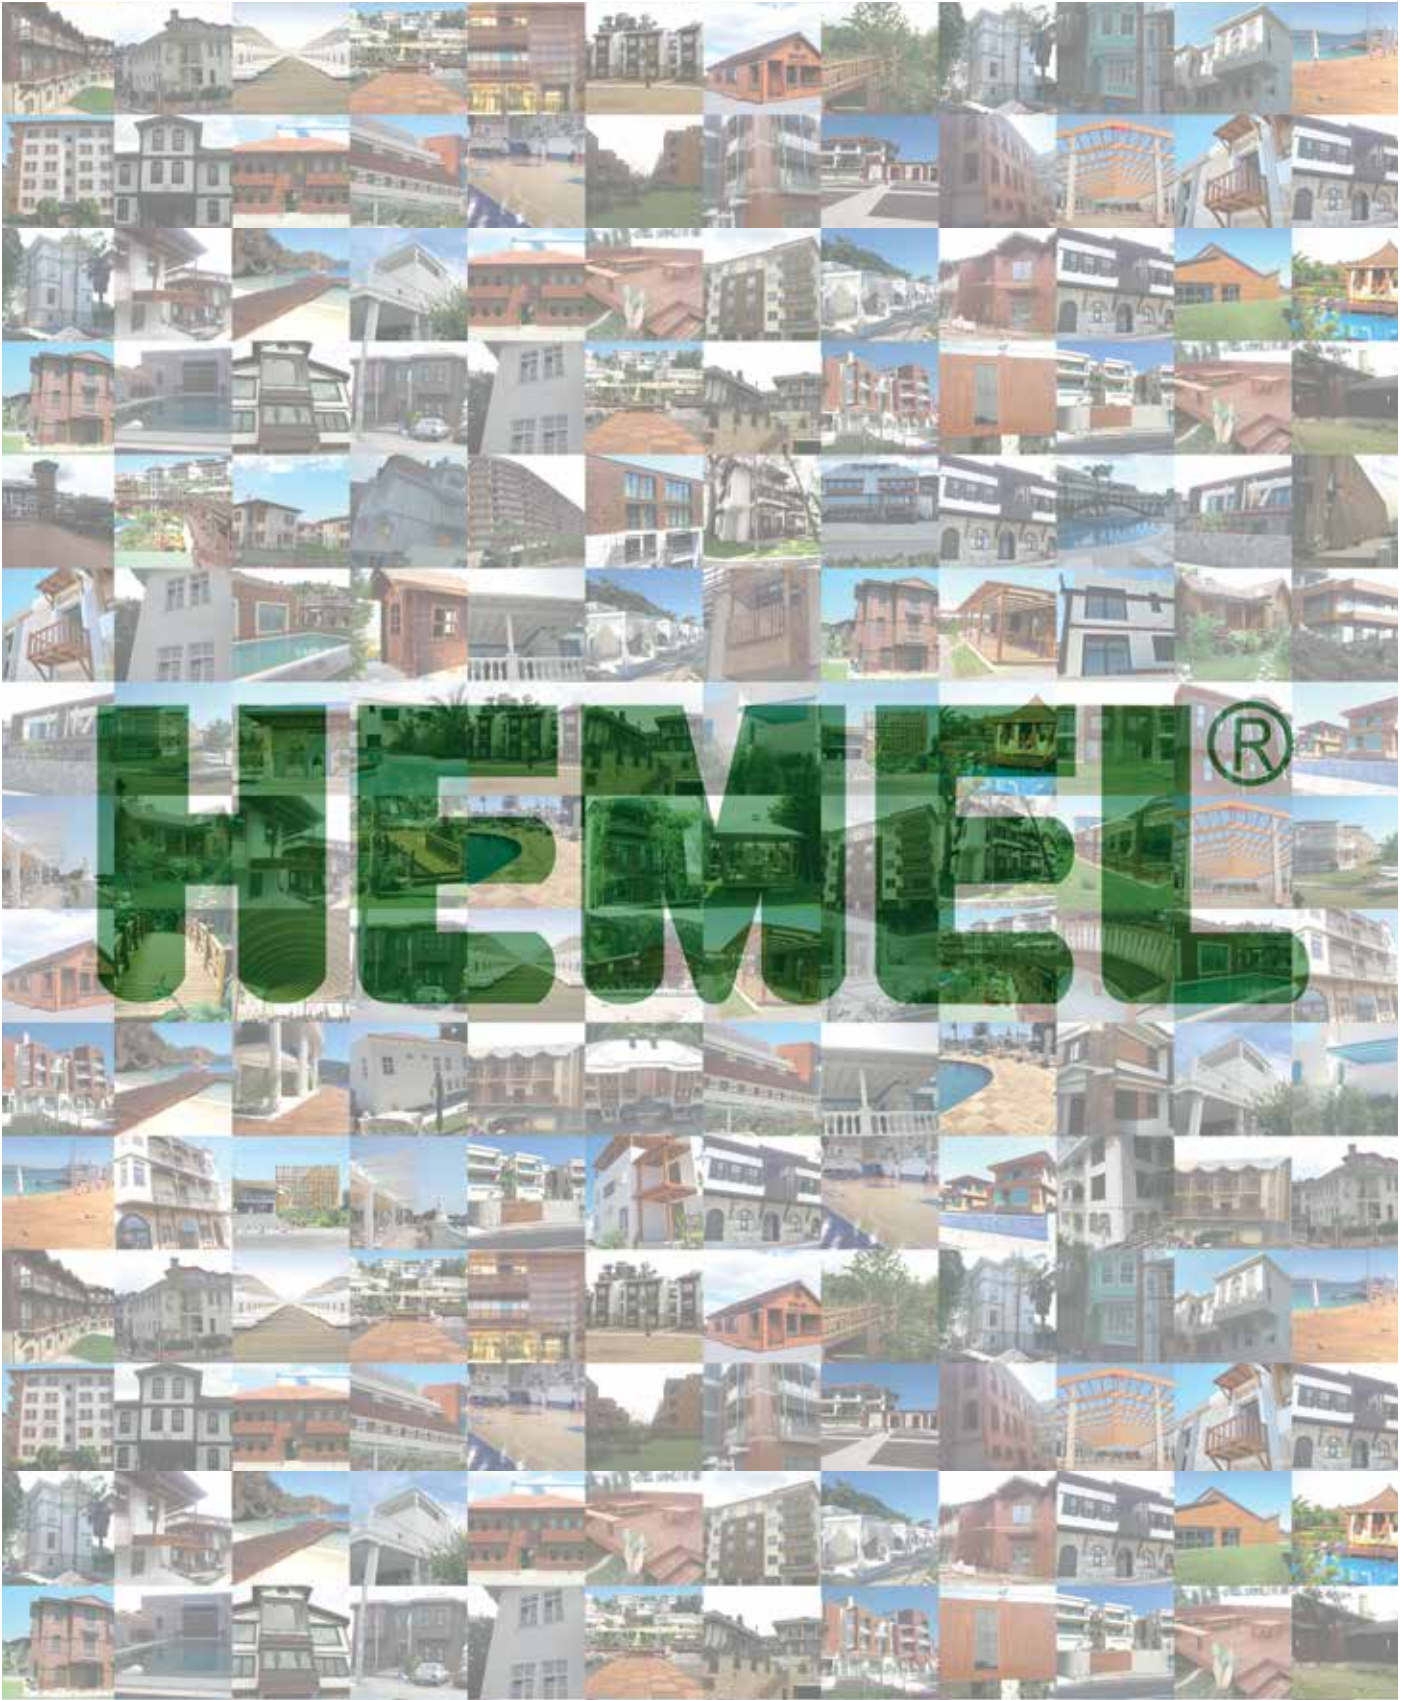

HEMEL®, Ultramat®, Aqua Stone® and Invisible® are registered trademarks of Hemel Boya ve Kimya San. A.Ş.
Tanalith and BARamine are registered trademarks of Arxada Wood Protection.
ThermoWood® is a registered trademark of ThermoWood Association.

HEMEL BOYA VE KİMYA SAN. A.Ş.

Mersis No: 0461 0031 9770 0019

HEMEL®

444 98 48

www.hemel.com.tr

[f](#) [p](#) [t](#) [i](#) /ahsapdustu

REV090420260849_23509