

GOODWE · SOLARGO APP

Wifi Reconnection Guide

Use this guide for GoodWe inverters with a Wi-Fi 2.0 dongle (WiFi Kit-20 or WiFi/LAN Kit-20).

SolarGo app

Bluetooth

STEP-BY-STEP

1 Turn on Bluetooth

START HERE

Open Settings on your phone and switch Bluetooth on.




2 Select your inverter in SolarGo

Open SolarGo. Tap the device starting with WLA or WFA followed by your inverter serial.




3 Tap Pair

Tap Pair when the Bluetooth Pairing Request appears.

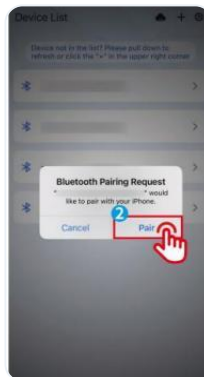


4 Log in (grid-tied only)

On grid-tied inverters, select Owner, enter 1234, tap Login. Hybrid inverters skip this step.

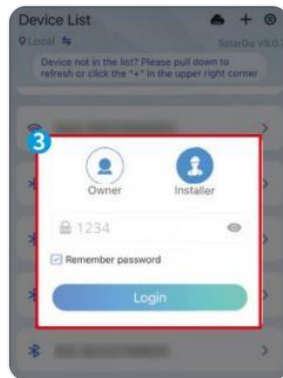


5 Tap More

On the inverter home screen, tap More in the bottom-right.

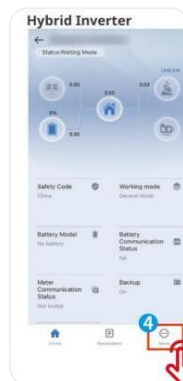


6 Tap Communication Setting

In the More menu, tap Communication Setting.

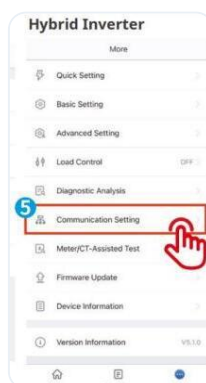

7 Tap Network Setting (hybrid only)

Hybrid inverters: tap Network Setting. Grid-tied: skip to the next step.

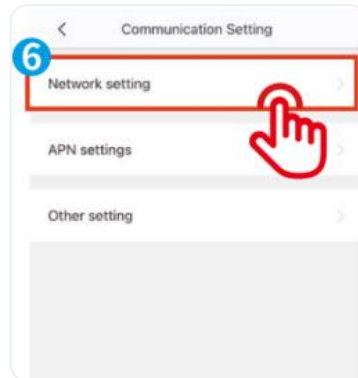

8 Enter WiFi details and Save

Ensure Wi-Fi is on. Select your network, enter the password, leave DHCP on, tap Save.



✓ FINISHED