




2. Specifications

Rated Voltage	277VAC/500VDC
Operating Frequency	0-60Hz
Rated Current	2x63A
Shielding Effectiveness	100dB, 14kHz-40GHz
Climatic Category	25/070/21
Hipot Test	1200VDC, 2 SEC

3. Typical Applications

EMC Anechoic Chambers

4. Installation Diagram

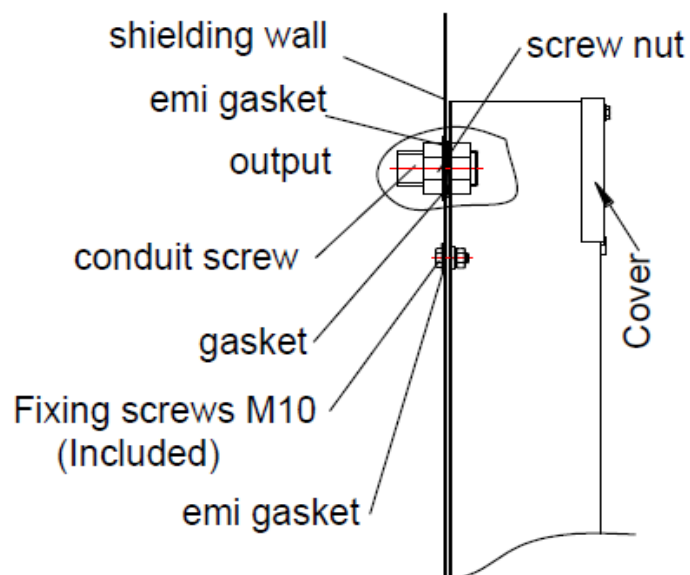



5. Accessories List

- ① M33 Conduit Screw: 1pc
- ② Gasket 33: 1pc
- ③ M33 Screw Nut: 1pc
- ④ EMI Gasket 33: 1pc
- ⑤ Certificate: 1pc
- ⑥ Cable Gland M32: 1pc