

VIBRACAN

RSR-H



SIZE (IN.)	RATED LOAD
4 X 4	800

5/8" HOLE

RUBBER STEEL RUBBER
THICKNESS, 7/8 INCHES

MODEL #: RSR
PRODUCT NAME: RUBBER STEEL RUBBER

***DESCRIPTION:**

*MAXIMUM LOAD: 60 LBS/ INCH SQUARE; DEFLECTION: 0.21 INCH.

*MULTI-LAYERS RIBBED RUBBER PADS SEPARATED BY STEEL PLATE FOR
UNIFORM LOAD DISTRIBUTION.

*NO BOLTING REQUIRED.

*SIMPLE FIELD INSTALLATION.

*MULTI-LAYERS ARE RECOMMENDED WHERE VIBRATION AND NOISE CONTROL IS REQUIRED.

***APPLICATION:**

*PUMPS,


*MOTORS,

*AIR-CONDITIONING UNITS,

*GENERATORS,

*FANS,

*CHILLERS AND COOLING TOWERS.

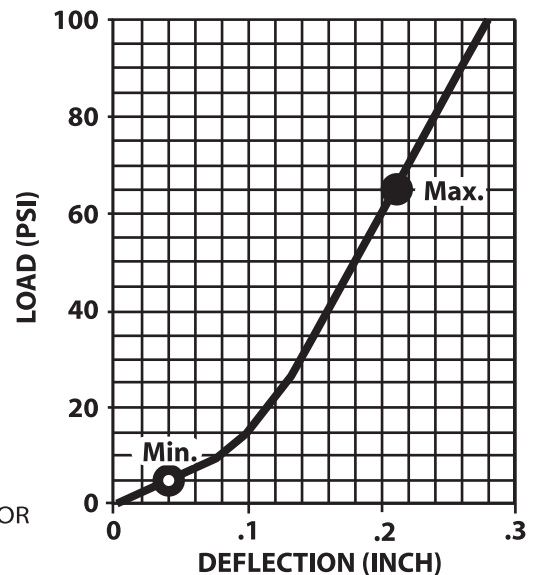

NOTE: *RESEARCH & DEVELOPMENT IS A CONTINUOUS PROCESS WITH US. AS IMPROVEMENTS ARE MADE FROM TIME TO TIME
SPECIFICATIONS & DIMENSIONS MAY CHANGE WITHOUT NOTICE.
*TOLERANCES IN DIMENSIONS ARE AS PER INTERNATIONAL STANDARDS.

VIBRACAN