




U86C4x250

Power Line EMI Filter

1. Dimensions

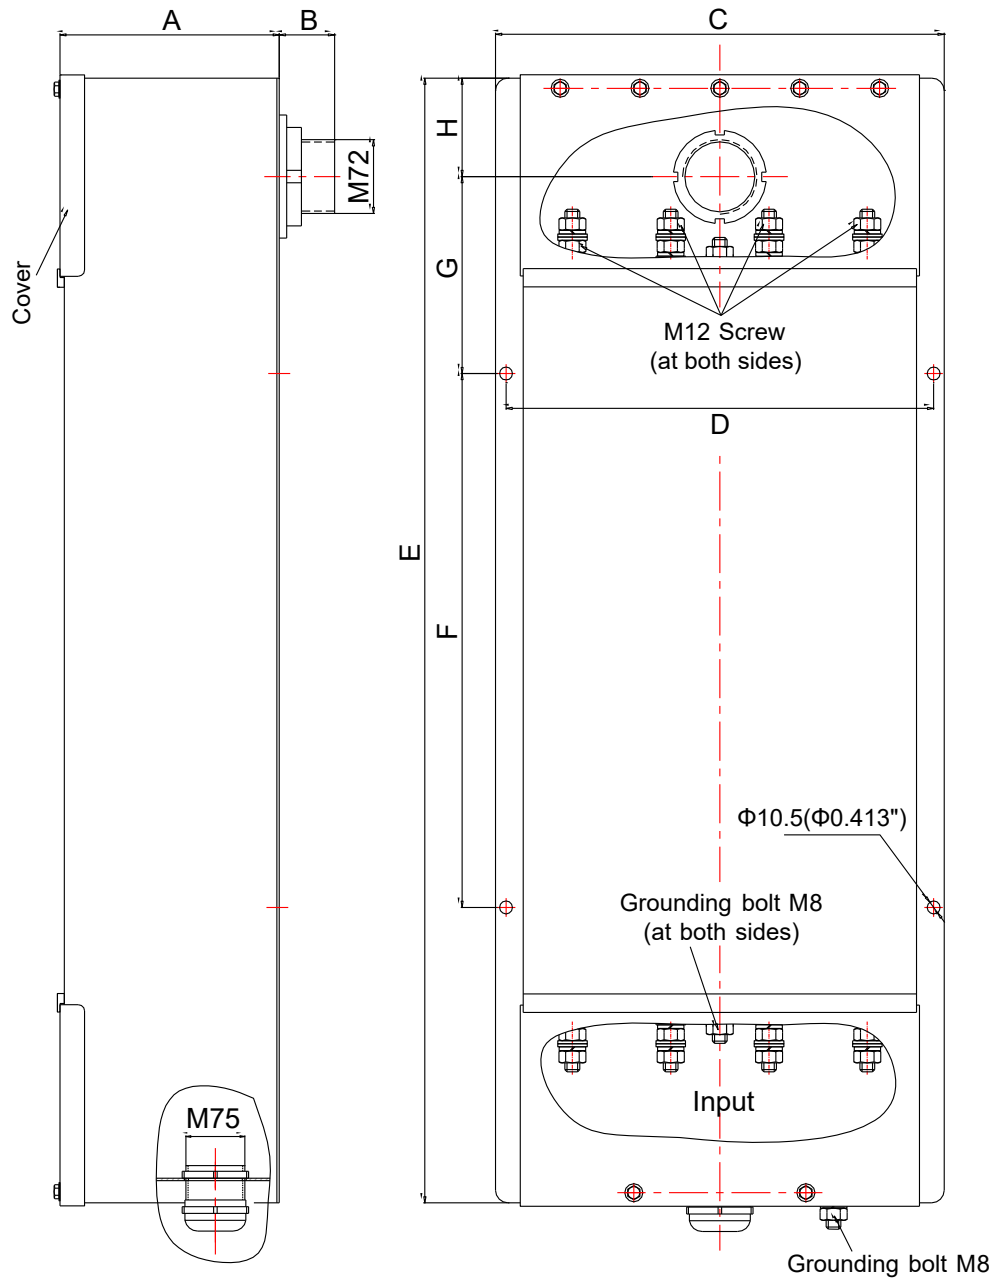

	A	B	C	D	E	F	G	H
mm	155	45	405	388	960	450	205	80
Inch	6.10	1.77	15.94	15.28	37.80	17.72	8.07	3.15


Tolerance: $\pm 0.02\text{in}$ / $\pm 0.5\text{mm}$



2. Specifications

Rated Voltage	480VAC/277VAC
Operating Frequency	0-60Hz
Rated Current	4x250A
Leakage Current	3.1mA (@250VAC,50Hz)
Shielding Effectiveness	100dB, 14kHz-40GHz
Insertion Loss	100dB, 200kHz-40GHz
Climatic Category	25/085/21
Hi-pot Test	1200VDC, 2 SEC

3. Installation Diagram

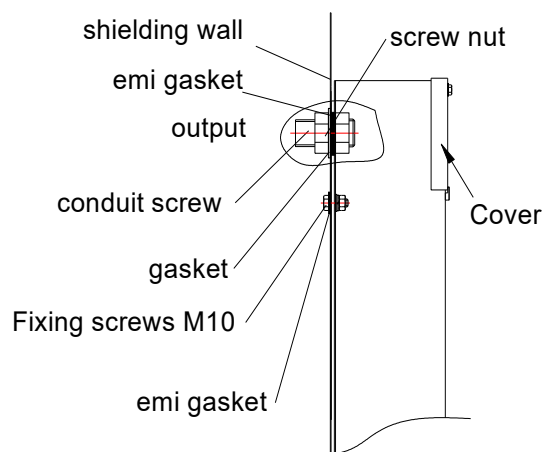

4. Accessories List

- ① M72 Conduit Screw: 1pc
- ② Gasket 72: 1pc
- ③ M72 Screw Nut: 1pc
- ④ Cable Gland M75: 1pc
- ⑤ Certificate: 1pc