KASTURI

DURAflex™ Steel Fibers

Product Data Sheet

HKL HT 65/50 Loose




PRODUCT INFORMATION

Duraflex™ High Tensile Hook End Steel Fiber 65/50 is a steel fiber cold-drawn wire for reinforced concrete. Duraflex™ HT 65 is designed in order to avoid balling issues, and to improve the durability of the concrete. Duraflex™ HT 65 can replace all conventional reinforcing methods for concrete or can be used in combination with them.

HKG HT 65/50 Glued

TECHNICAL INFORMATION

Material	Low Carbon Drawn Wire
Aspect Ratio	65
Length	50 mm
Diameter	0.75 mm
Tensile Strength	>1250 MPa High Tensile Steel Fiber

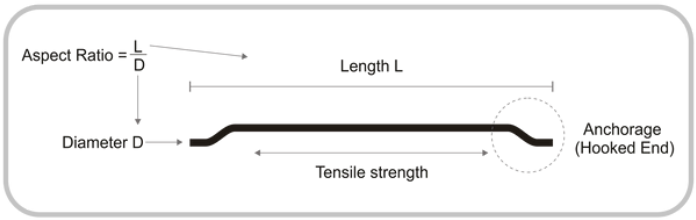

Appearance	Clear, Bright Loose/Glued Fibers with Hook End anchorage
Conforms to	EN 14889-1, ASTM A820 M04 Standards

APPLICATIONS

- Industrial slab and floor
- Commercial floor
- Cast in place concrete
- Precast concrete product

KEY BENEFITS

- Increases load-bearing capacity.
- Control shrinkage cracks.
- Improve durability.
- Reinforce the concrete multi-directionally.
- Reduce construction time.

TÜV SÜD ISO 9001

ISO 9001:2015

MAKE IN INDIA

CE

PACKING

Available in 20kg and 25kg bags

STORAGE

Store in a dry area.

SAFETY

We recommend that gloves and eye protection be used when handling fibre.

We also provide a savings calculation for industrial floors and other steel-fiber concrete elements, we recommend the suitable fiber type and optimal dosing. You can also find more information at: www.steelfiberindia.in

Head Office
KASTURI METAL COMPOSITE LTD
Registered Office: A-30/3/1 ,MIDC
Amravati, Maharashtra, India
Pin : 444605

Mumbai Office
Akshar Business Park, S Wing,
First Floor, Office No. S-1063A,
Janta Market Road, Sector-25,
Vashi, Navi Mumbai-400703.