

DATE

PROJECT

LOCATION


TYPE



PRODUCT FEATURES

- Light module tiltable $\pm 30^{\circ}$ (left/right)
- Super slim design(8mm)
- Various length available
- Miniature lighting for furniture, showcase, museum
- Dimmable
- Surface, Recessed type available
- Lens, Diffused type available


DIMENSIONS

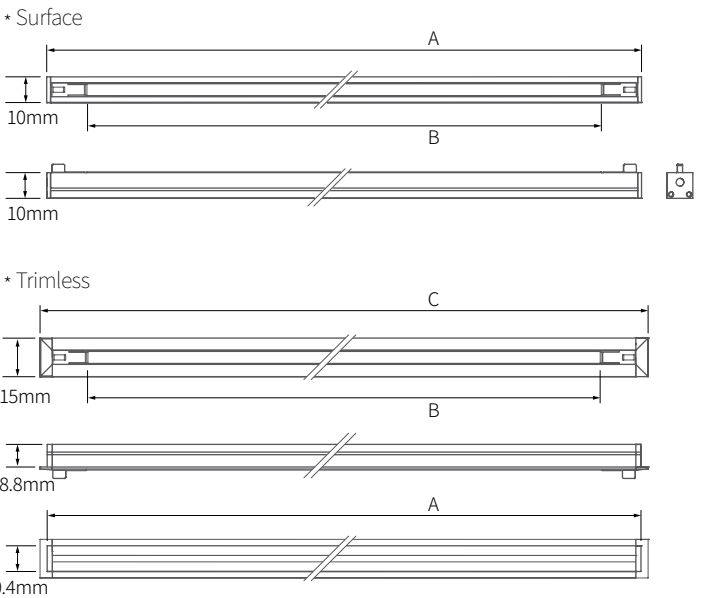


SPECIFICATION

Model number	Voltage Input (V)	Power Input (W)	Luminous Flux (lm)	Luminous Efficacy(lm/W)	Color Rendering	A(mm)	B(mm)	C(mm)
EGL4-(Color)K-24V-C90	DC 24V	3.37 W	234 lm	69.57 lm/W	Ra>90	231 mm	200 mm	237.5 mm
EGL7-(Color)K-24V-C90		6.98 W	479 lm			531 mm	500 mm	537.5 mm
EGL11-(Color)K-24V-C90		10.7 W	744 lm			831 mm	800 mm	837.5 mm
EGL14-(Color)K-24V-C90		13.75 W	956 lm			1131 mm	1100 mm	1137.5 mm
EGL4-(Color)K-24V-C90-R		3.37 W	234 lm			231 mm	200 mm	237.5 mm
EGL7-(Color)K-24V-C90-R		6.98 W	479 lm			531 mm	500 mm	537.5 mm
EGL11-(Color)K-24V-C90-R		10.7 W	744 lm			831 mm	800 mm	837.5 mm
EGL14-(Color)K-24V-C90-R		13.75 W	956 lm			1131 mm	1100 mm	1137.5 mm


OPTIONS

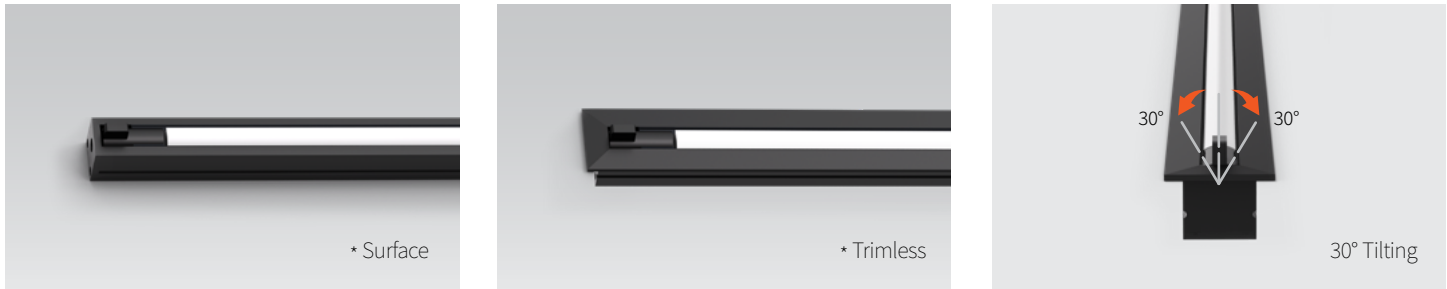


INSTALLATION

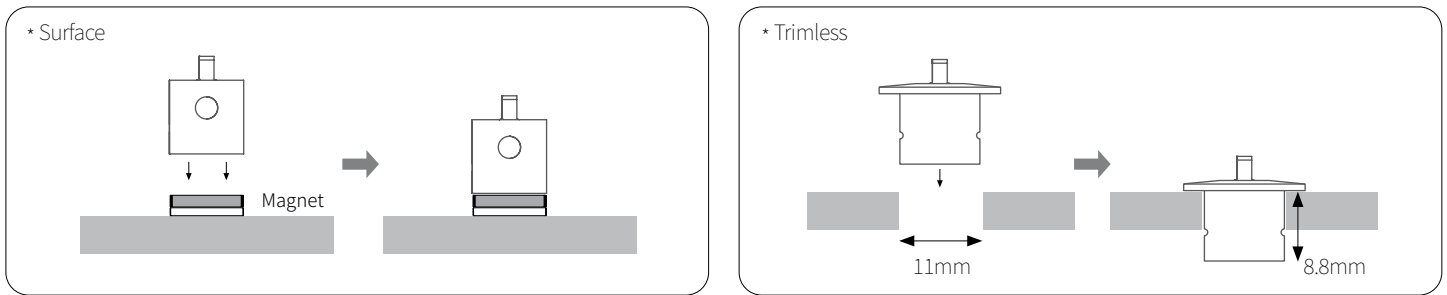

LED DRIVER OPTIONS

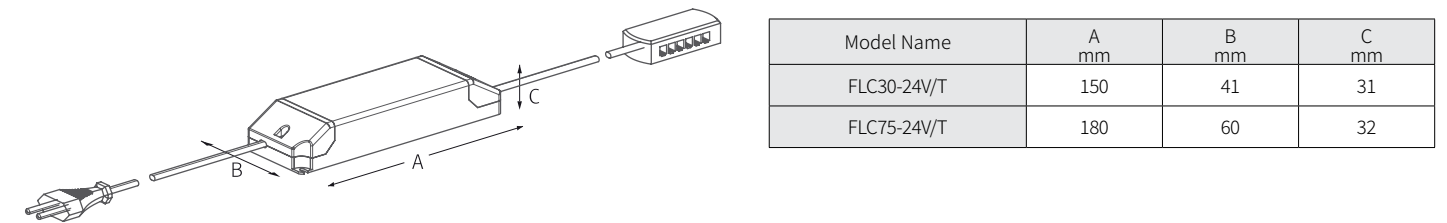

BEAM SPREADS

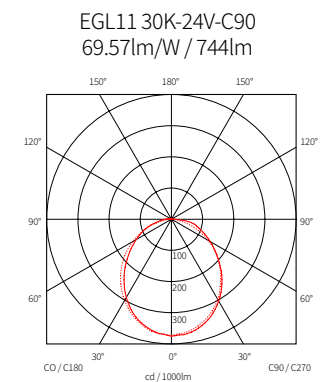

COMPONENTS



12 Port Hub

__12 Way distributor
Included with Cord and Plug drivers.
Order separately for 3rd Party Drivers



LED Drivers

__FLC30-24V/T (30W)
__FLC75-24V/T (75W)
with distributor and power cord
(1,800mm)



LED Driver

__FLC200-24V/T (200W)
with 12way distributor




Door and motion sensor

__FLS-M24V



Occupancy sensor

__FLS-P24V



Dimming Interface (0-10V/1-10V)

__FDC-L10 (Max. 100W)



Dimming Interface (0-10V/1-10V)

__FDD-L20



Dimming Interface

__FDA-L2MO (0-10V/1-10V, DMX512)
Max. 200W (100W/CH, 2CH)
__FDA-L5M (DMX512)
Max. 200W (50W/CH, 5CH)



Dimming Interface (Dail)

__FDD-L1DA
Max. 200W (100W/CH, 1CH)



Dimming Interface (Zigbee)

__FDD-L2Z



Dimming Interface (CASAMBI, Bluetooth)

__FDD-L2B(Max, 200W)



Wireless Control (Zigbee Switch)

__FSM-Z1