




U82C4x250

Power Line EMI Filter

1. Dimensions

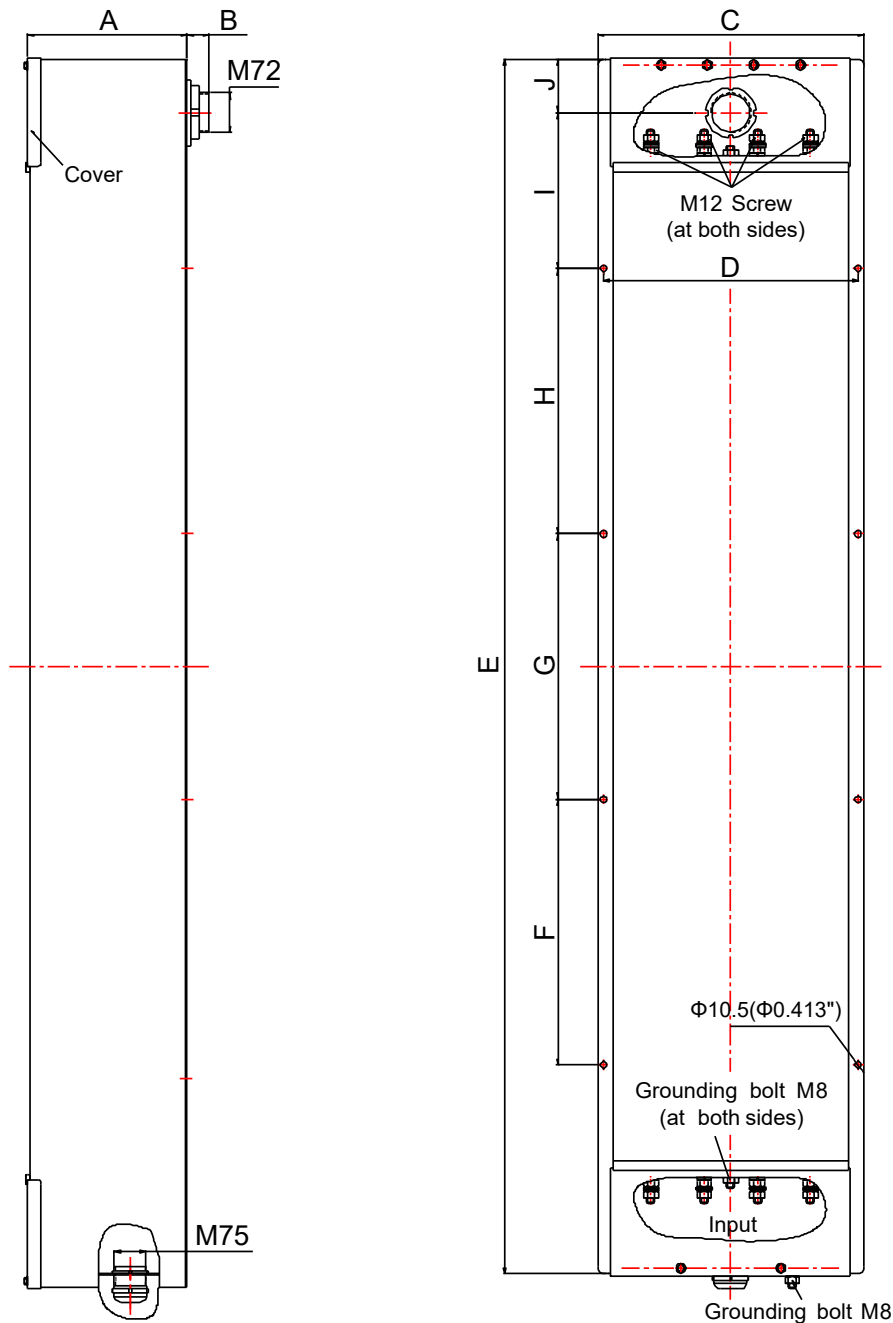

	A	B	C	D	E	F	G	H	I	J
mm	240	45	400	383	1830	400	400	400	235	80
Inch	9.45	1.77	15.75	15.08	72.05	15.75	15.75	15.75	9.25	3.15


Tolerance: $\pm 0.02\text{in}$ / $\pm 0.5\text{mm}$



2. Specifications

Rated Voltage	480VAC/277VAC
Operating Frequency	0-60Hz
Rated Current	4x250A
Leakage Current	2.9A (@250VAC,50Hz)
Insertion Loss	100dB, 14kHz-40GHz
Shielding Effectiveness	100dB, 14kHz-40GHz
Climatic Category	25/085/21

3. Typical Insertion Loss Performance Curve (acc. to MIL-STD-220)

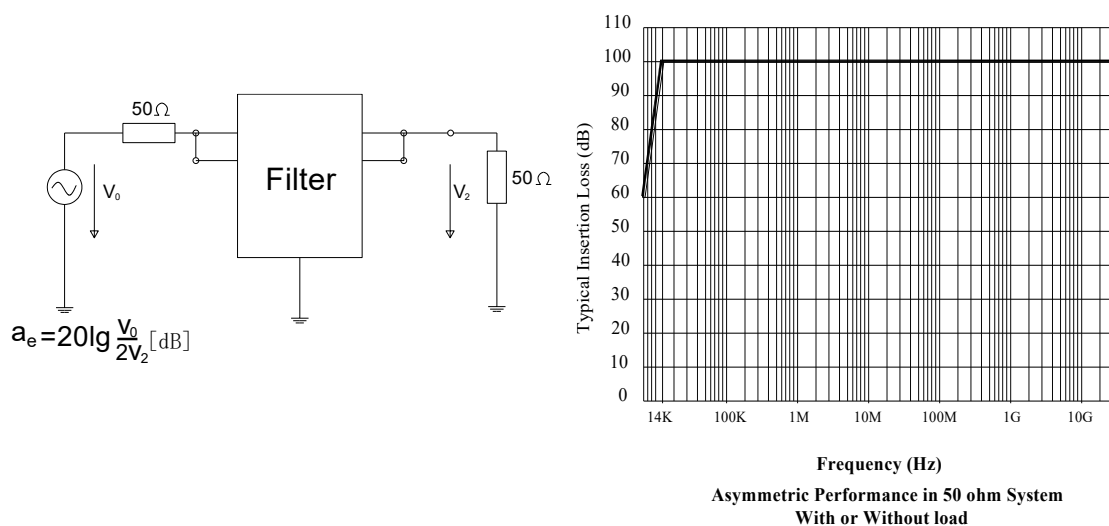

4. Accessories List

- ① M72 Conduit Screw: 1pc
- ② Gasket 72: 1pc
- ③ M72Screw Nut: 1pc
- ④ Cable Gland M75: 1pc
- ⑤ Certificate: 1pc



5. Installation Diagram

