




U05A2x30

Power Line EMI Filter

1. Dimensions (mm)

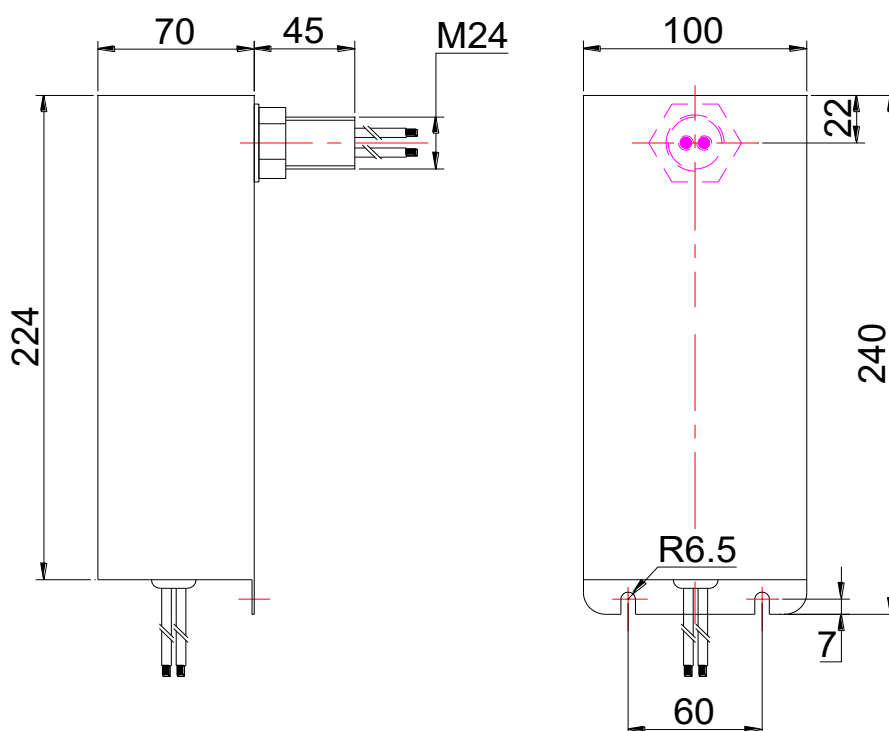


2. Specifications

Rated Voltage	250VAC/250VDC
Operating Frequency	0-60Hz
Rated Current	2x30A
Leakage Current	15.7mA @ 250VAC, 50Hz
Shielding Effectiveness	100dB, 14kHz-40GHz
Insertion Loss	100dB, 10MHz-40GHz
Climatic Category	25/085/21
Hipot Test	1200VDC, 2 SEC
Weight	5.5lbs (2.5kg)



3. Installation Diagram

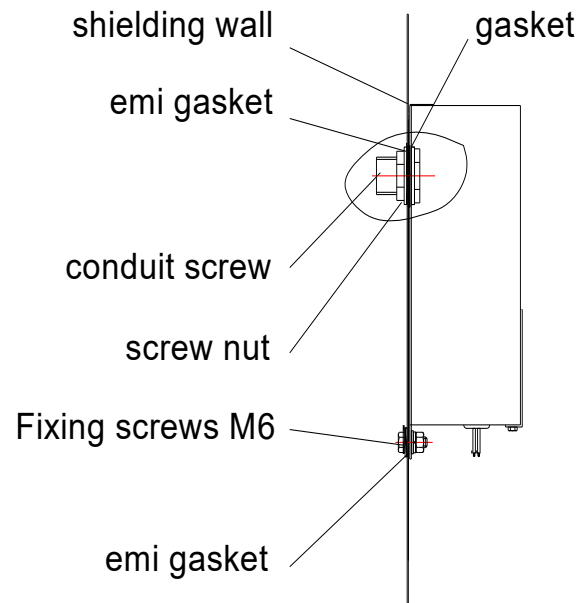

4. Assembly Parts:

- ① M24 Conduit Screw: 1pc
- ② Gasket 24: pc
- ③ M24 Screw Nut: 2pc
- ④ EMI Gasket 24: 1pc
- ⑤ Certificate: 1pc