



CR-7007GS

LED EXIT LIGHT

INTRODUCTION

The FGE-CR-7007GS Series LED Exit Light is designed for emergency evacuation and safety indication in commercial buildings, offices, hospitals, schools, and public facilities. Featuring high-brightness, energy-efficient LED light sources, it ensures clear visibility of exit directions even in low-light or power-outage conditions.

The fixture is built with a durable flame-retardant housing and offers long-life lithium battery backup, providing 90 minutes of emergency illumination during power failure. Its modern, slim design blends seamlessly with various interior styles, supporting wall, end and ceiling mounting installations.

Reliable, low-maintenance, and compliant with safety standards, the CR-7007GS delivers stable performance and dependable guidance for safe evacuation in any emergency situation.



FEATURES



Charge Time: 24 hours

Fully charges in 24 hours for dependable emergency readiness.



3.6V 300mAH Battery

Equipped with a 3.6V 300mAh battery for reliable emergency lighting during power outages.



Discharge Time: 90 minutes

Provides up to 90 minutes of continuous illumination during power failure.



RELIABLE
WARRANTY

Reliable Warranty

2 Years Warranty.

- Versatile Mounting Options:

Wall, end and ceiling mounting for flexible installation.

- Input Voltage:

AC 110V or 220V.

- Universal field-selectable single or double faces

Allows easy configuration on-site to switch between single-face or double-face display, providing installation flexibility for various emergency exit layouts.


- Maintenance free

Designed with long-life components that minimize service needs, ensuring reliable performance without frequent inspections or replacements.

- High impact, flame resistant, UV resistant

Constructed with robust housing that withstands strong impacts, resists flame spread, and protects against UV degradation for long-term durability.

APPLICATIONS

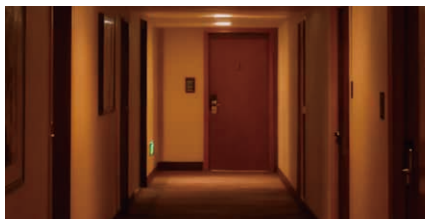

Hotel: Providing reliable backup illumination for corridors, guest rooms, and public areas to ensure safe evacuation during power outages.



Factory: Delivering durable emergency lighting for production lines and hazardous areas, maintaining visibility and worker safety during unexpected outages.



School: Ensuring safe guidance lighting in classrooms, hallways, and auditoriums to support orderly evacuation during emergencies.



Hospital: Supporting critical areas such as wards, operating rooms, and corridors with uninterrupted emergency lighting to safeguard patients and staff.



Mall: Offering effective emergency illumination for large retail spaces and evacuation paths to maintain order when the main power fails.




Station: Delivering high-visibility emergency lighting for platforms, ticket halls, and transit corridors to support safe movement during power loss.

TECHNICAL PARAMETERS

Product Model	CR-7007GS
Electrical Performance	
Wattage	1.2W
Input Voltage	110V or 220V
Frequency	50/60Hz
Reliability	
Operating Temperature	0 ~ +40°C
Ingress Protection	IP20
Mechanical	
Housing Material	Injection-molded plastic ABS housing
Net Weight	0.9kg
Dimensions	299x184.5x44.6mm
Warranty	2 Years

MECHANICAL DIMENSIONS

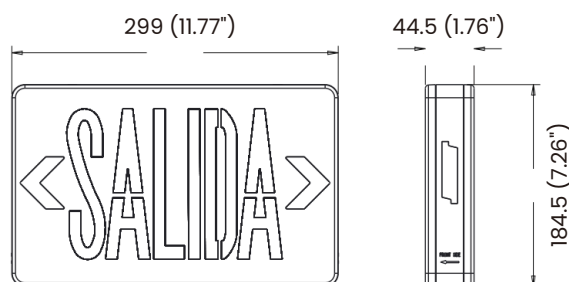


1.2W

Product Model	CR-7007GS
Wattage	1.2W
Outer box (L*W*H)	390x318x385mm (15.35"x12.52"x15.16")
Q'ty/Ctn	12pcs
N.W./Ctn	10.00kg/22.05lbs
G.W./Ctn	11.50kg/25.35lbs
Remarks	-

INSTALLATION

1. Connect the AC cable for power charging.
2. The power indicator will be red during AC charging.
3. How to test---Light will work automatically when push test button during AC charging.
4. Light will work automatically when power failure.

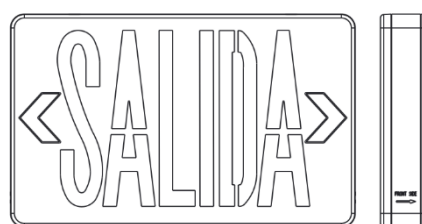

ORDER INFORMATION

CR-7007GS-YY-YY-YY

① ② ③ ④ ⑤ ⑥ ⑦

① CR-7007GS Series LED Exit Light

② Wattage

1.2W	1.2W
------	------

③ Remote Head

(Blank)	No Remote Heads
---------	-----------------

④ Voltage

(Blank)	110V
---------	------

⑤ Letter Colors

G	Green
R	Red

⑥ Housing Colors

(Blank)	White
---------	-------

⑦ Face Options

(Blank)	Universal
---------	-----------



WARRANTY PERIOD
**2 YEARS
WARRANTY**



WARRANTY COVERAGE
**LED LIGHT SOURCE,
DRIVER**



AFTER-SALES
SERVICE COMMITMENT
24H RESPONSE



AFTER-SALES
SERVICE COMMITMENT
72H RESOLUTION/REPLACEMENT