



**CHANAKYA
GROUP**

"Light Up Your World"



- LED STREET LIGHT
- LED HIGH BAY LIGHTS
- LED FLOOD LIGHT
- OUTDOOR LIGHT



24 W LENSE MODEL STREET LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor (Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Pipe I.D.	: 40mm
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand

36 W LENSE MODEL STREET LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor (Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Pipe I.D.	: 43mm
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand



50W LENSE MODEL STREET LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor (Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Pipe I.D.	: 45mm
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand

72 W LENSE MODEL STREET LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Pipe I.D.	: 45mm
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand

100 W LENSE MODEL STREET LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Pipe I.D.	: 52mm
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand



24/36/50W AURA LENSE MODEL STREET LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Pipe I.D.	: 100mm
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand

24W GLASS MODEL STREET LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Pipe I.D.	: 42mm
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand

36W GLASS MODEL STREET LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Pipe I.D.	: 42mm
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand



50/72W GLASS MODEL STREET LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Pipe I.D.	: 45mm
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand

100/150/200W GLASS MODEL STREET LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor (Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Pipe I.D.	: 54mm
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand

50W RGB FLOOD LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: RGB
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor (Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand



100W RGB FLOOD LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: RGB
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor (Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand

30W FLOOD LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand

50W FLOOD LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand



100W FLOOD LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand

150W FLOOD LIGHT




Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand

200W FLOOD LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand




150/200/300W FLOOD LIGHT

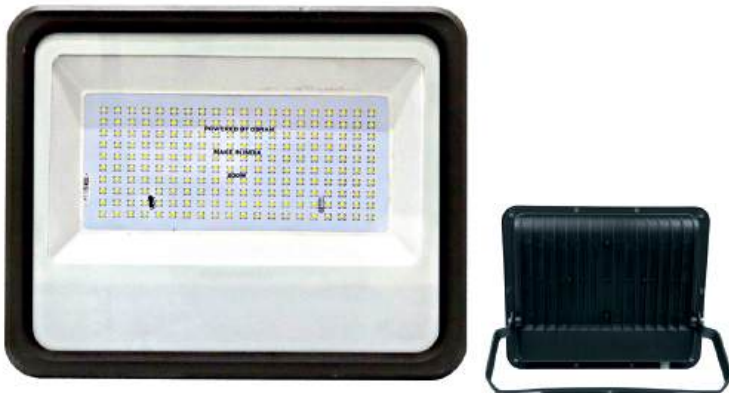

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand


50W FLOOD LIGHT

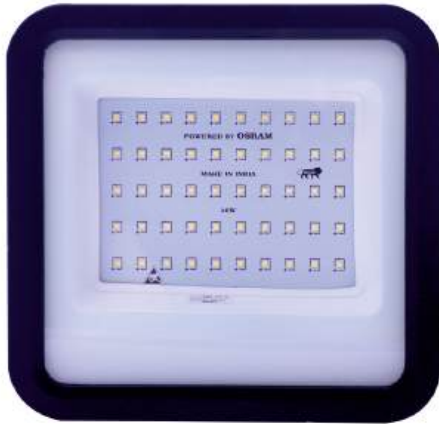

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand

100W FLOOD LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand

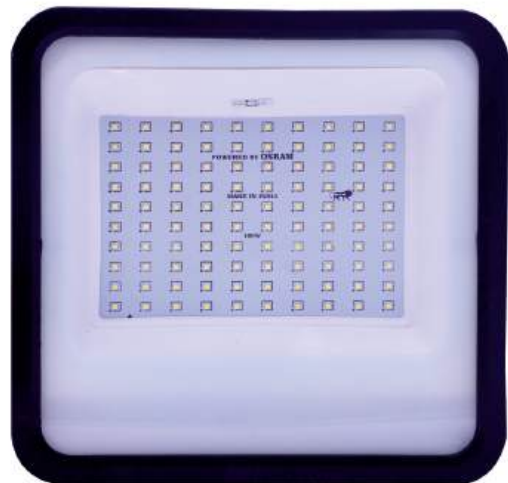

150/200W FLOOD LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand

50W FLOOD LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand

100W FLOOD LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand



150W FLOOD LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand






**CHANAKYA
GROUP**
"Light Up Your World"

FLOOD LIGHT

200W FLOOD LIGHT

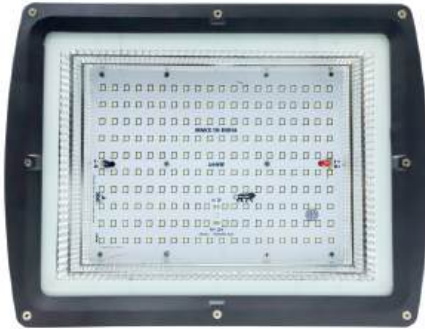

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand

300W FLOOD LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand



400W FLOOD LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTc
Warranty	: 2 Years on Demand



50W LENS FLOOD LIGHT



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor (Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand

100W LENS FLOOD LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor (Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand



150/200W FLOOD LIGHT

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor (Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand





**CHANAKYA
GROUP**
"Light Up Your World"

HIGHBAY LIGHT

50/100W Highbay Light



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand

150W Highbay Light

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand



200W Highbay Light



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand

100W Highbay LANS Light



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand

150/200W Highbay Light

Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand



200/300W Back Choke Flood Light



Working Volt Range	: 85-300 Vac @ 50HZ
Power Factor	: ≥ 0.97
CRI	: ≥ 75
CCT	: 3000-6500K
Beam Angle	: 130
Surge Protection	: 4Kv-6Kv
THD	: ≥ 10
External Spd	: 10Kv (On Demand)
Sensor(Day Light, Dusk to Down)	: On Demand Available
Driver	: IP 66, Isolated
Driver Protection	: IVP, OVP, OTP
Material	: Aluminium
LED	: OSRAM, BRIDGELUX, BMTC
Warranty	: 2 Years on Demand



We, at LED Lights Company, take pride in lighting up the world with creativity, innovation, and passion. Whether you are looking for a bright and vibrant solution or a subtle one, we have the perfect lighting solution for you with our products that are designed to be durable and energy-efficient as well as provide the most aesthetically pleasing lighting solutions available. The options we offer range from simple plug-in-play lighting fixtures to highly sophisticated smart lighting systems. We are committed to providing you with a custom solution that will brighten up your life for years to come. Whether it's a small project or a large one, we are here to help you design a lighting solution that meets the needs of your project. Thank you for choosing us to light up your world!



Attibele Industrial Area, Bangalore-07

sales@chanakyagroup.org

www.chanakyagroup.org

