

Engineered to Filter, Built to Protect.

U05A2x30

LISTED

Power Line EMI Filter

1. Dimensions (mm)

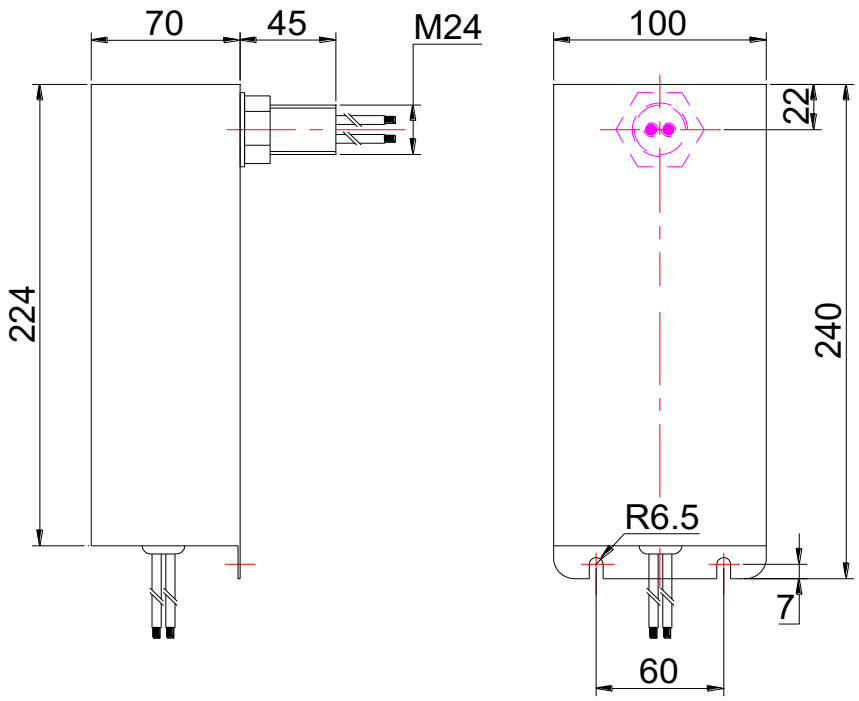

2. Specifications

Rated Voltage	250VAC/250VDC
Operating Frequency	0-60Hz
Rated Current	2x30A
Leakage Current	15.7mA @ 250VAC, 50Hz
Shielding Effectiveness	100dB, 14kHz-40GHz
Insertion Loss	100dB, 10MHz-40GHz
Climatic Category	25/085/21
Hipot Test	1200VDC, 2 SEC
Weight	5.5lbs (2.5kg)



Engineered to Filter, Built to Protect.

3. Installation Diagram

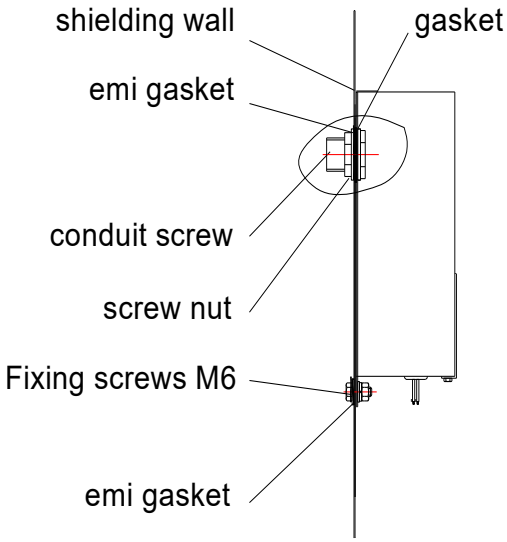

4. Assembly Parts：

① M24 Conduit Screw: 1pc

② Gasket 24: 1pc

③ M24 Screw Nut: 2pc

④ EMI Gasket 24: 1pc

⑤ Certificate: 1pc