

◀EXIT▶



CR-7037G

LED EXIT LIGHT

INTRODUCTION

The FGE-CR-7037G Series LED Exit Sign is designed for emergency evacuation and safety indication in commercial buildings, offices, hospitals, schools and other public facilities. Equipped with long-life, high-brightness energy-saving LEDs, it keeps exit directions clearly visible under low-light environments or power failures.

This exit fixture uses UL94-V0 flame-retardant ABS housing and a maintenance-free NiCad backup battery for 90 minutes of emergency lighting. Its slim design fits most interiors, with wall/end/ceiling mounting, field-selectable single/double-sided display and damp-location approval.

Reliable and low-maintenance, the CR-7037G meets UL 924, CEC Title 20, NFPA 101 Life Safety Code, NEC and OSHA standards. Powered by 120/277VAC 60Hz input, it requires a 24-hour full charge and operates stably from 0°C to 40°C, providing trustworthy escape guidance for all emergency scenarios.



FEATURES



Charge Time: 24 hours

Fully charges in 24 hours for dependable emergency readiness.



1.2V 1000mAH Battery

Equipped with a 1.2V 100mAh battery for reliable emergency lighting during power outages.



Discharge Time: 90 minutes

Provides up to 90 minutes of continuous illumination during power failure.



RELIABLE
WARRANTY

Reliable Warranty

2 Years Warranty.

- Versatile Mounting Options:

Wall, end and ceiling mounting for flexible installation.

- Input Voltage:

AC 120/277V.

- Universal field-selectable single or double faces

Allows easy configuration on-site to switch between single-face or double-face display, providing installation flexibility for various emergency exit layouts.


- Maintenance free

Designed with long-life components that minimize service needs, ensuring reliable performance without frequent inspections or replacements.

- High impact, flame resistant, UV resistant

Constructed with robust housing that withstands strong impacts, resists flame spread, and protects against UV degradation for long-term durability.

APPLICATIONS

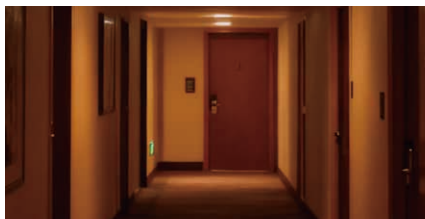

Hotel: Providing reliable backup illumination for corridors, guest rooms, and public areas to ensure safe evacuation during power outages.



Factory: Delivering durable emergency lighting for production lines and hazardous areas, maintaining visibility and worker safety during unexpected outages.



School: Ensuring safe guidance lighting in classrooms, hallways, and auditoriums to support orderly evacuation during emergencies.



Hospital: Supporting critical areas such as wards, operating rooms, and corridors with uninterrupted emergency lighting to safeguard patients and staff.



Mall: Offering effective emergency illumination for large retail spaces and evacuation paths to maintain order when the main power fails.




Station: Delivering high-visibility emergency lighting for platforms, ticket halls, and transit corridors to support safe movement during power loss.

TECHNICAL PARAMETERS

Product Model	CR-7037G
Electrical Performance	
Wattage	1.2W
Input Voltage	120/277V
Frequency	60Hz
Reliability	
Operating Temperature	0 ~ +40°C
Ingress Protection	IP20
Mechanical	
Housing Material	Injection-molded plastic ABS housing
Net Weight	0.9kg
Dimensions	295x184.2x44.5mm
Warranty	2 Years

MECHANICAL DIMENSIONS

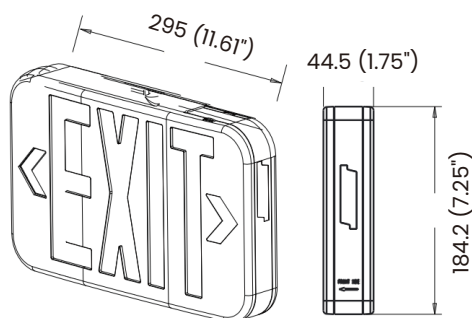

1.2W

Product Model	CR-7037G
Wattage	1.2W
Outer box (L*W*H)	390x315x385mm (15.35"x12.40"x15.16")
Q'ty/Ctn	12pcs
N.W./Ctn	10.60kg/23.37lbs
G.W./Ctn	11.10kg/24.47lbs
Remarks	-

INSTALLATION

1. Connect the AC cable for power charging.
2. The power indicator will be red during AC charging.
3. How to test---Light will work automatically when push test button during AC charging.
4. Light will work automatically when power failure.



ORDER INFORMATION

CR-7037G-YY-YY-YY

① ② ③ ④ ⑤ ⑥ ⑦

① CR-7037G Series LED Exit Light

② Wattage

1.2W	1.2W
------	------

③ Remote Head

(Blank)	No Remote Heads
---------	-----------------

④ Voltage

(Blank)	120/277V
---------	----------

⑤ Letter Colors

(Blank)	Green
---------	-------

⑥ Housing Colors

(Blank)	White
---------	-------

⑦ Face Options

(Blank)	Universal
---------	-----------



WARRANTY PERIOD
**2 YEARS
WARRANTY**



WARRANTY COVERAGE
**LED LIGHT SOURCE,
DRIVER**



AFTER-SALES
SERVICE COMMITMENT
24H RESPONSE



AFTER-SALES
SERVICE COMMITMENT
72H RESOLUTION/REPLACEMENT