
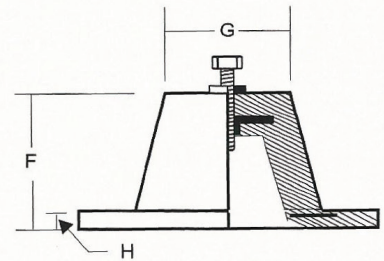
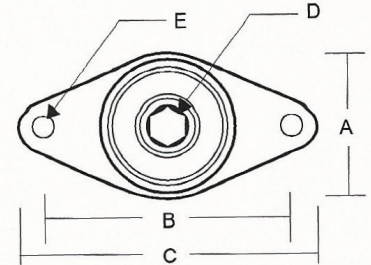


VIBRACAN

RUBBER FLOOR MOUNTS

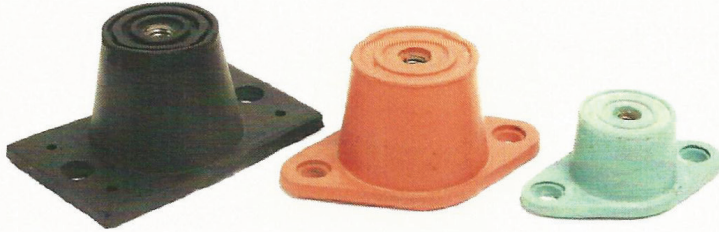

PRODUCT FEATURES

Suitable for mounting on floor
 Ribbed / Non skid design used for providing grip with the surface
 But it is recommended to fasten the product for better results
 Steel re-enforced Rubber for better strength
 Threading provided at top for fastening
 Material : EDPM Neoprene
 RMD3 & RMD4 are rectangle base type

DIMENSIONS IN MM

Model No.	Rated load (lbs)	Rated load (kgs)	Deflection (inches)	Color code of spring	A	B	C	D	E	F	G	H
RMD1 33	33	15	0.32	BLUE	45	50	80	6	8.5	32	35	5
RMD1 44	44	20	0.32	RED	45	50	80	6	8.5	32	35	5
RMD1 66	66	30	0.32	GREEN	45	50	80	6	8.5	32	35	5
RMD1 110	110	50	0.32	BLACK	45	50	80	6	8.5	32	35	5
RMD2 130	130	60	0.40	BLUE	60	76	98	10	8.5	45	45	5.5
RMD2 165	165	75	0.40	RED	60	76	98	10	8.5	45	45	5.5
RMD2 220	220	100	0.40	GREEN	60	76	98	10	8.5	45	45	5.5
RMD2 385	385	175	0.40	BLACK	60	76	98	10	8.5	45	45	5.5
RMD3 200	200	90	0.47	BLUE	60	80	102	10	12	50	45	6.5
RMD3 275	275	125	0.47	RED	60	80	102	10	12	50	45	6.5
RMD3 385	385	175	0.47	GREEN	60	80	102	10	12	50	45	6.5
RMD3 500	500	225	0.47	BLACK	60	80	102	10	12	50	45	6.5
RMD4 770	770	350	0.47	BLUE	92	120	150	12	14	90	70	10
RMD4 990	990	450	0.47	RED	92	120	150	12	14	90	70	10
RMD4 1320	1320	600	0.47	GREEN	92	120	150	12	14	90	70	10
RMD4 2200	2200	1000	0.47	BLACK	92	120	150	12	14	90	70	10

APPLICATION

Used for wide range of HVAC equipments such as compressors, air handling units, fans, pumps and chillers, etc.

NOTE: *RESEARCH & DEVELOPMENT IS A CONTINUOUS PROCESS WITH US. AS IMPROVEMENTS ARE MADE FROM TIME TO TIME SPECIFICATIONS # DIMENSIONS MAY CHANGE WITHOUT NOTICE.
 *TOLERANCES IN DIMENSIONS ARE AS PER INTERNATIONAL STANDARDS.

VIBRACAN