
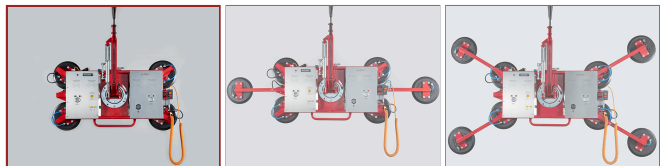


VACUUM LIFTER FOR MOUNTING

Technical specifications

[Inquire now](#)

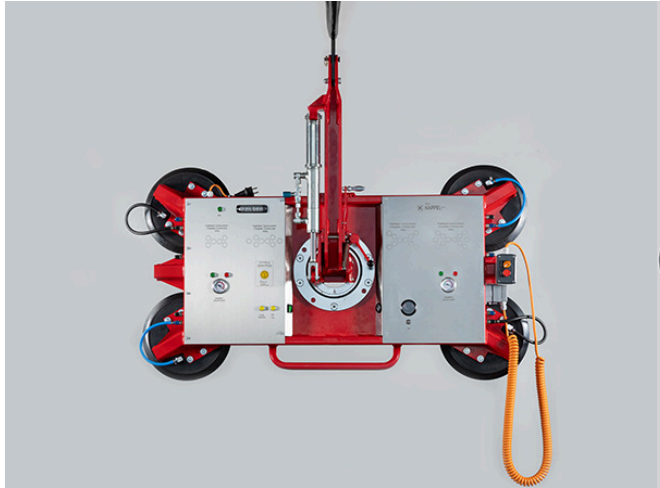

[» Back to overview](#)

DSZ2 - 12V-900

Short description	Meets the requirements for site operation according to DIN EN 13155. The DSZ2- 12V- 900 can be combined with many of our mounting devices.
Filter area	from 750 to 1.000 kg
Dual circuit system	2 vacuum circuits, independent of each other
Suction pad	12 pieces, type 150K
Extensions	6 piece
Load capacity	450 kg with 6 suction cups, without extensions 600 kg with 8 suction cups, with 2 extensions 750 kg with 10 suction cups, with 4 extensions 900 kg with 12 suction cups, with 6 extensions
Turn	360° manual, lockable every 90 °
Sway	90° manual, stepless, with lowering cylinder
Power supply	12V battery mains-independent with integrated charger
Furnishing	• Voltage indicator, shows the battery charge level • Vacuum display, shows the current vacuum level • Acoustic warning signal when vacuum is undershot
Service	Cable remote control, suction-release with quick-release function
Own weight	approx. 140 kg
Options	Radio remote control for suction, release with quick release function