


Date:	
Type:	
Firm Name:	
Project:	

LinearPro Wall Washer VAC

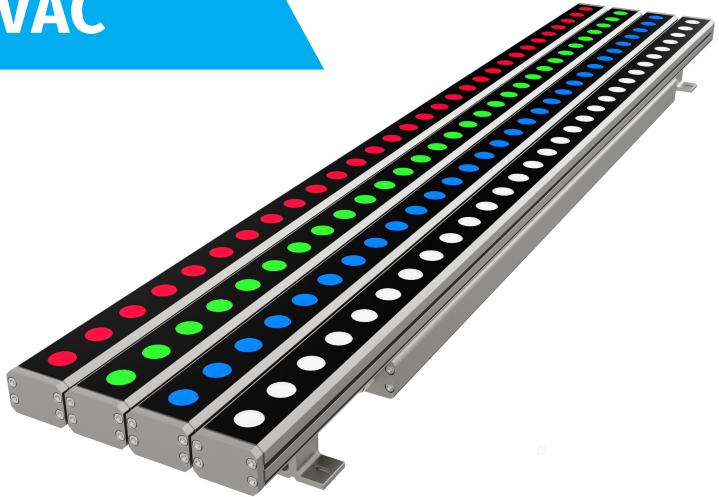

Specifications

Product Code	Color	Nominal Length	Wattage	Input	Technology	Beam Angle	Operating Temperature	Aluminum Finish
W-LP16-20-AFWR-XX	RGBW	16"	20W	120-220VAC	DMX512-RDM	35°, 20° x 50°	14°F - 122°F	RAL9006 (Grey)
W-LP24-30-AFWR-XX	RGBW	24"	30W	120-220VAC	DMX512-RDM	35°, 20° x 50°	14°F - 122°F	RAL9006 (Grey)
W-LP36-45-AFWR-XX	RGBW	36"	45W	120-220VAC	DMX512-RDM	35°, 20° x 50°	14°F - 122°F	RAL9006 (Grey)
W-LP48-60-AFWR-XX	RGBW	48"	60W	120-220VAC	DMX512-RDM	35°, 20° x 50°	14°F - 122°F	RAL9006 (Grey)

* White options of 3000K, 4000K, 6500K

Cable Conductor Specifications


Cable	Function	Wire Color
Power Lead In	AC Live	Black
	AC Neutral	White
	AC Ground	Green
DMX Lead In	DMX+	Purple
	DMX-	Pink
	DMX GND	Yellow




Product Specification

Units: mm


W-LP16-20-AFWR-XX

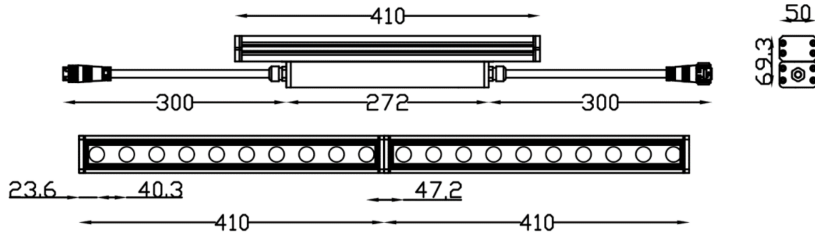


W-LP24-30-AFWR-XX

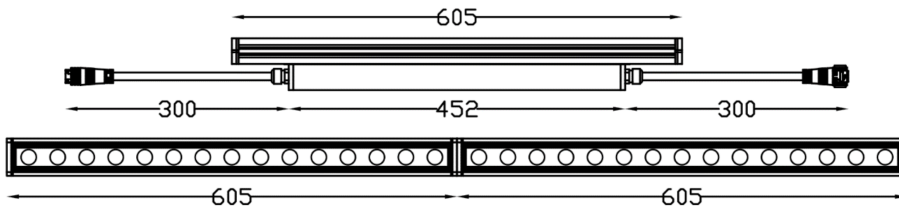

W-LP36-45-AFWR-XX




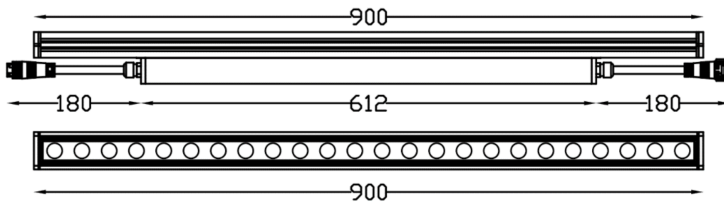


W-LP48-60-AFWR-XX

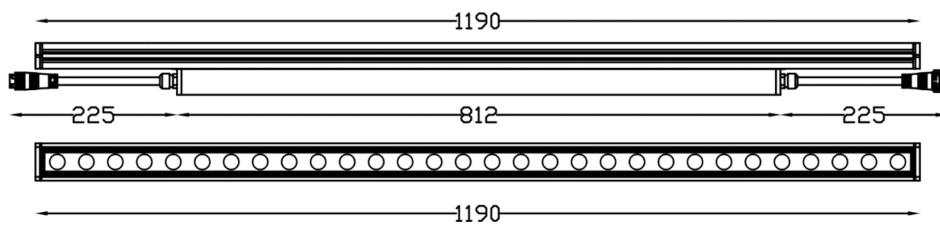





Mounting Accessories

Units: mm







ITEM: W-LP-Mount-81

DESCRIPTION: Adjustable mounting option for applications that require angle adjustments. It can rotate up to 180 degree.

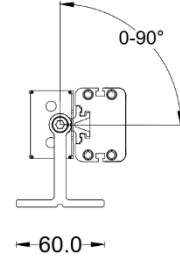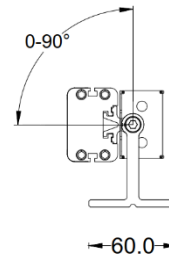

ITEM: W-LP-Mount-100

DESCRIPTION: Adjustable mounting option for applications that require angle adjustments. It can rotate up to 180 degree.

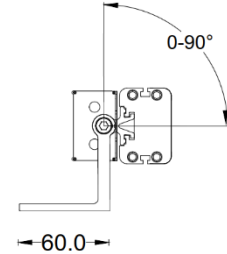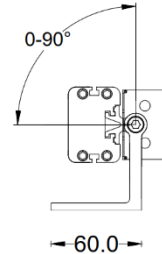

ITEM: W-LP-Mount-Lbracket

DESCRIPTION: L-shape adjustable mounting option for applications that require angle adjustments. It can rotate up to 180 degree.




Mounting Accessories

Units: mm





ITEM: W-LP-Antiglare
Asymmetric anti-glare louver that coordinates to length of the wall washer.

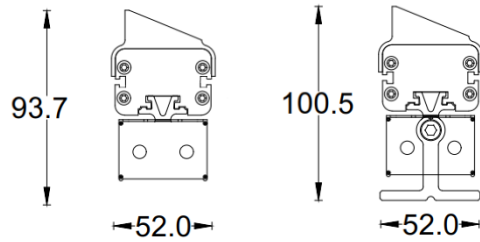


ITEM: W-LP-Mount-Stake

DESCRIPTION: Adjustable mounting option for landscape lighting application

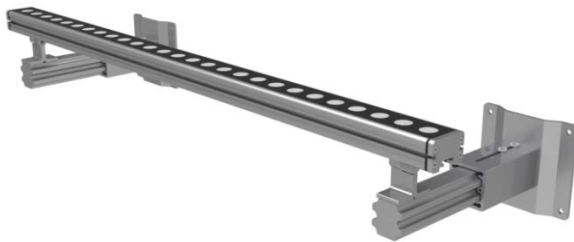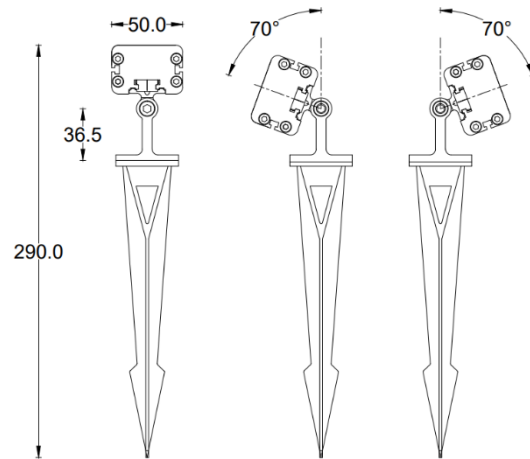

ITEM: W-LP-Mount-ExtendedS
ITEM: W-LP-Mount-Extended

Wall mount option for application that requires wall mounting with length 150mm – 230mm
Wall mount option for application that requires wall mounting with length 355mm – 560mm

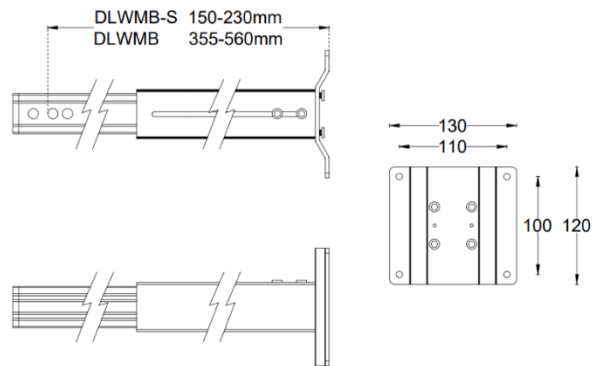

**need to order this item together with the fixture as it requires special mounting brackets to lock the wall mounting arm.*



Cable Accessories

Product Code	Description
W-CNT-6F	Wall Washer connector, IP66, 6-pin Female, AC Power and DMX Signal input
W-CNT-6F-33M	Wall Washer connector, IP66, 6-pin Female, T Connector to separate AC Power Input and DMX Signal Input wiring connections
W-CNT-3F-AC	Wall Washer connector, IP66, 3-pin Female, AC Power input
W-CNT-3F-DMX	Wall Washer connector, IP66, 3-pin Female, DMX Signal input
W-CNT-6T	Wall Washer connector, IP66, 6-pin T Connector to reintroduce AC Power
W-CNT-6JP-XX	Wall Washer connector, IP66, 6-pin Jumper, XX inch length
W-TMN-6M	Wall Washer connector, IP66, 6-pin Male, DMX Terminator (end of run)

