




VANDLOVU
Group

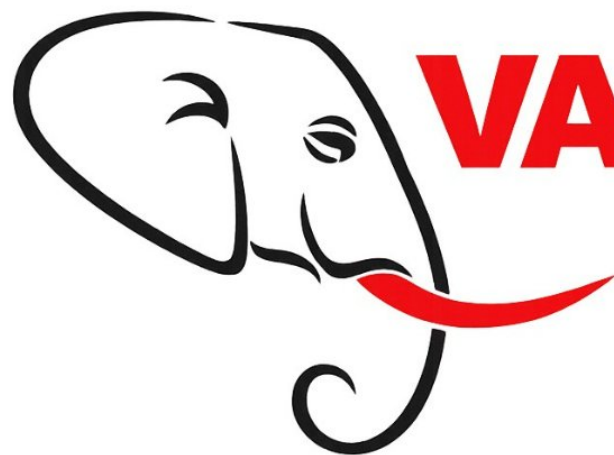

SAFEQUIP

PRODUCT GUIDE



SALES1@VANDLOVU.CO.ZA
PPESALES@VANDLOVU.CO.ZA
SALES2@VANDLOVU.CO.ZA

ENQUIRE NOW

Dry Chemical powder fire extinguishers are the **most widely used** of all types of extinguishers.



DCP FIRE EXTINGUISHERS

We provide a wide range of stored pressure dry chemical powder extinguishers suitable for A, B or C class fires or a combination of A/B/C class fires. All the extinguishers supplied, conform to the minimum fire ratings as specified in SANS 1910:2009.

Dry chemical powders have been developed over a period of thirty years and can be supplied as Alpha Dynaflo (SABS grade 3A/5B) an ultra-high performance product or in various grades down to our Alpha Megaflo which carries a 2A/2B rating.

The powders are siliconised for superior flow and anti-caking.



0.6kg
DCP
FIREMATE

The 0.6kg is the smallest extinguisher in our range, classified as disposable and conforms to:

SANS1322

FIRE
RATING
3A/8B

Specifications:
Height: 285mm
Diameter: 68mm
Mass empty: 0.6kg
Mass full: 1.2kg
Discharge: >6sec
Working pressure: 1400kPa
Test pressure: 2100kPa
Burst pressure: >5500kPa
Safety valve: none



1.0kg
DCP
FIREMATE

The 1kg extinguisher is suitable for Class A, B or C fires or combination and ideal for home use.

FIRE
RATING
5A/21B

Specifications:
Height: 330mm
Diameter: 80mm
Mass empty: 0.8kg
Mass full: 1.8kg
Discharge: >6sec
Working pressure: 1400kPa
Test pressure: 2100kPa
Burst pressure: >5500kPa
Safety valve: +/- 2200kPa



1.5kg
DCP
FIREMATE

The 1.5kg is the ideal extinguisher for the motor racing industry and fire protection in your motor.

FIRE
RATING
5A/34B

Specifications:
Height: 360mm
Diameter: 110mm
Mass empty: 1.3kg
Mass full: 2.8kg
Discharge: >6sec
Working pressure: 1400kPa
Burst pressure: >5500kPa
Test pressure: 2100kPa
Safety valve: +/- 2200kPa



2.5kg
DCP
FIREMATE

The 2.5kg is highly effective fire extinguisher that provides rapid fire knock down. Suitable for offices and factories.

FIRE
RATING
8A/55B

Specifications:
Height: 415mm
Diameter: 110mm
Mass empty: 1.4kg
Mass full: 3.9kg
Discharge: >6sec
Working pressure: 1400kPa
Test pressure: 2100kPa
Burst pressure: >5500kPa
Safety valve: +/- 2200kPa



4.5kg
DCP
BLUECRANE

Fitted with a high pressure discharge hose and nozzle.

FIRE
RATING
21A/113B

Specifications:
Height: 435mm
Diameter: 179mm
Mass empty: 3.3kg
Mass full: 7.8kg
Discharge: >9sec
Working pressure: 1400kPa
Test pressure: 2100kPa
Burst pressure: >5500kPa
Safety valve: +/- 2200kPa



9kg
DCP
BLUECRANE

Fitted with a high pressure discharge hose and nozzle.

FIRE
RATING
27A/183B

Specifications:
Height: 545mm
Diameter: 178mm
Mass empty: 4.2kg
Mass full: 13.2kg
Discharge: >12sec
Working pressure: 1400kPa
Test pressure: 2100kPa
Burst pressure: >5500kPa
Safety valve: +/- 2200kPa



DCP FIRE EXTINGUISHERS SPARES & ACCESSORIES



				
Stored Pressure Type Valve Assembly Available in small medium and large.	Stored Pressure Extinguisher Gauge M10 x1.0 mm thread or 1/8 NPT thread	Extinguisher Plunger	Extinguisher Safety Pin	4.5kg & 9kg Discharge Hose
				
Backing Boards Available in pine, siligna and budget pine.	Discharge Hose Nozzle Available in: 1kg / 1.5kg / 2.5kg	Fire Extinguisher Cover UV resistant cover for 4.5kg and 9kg extinguishers.	J Brackets Hanging wall bracket for 4.5kg and 9kg extinguishers.	

CO₂ FIRE EXTINGUISHERS

What is a CO₂ extinguisher used for?

They were originally designed for class B fires, (flammable liquid fires, such as oil, petrol and solvents), however, these days CO₂ extinguishers are mainly used for fire fighting on live electrical equipment. They are often installed next to foam extinguishers in offices with computers.

How does carbon dioxide put out a fire?

Carbon dioxide extinguishes work by displacing, or taking away the oxygen element of the fire triangle. The carbon dioxide is also very cold as it comes out of the extinguisher, so it cools the fuel as well.

Why is carbon dioxide used as an extinguisher?

CO₂ is a non-conductive and non-corrosive gas used to reduce the amount of oxygen available to the fire. Carbon dioxide is extracted from the atmosphere and stored at high pressure in liquid state within a fire extinguisher.



2kgCO₂
ALUMINIUM
ALLOY

The 2kg CO₂ Aluminium Alloy fire extinguisher is top of the range and ideal for offices.

5kgCO₂
ALUMINIUM
ALLOY

The 5kg CO₂ is made of high quality aluminium alloy, ideal for large offices and factories.

2kgCO₂
ALLOY
STEEL

This 2kg Alloy Steel fire extinguisher is the lightest in our range designed for fires involving flammable liquids and electrical hazards.

5kgCO₂
ALLOY
STEEL

This 5kg Alloy Steel fire extinguisher is the lightest in our range designed for fires involving flammable liquids and electrical hazards.

CE0036 TUV APPROVED

Specifications:

Height: 575mm
Diameter: 111mm
Tara Mass: 3.8kg
Mass Full: 6.0kg
Discharge: >8Sec
Effective Range: 1-3m
Discharge Nozzle: Swivel Horn
Working Temperature: -30/+60°C
Max Working Pressure: 174bar
Test Pressure: 250bar
Design Standard: 1997/23/EC
Safety Device: Bursting Disc 200±20bar

Specifications:

Height: 690mm
Diameter: 159mm
Tara Mass: 8.5kg
Mass Full: 14.2kg
Discharge: >13Sec
Effective Range: 1-4m
Discharge Nozzle: Hose & Horn
Working Temperature: -30/+60°C
Max Working Pressure: 174bar
Test Pressure: 250bar
Design Standard: 1997/23/EC
Safety Device: Bursting Disc 200±15bar

AIA VERIFIED & TUV CERTIFIED

Specifications:

Height: 585mm
Diameter: 103mm
Mass empty: 4.3kg
Mass full: 6.5kg
Effective Range: 1-3m
Discharge: >8sec
Working pressure: 174bar
Test pressure: 250bar
Safety Device: Bursting Disc 200±20bar

Specifications:

Height: 770mm
Diameter: 135mm
Mass empty: 8.4kg
Mass full: 14.4kg
Effective Range: 1-4m
Discharge: >13sec
Working pressure: 174bar
Test pressure: 250bar
Safety Device: Bursting Disc 200±15bar



CO₂ SPARES & ACCESSORIES

			
CO₂ Extinguisher Head Available in 2kg and 5kg	CO₂ Hoses and Horns Available in 2kg and 5kg	Backing Boards Available in pine, siligna and budget pine.	CO₂ Uni Bracket Available in 2kg and 5kg

EXTINGUISHING TROLLEY UNITS

CO₂ FIRE EXTINGUISHERS

CO₂ TROLLEY UNITS

The CO₂ mobile fire extinguishers range makes provision for those fire risks where hand-held extinguishers would be inadequate and a fixed engineered system would not be justified. CO₂ trolleys are uniquely suited to hold CO₂ fire extinguishers. It provides the user with effective mobile firefighting alternatives since it can be moved around easily.

2x10kg CO₂ TROLLEY UNIT

Specifications:

Overall Height: 1160mm
Weight Full: 64kg
Trolley Height: 1300mm
Tank Capacity: 10kgx2
Jet length: 2.5m
Discharge time: 25s
Test Pressure: 250bar
Bursting Disc: 200bar +/- 15bar



10kg CO₂ TROLLEY UNIT

Specifications:

Overall Height: 1160mm
Weight Full: 31.8kg
Trolley Height: 1300mm
Tank Capacity: 10kg
Jet length: 2.5m
Discharge time: 15s
Test Pressure: 250bar

**FIRE
RATING
89B**

EXTINGUISHING TROLLEY UNITS

DCP TROLLEY UNITS

FOAM TROLLEY UNITS



25kg DCP TROLLEY UNIT

This 25kg DCP unit can reach 7m when fighting a fire where access is limited. Epoxy powder coating paint prevents corrosion on the fire extinguisher trolleys and is designed to protect large industrial and marine risks. Suitable for Class A, B, C fires.

Specifications:

Height of cylinder: 795mm
Diameter of cylinder: 250mm
Mass empty: 14kg
Mass full: 39kg
Charge: 25kg
Effective range: ≥7m
Discharge time: ≥15s
Discharge nozzle: Hose & Pistol
Working pressure: 1400kPa
Propellant: Nitrogen

**FIRE
RATING
43A/233B**

50kg DCP TROLLEY UNIT

This 50kg DCP trolley can reach up to 9m when fighting a fire where access is limited. Suitable for Class A, B, C fires.

Specifications:

Height of cylinder: 1020mm
Diameter of cylinder: 300mm
Mass empty: 22kg
Mass full: 72kg
Charge: 50kg
Effective range: ≥9m
Discharge time: ≥25s
Discharge nozzle: Hose & Pistol
Working pressure: 1400kPa
Propellant: Nitrogen

**FIRE
RATING
55A/233B**

50kg FOAM TROLLEY UNIT

This 50kg foam trolley can reach up to 9m when fighting a fire where access is limited. Suitable for Class A and Class B fires.

Specifications:

Height of cylinder: 875mm
Diameter of cylinder: 320mm
Mass empty: 32kg
Mass full: 82kg
Charge: 50 L
Effective range: 2-10m
Discharge time: >30s
Discharge nozzle: Hose & Pistol
Working pressure: 1400kPa
Propellant: Nitrogen

HL120 FOAM TROLLEY UNIT

The innovatively designed HL120 Mobile Foam Unit is a fully self-contained mobile unit, which has been specifically developed for the rapid deployment of foam extinguishing agent to fires and chemical spills.

Specifications:

Weight (empty): 65kg
Tank Capacity: 120L
Flow rate: 4L/s
Pressure: 0.7MPa
Working Pressure Range: 0.6-0.8MPa
Discharge Range: ≥15m
Mixing Ratio: 1% - 6%
Expansion Ratio: ≥4
25% Drainage Time: ≥60s

OTHER PORTABLE EXTINGUISHERS



9kg PURPLE K EXTINGUISHER
9L WATER EXTINGUISHER
9L FOAM EXTINGUISHER
6L WET CHEMICAL EXTINGUISHER
Class D 9kg FIRE EXTINGUISHER

The 9kg Safequip Purple K fire extinguisher is one of the MOST EFFECTIVE DRY chemicals in fighting Class B (flammable liquid) fires - used in military facilities, oil companies and vehicles.

Water fire extinguishers are suitable for Class A fires caused by the combustion of solid materials, mainly of organic origin, such as: wood, paper, straw, textiles, coal etc.

This stored pressure FOAM content extinguisher is ideal for MULTI-RISK situations where both Class A combustible materials and Class B, flammable liquid/gases, are likely to be found, or where Class B risks represent a direct hazard.

Safequip's Wet Chemical Extinguisher is designed to combat Class F fires resulting from fats and edible oils burning in deep fryers.

The most effective way to fight class D fires is with dry powder extinguishing agents because they absorb heat and smother the flames, cutting off oxygen. This Class D fire extinguisher will extinguish a fire of combustible metals safely and rapidly.

FIRE RATING 223B

Specifications:
Appearance: A fine violet colour free flowing powder
Main ingredient: Potassium Bicarbonate 90%
Safequip Purple-K should never be mixed with phosphate-based fire suppression agents.

Specifications:
Height: 580mm
Diameter: 175mm
Mass empty: 3.9Kg
Mass full: 12.9Kg
Discharge: >12sec
Effective range: 3-12m
Discharge nozzle: hose & nozzle
Working temperature: -15/+60°C
Working pressure: 1400kPa
Test pressure: 2100kPa
Burst pressure: >5500kPa
Safety valve: +/- 2200kPa



Specifications:
Height: 580mm
Diameter: 176mm
Mass empty: 3.9kg
Mass full: 12.9kg
Effective range: 3-8m
Working pressure: 1400kPa
Test pressure: 2100kPa
Burst pressure: >5500kPa
Safety valve: +/- 2200kPa
Discharge time: 12sec



Specifications:
Outside Diameter: 164mm
Cylinder Height: 430mm
Total Height: 495mm
Volume (L): 7.7L
Filling ratio: 0.75
Working Pressure: 1400kPa
Test Pressure: 3000kPa
Minimum wall thickness: 1.6
Charge Weight: 7.6kg
Empty Mass: 3.9kg
Full Mass: 10.8kg

FIRE RATING 13A 75F



Specifications:
Total Height: 575mm
Diameter: 177mm
Empty Mass: 5kg
Full Mass: 14kg
Discharge: >12sec
Effective range: Lance application
Discharge method: Hose & Lance applicator
Working Pressure: 1400kPa
Safety Device: +/-2200kPa

HEAVY DUTY BRACKETS

All our Heavy Duty Brackets are made in a 9kg, 4.5kg, 2.5kg, 1.5kg & 1kg DCP Range (Single & Double Strap) 2kg & 5kg Co2 Range (Single & Double Strap) Light Duty Brackets are made in a 2.5kg, 1.5kg & 1kg (Single or Double Strap).

		
Extra Heavy-Duty Round Base Bracket – For Mining / Trucking Range	Normal Heavy-Duty Single Strap Bracket 4.5kg and 9kg DCP	Normal Heavy-Duty Double Strap Bracket 4.5kg and 9kg DCP
		
Heavy-Duty Single Strap Bracket 1.5kg and 2.5kg DCP	Heavy-Duty Single Strap (CO2) Bracket	Heavy-Duty Double Strap (CO2) Bracket
Our HD Brackets are also made to fit numerous sizes by adding the extra loops, we normally add 2 loops for basic adjustment but can add more if requested.		
		
	Light Duty Vehicle Bracket with Cages/Straps	Light Duty Vehicle Bracket No Cages/Straps

Firefighting hose reels should NOT be used to wash cars or trucks or hose down the drive-ways.

IT IS ONLY FOR FIREFIGHTING.

WORKING, TEST & MINIMUM BURST PRESSURE: SANS 543:2004

FIRE HOSE REELS



Safequip is a leading manufacturer and supplier of fire hose reels for commercial, industrial and public buildings for swift response to a small developing fire.

Fire hose reels are NOT to be used on electrical fires!

IMPORTANT NOTE:

A fire hose reel must be handled by people specifically trained to handle and use fire hose reels. Such fire hose reels must only be serviced by qualified and registered SABS1475 service agents who employ qualified SAQCC technicians.



STAINLESS STEEL TYPE HOSE REEL

This fire hose reel (stainless steel) is a high quality SABS certified fire hose reel which is supplied with a wall-mounting bracket, hose guide, durable nozzle and 30 metres hose.

- Specifications:**
- Mass without hose: 7.55kg
 - Mass with hose: 18.35kg
 - Disc diameter: 575mm
 - Height (Bracket): 660mm
 - Height (Bracket & Valve): 710
 - Wall protection: Cabinet
 - Wall projection: 250mm
 - Hose: SANS 1086 PVC
 - Hose dimension: ID 20mm x 30m
 - Valve: 25mm BSP CP
 - Length of jet: 10m @ 0.2Mpa
 - Discharge rate: 30lt/min @300kPa



FIXED TYPE HOSE REEL

This high quality SABS certified fire hose reel is supplied with a wall-mounting bracket, hose guide, durable nozzle and 30 metres hose.

- Specifications:**
- Mass without hose: 7.4kg
 - Mass with hose: 18.2kg
 - Disc diameter: 575mm
 - Height (Bracket): 660mm
 - Height (Bracket & Valve): 710
 - Wall protection: Cabinet
 - Wall projection: 250mm
 - Hose: SANS 1086 PVC
 - Hose dimension: ID 20mm x 30m
 - Valve: 25mm BSP CP
 - Length of jet: 10m @ 0.2Mpa
 - Discharge rate: 30lt/min @300kPa




SWING TYPE HOSE REEL

This high quality SABS certified fire hose reel is supplied with a swing way wall-mounting bracket, a durable nozzle and 30 metres hose, facilitating the hose reel drum to be swung away from the wall.

- Specifications:**
- Mass without hose: 7.87kg
 - Mass with hose: 19.4kg
 - Disc diameter: 575mm
 - Height (Bracket): 575mm
 - Wall protection: Cabinet
 - Wall projection: 290mm
 - Hose: SANS 1086 PVC
 - Hose dimension: ID 20mm x 30m
 - Valve: 25mm BSP CP
 - Length of jet: 10m @ 0.2Mpa
 - Discharge rate: 30lt/min @300kPa

HOSE REELS SPARES

				
Hose Reel Cover HUV RESISTANT	Hose Reel CP Valve	Aluminium Nozzle	Plastic Hose Reel Nozzel Red	Hose Reel Shackle
				
Hose Reel Waterway	SANS 1086 Hose SANS 1086 APPROVED PVC HOSE 30M	CP Valve Cover	Clamps	

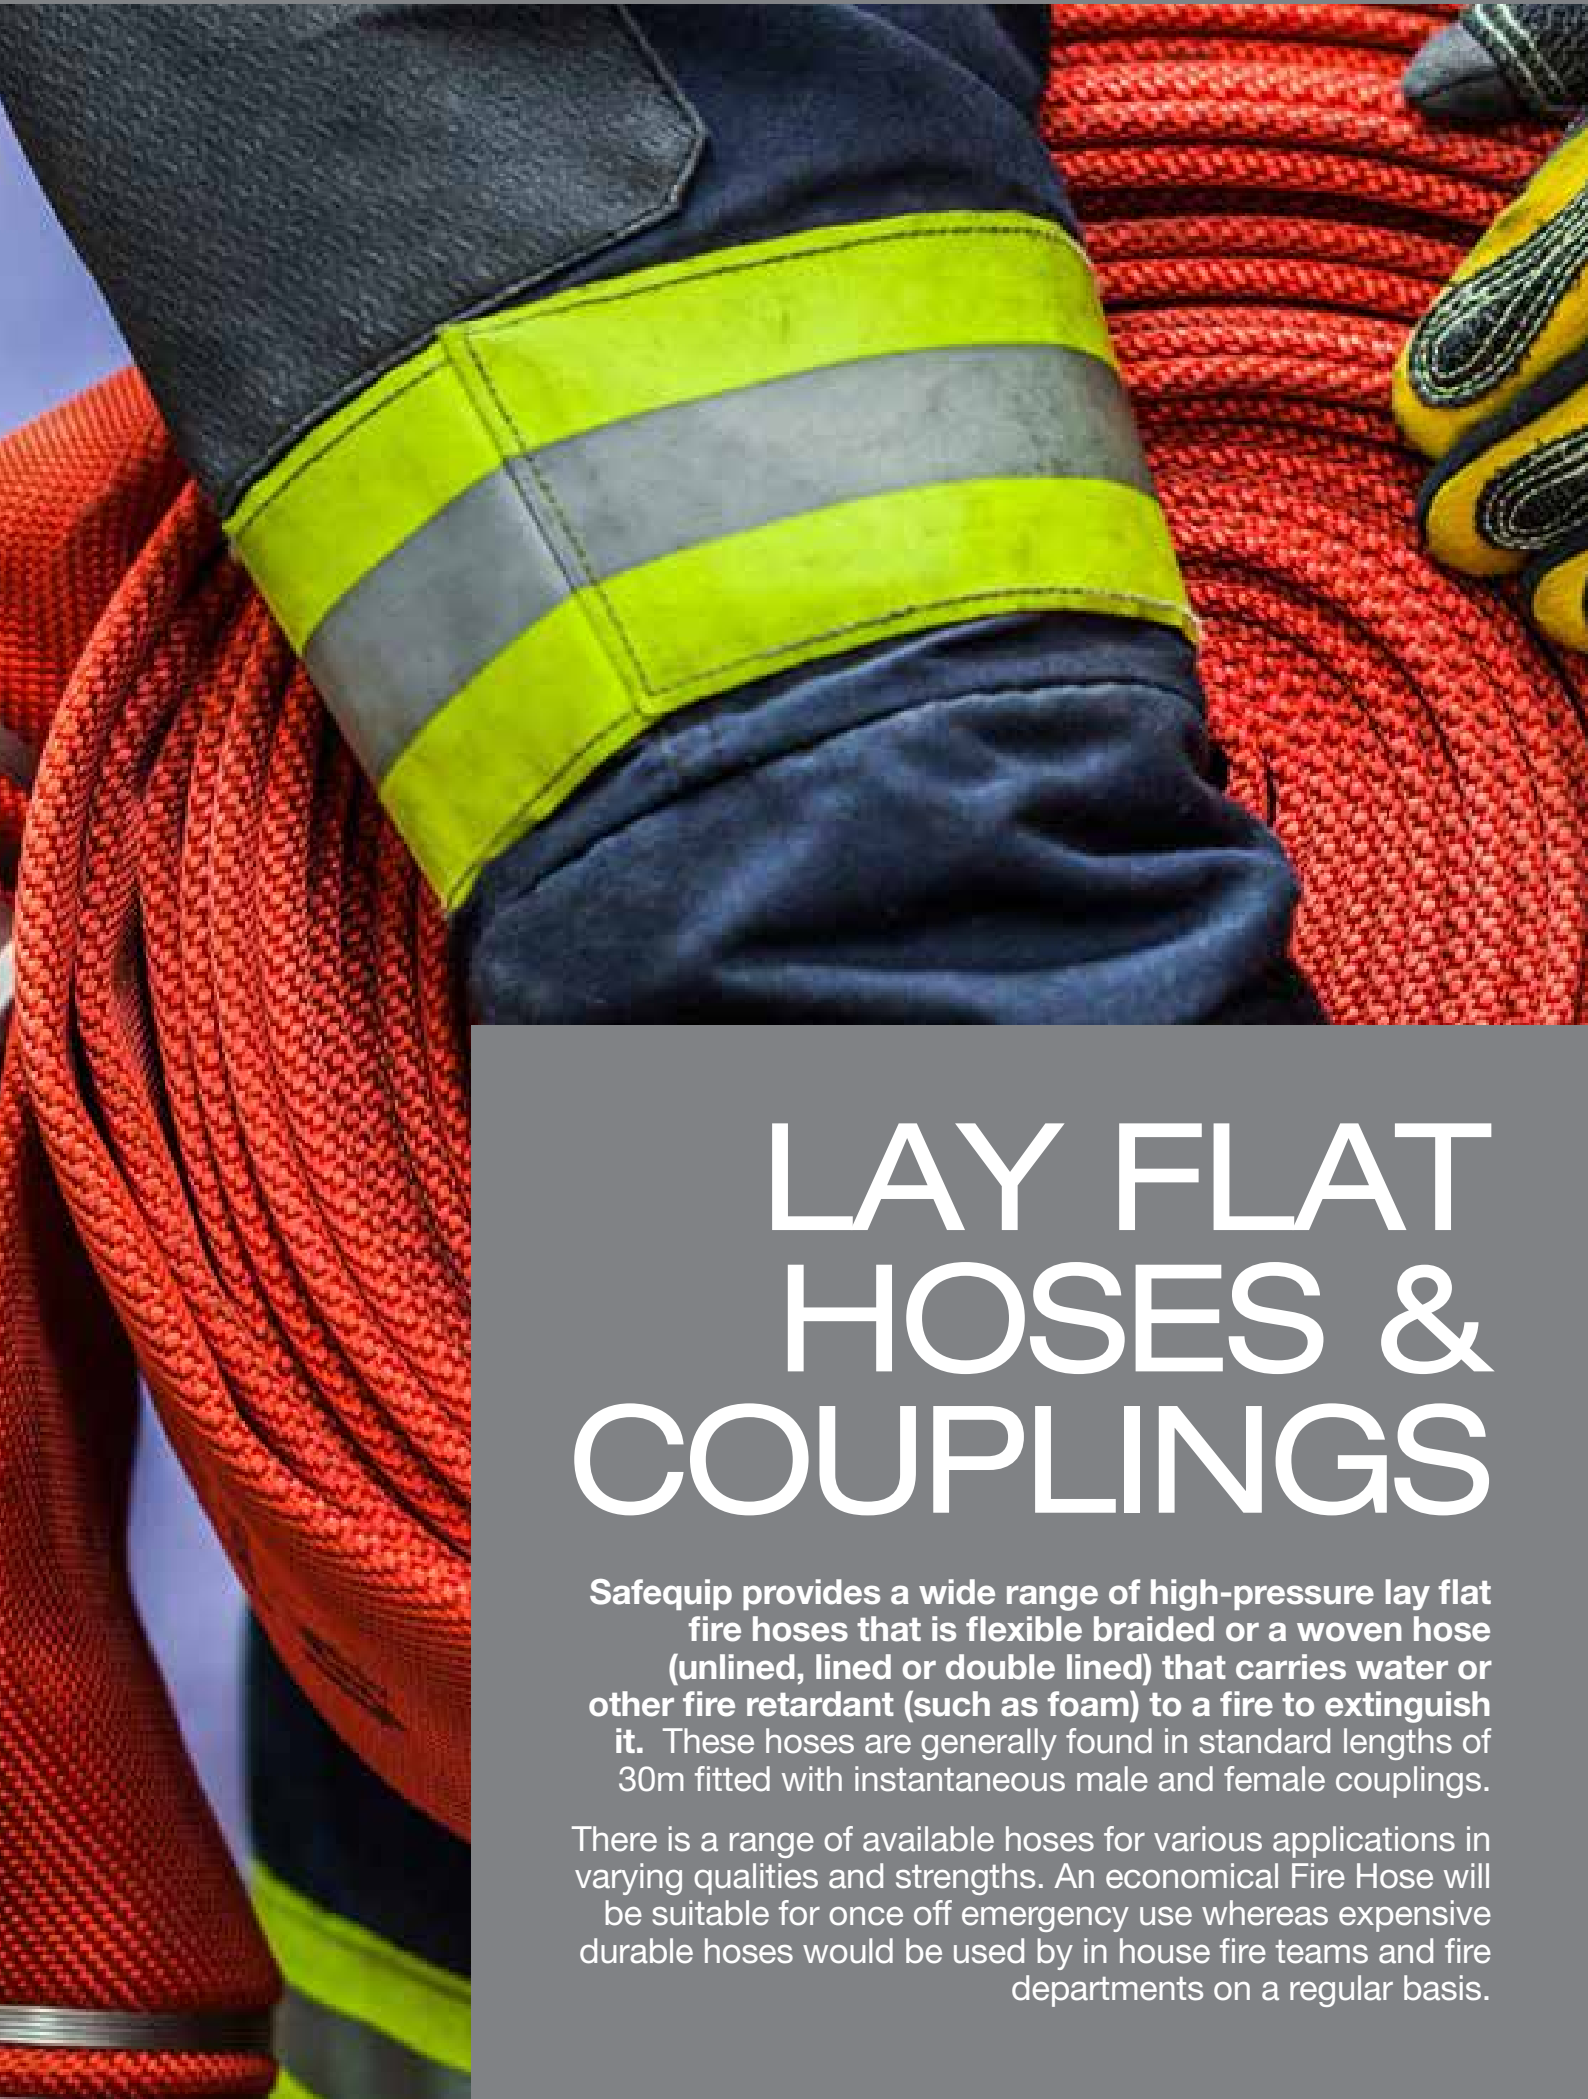

LAY FLAT HOSES & COUPLINGS

Safequip provides a wide range of high-pressure lay flat fire hoses that is flexible braided or a woven hose (unlined, lined or double lined) that carries water or other fire retardant (such as foam) to a fire to extinguish it. These hoses are generally found in standard lengths of 30m fitted with instantaneous male and female couplings.

There is a range of available hoses for various applications in varying qualities and strengths. An economical Fire Hose will be suitable for once off emergency use whereas expensive durable hoses would be used by in house fire teams and fire departments on a regular basis.



FORTEX FIRE HOSE

The Fortex fire hose is an all-purpose Nitrile Rubber Fire Hose. It is a multi-purpose hose for many industries and can be used for liquid transfer of chemicals, hydrocarbons & gasoline and all agricultural and irrigation applications.

The Fortex hose is easy to use in all climatic conditions with no drying required and is extremely durable.

Light weight and resistant to oils & chemicals and totally unaffected by weather & mildew.

SABS 1456 Part 5 approved

Benefits and features:

- Synthetic reinforced jacket for long life
- High abrasion resistance Nitrile Rubber
- Easy to use in all climatic conditions
- No drying required
- Extremely durable
- Light weight and quickly action ready

Inside Diameter	Coil Diameter per 30m length	Weight	Short length bursting kPa	Operating Pressure KPa
38mm	300mm	4600g/m	700	2000
44mm	360mm	4500g/m	650	1700
64mm	570mm	4200g/m	600	1700



MAMBA FIRE HOSE

The Mamba fire hoses are useful for water pumping applications in a number of industries, including agriculture, construction, mining and waste water.

Generally used by Fire Departments. Flat hoses was originally made from canvas that was prone to rot but now hoses are made of synthetic materials which is easy to maintain and these double jacketed hoses are specifically for extra durability.

Comes in 30m with diameters of 38mm, 45mm, 50mm, or 65mm.

Type	Coil Diameter per 30m length	Weight without couplings	Short length bursting kPa	Operating Pressure kPa
Material outside: Polyester Yam. Coating Inside: Black NBR				
White	65mm	+/-14.4kg	3900	1300
	65mm	+/-12.6kg	2400	800
	50mm	+/-11.4kg	3900	1300
	50mm	+/-9.6kg	2400	800
	40mm	+/-8.4kg	3900	1300
	40mm	+/-7.2kg	2400	800
Material outside: PVC. Coating Inside: PVC				
Red	65mm	+/-14.85kg		800
	50mm	+/-12.6kg		800
	40mm	+/-9.6kg		800
Material outside: PVC. Coating Inside: PVC				
Yellow	65mm	+/-11.7kg		1200



VALUE RANGE FIRE HOSE

The Value Range Fire Hose is a non-percolating uncoated box hose with a robust polyester jacket, rot-free and resistant to weathering and aging. The synthetic fibers in the hose jacket does not degrade over time.

The Value Range fire hose is light, very flexible and easy to handle.

Benefits and features:

- Rot proof – These hoses are rot proof, and need not be dried after use
- Increased resistance to weathering and ageing – The synthetic fibers in the hose jacket does not degrade
- Light & flexible – Coil diameter has been reduced for easy handling. The hoses are therefore light and flexible

Inside Diameter	Coil Diameter per 30m length	Weight	Short length bursting kPa	Operating Pressure KPa
38mm	380mm	170g/m	3500	1700
44mm	38mm	188g/m	3500	1700
50mm	400mm	210g/m	3500	1700
65mm	400mm	250g/m	3500	1700



DURAFLEX
FIRE HOSE

The Duraflex Progress Hose is the number one hose for firefighters worldwide, proven to be tough, durable, and resistant against abrasion, oil, fuel and a wide range of chemicals. The Duraflex hose is resistant to heat, UV and ozone and has very low friction loss with low elongation. The great advantage is that it is so easy to repair.

Working pressure is 16bar (Higher spec hoses also available.)

BS 6391 / Type 3,
DIN14811, NFPA1961

Benefits and features:

- Tough, durable and abrasion resistant
- Resistance to oil, fuel and a wide range of chemicals
- Resistance to heat, UV and ozone
- Very low friction loss and low elongation
- No cleaning / drying required
- Easy to repair

Applications

- Refineries
- Chemical Industry
- Military
- Fire Brigades
- Marine and offshore installations



COBRA
FIRE HOSE

The Cobra Fire Hose is a non-percolating hose with a robust, all-synthetic jacket. It is ideal for situations where water damage must be avoided, or where foam-making equipment is in use with excellent benefits and cost saving features. Cobra hoses are rot proof, and do not need to be dried after use, the synthetic fibers in the hose jacket are resistant to the effects of ultra violet rays and is weather resistant. The coil diameter has been reduced for easy handling and the hoses are therefore light and flexible.

SABS 1456 Part 3
approved

Benefits and features:

- Rot proof – These hoses are rot proof, and need not be dried after use
- Weather resistant – The synthetic fibers in the hose jacket are resistant to the effects of ultra violet rays
- Light & flexible



FIRECHECK
FIRE HOSE

Firecheck fire hose is a non-percolating hose with a robust, all-synthetic jacket. It is designed for use by fire brigades and for industrial use with great benefits and cost saving features. The coating allows the hose to be simply wiped clean after use and enhances abrasion resistance and increase the life of the hose. The PVC/Nitrile coating gives improved protection against oil and chemical contamination and has increased resistance to chemicals and oils. The new generation Firecheck is lighter, and has a smaller coil diameter than the conventional latex lined hose. Available in long lengths on request.

SABS 1456 Part 4
approved

Benefits and features:

- Simply wipe clean after use
- Easy to repair
- Abrasion resistance
- Increased resistance to chemicals and oils
- Light & flexible



FORESTER
FIRE HOSE

The Forester Fire Hose is a percolating hose with a robust, all-synthetic jacket. It is suitable for forest and field fires with the outer coating remaining wet during use. These hoses are rot proof, and need not be dried after use. The synthetic fibers in the hose jacket are resistant to the effects of ultra violet rays. The hose is very light & flexible due to the oil diameter that has been reduced for easy handling.

SABS 1456 Part 2
approved

Benefits and features:

- Rot proof - These hoses are rot proof, and need not be dried after use
- Weather resistant – The synthetic fibers in the hose jacket are resistant to the effects of ultra violet rays
- Light & flexible - Coil diameter has been reduced for easy handling. The hoses are therefore light and flexible

Inside Diameter	Coil Diameter per 30m length	Weight	Short length bursting kPa	Operating Pressure KPa
38mm	380mm	180g/m	4800	1200
44mm	380mm	190g/m	4500	1800
50mm	580mm	210g/m	4500	1800
64mm	400mm	265g/m	4250	1500
76mm	410mm	310g/m	3750	1200
102mm	420mm	420g/m	3600	1200

Inside Diameter	Coil Diameter per 30m length	Weight	Short length bursting kPa	Operating Pressure KPa
38mm	410mm	240g/m	5000	2000
44mm	410mm	270g/m	4800	1800
50mm	415mm	330g/m	4800	1800
64mm	420mm	370g/m	4600	1800
76mm	425mm	470g/m	4000	1500
102mm	450mm	750g/m	3800	1200

Inside Diameter	Coil Diameter per 30m length	Weight	Short length bursting kPa	Operating Pressure KPa
38mm	380mm	180g/m	3500	1200
44mm	380mm	210g/m	3250	1200
50mm	380mm	230g/m	3000	1200
64mm	400mm	290g/m	3000	1000
76mm	410mm	350g/m	2500	1000



NAKAJIMA
COUPLING

This hermaphrodite connection system has two interlocking connecting lugs for fire hose connections.

Nominal Size: 65mm
Hose Tail Size: 65mm
Weight: 1.1kg

Nominal Size: 65mm
Hose Tail Size: 50mm
Weight: 1kg

Nominal Size: 65mm
Hose Tail Size: 38mm
Weight: 0.9kg



INSTANTANEOUS
BRASS
COUPLING

This non-symmetrical quick connection coupling with a male and female part connects to hoses. It is used only in delivery operations.

Nominal Size: 65mm
Hose Tail Size: 65mm
Weight: 2.8kg

Nominal Size: 65mm
Hose Tail Size: 50mm
Weight: 2.8kg

Nominal Size: 65mm
Hose Tail Size: 44mm
Weight: 2.8kg

Nominal Size: 65mm
Hose Tail Size: 38mm
Weight: 2.75kg



INSTANTANEOUS
(ALUMINUM)
COUPLING

This non-symmetrical quick connection coupling with a male and female part connects to hoses. It is used only in delivery operations.

Nominal Size: 65mm
Hose Tail Size: 65mm
Weight: 0.98kg

Nominal Size: 65mm
Hose Tail Size: 50mm
Weight: 0.96kg

Nominal Size: 65mm
Hose Tail Size: 44mm
Weight: 1kg

Nominal Size: 65mm
Hose Tail Size: 38mm
Weight: 0.95kg



GEKA
COUPLING

Geka fittings are a great alternative to Hozelock style hose connectors.

SIZES

Geka Water Coupling:

- 1/2" Hose Tail
- 3/8" Hose Tail
- 3/4" Hose Tail
- 1" Hose Tail
- (Female) 3/4"
- (Male) 3/4"



STORZ COUPLING

When connecting two fire hydrants with different hose ends, Storz couplings provide a quick and easy solution. Storz is a quarter turn coupling, no male and female parts, with lugs on the inside of the coupling.




MACHINO COUPLING

The Machino is a quick connect-and-disconnect coupling used on fire hoses.

Machino 1 (38) 1/2 x 38mm Hose Tail 44.7 x 45.0

Machino 2 (63) 1/2 x 63mm Hose Tail 68.4 x 71.4



MACHINO
ADAPTOR

Specifications:

Equipped with a male and female fitting, the instantaneous adaptor is non symmetrical and helps firefighters to connect hoses quickly.



INSTANTANEOUS
ADAPTOR

Specifications:

A non-symmetrical quick connection coupling with a male and female part. These couplings are only suitable for delivery operation. For suction operation round thread couplings are in use.



NAKAJIMA
ADAPTOR

Specifications:

This is a type of hermaphrodite connection system with two interlocking connecting lugs.



STORZ
ADAPTOR

Specifications:

Mainly used for connecting fire hydrants; Storz is a quarter turn adapter that is easy to connect with no particular male or female parts.



EXTINGUISHING AGENTS

Safequip is a leading manufacturer and supplier of extinguishing agents such as foam and powders that can be found in solid, liquid or gaseous forms. When combined with fire suppression systems or fire sprinkler systems, they are highly effective in putting out fires.

Safequip is the only local producer of world class SABS approved quality firefighting powders.



DRY CHEMICAL POWDER (ABC CLASS)



SABS APPROVED
Dry Chemical Powder (ABC Class) are mono ammonium phosphate-based powders that are generally for multi-purpose use on Class A, B and C fires. These dry chemical powders comes in 40% and 90%.

- Uses:**
Class A fires
It insulates Class-A fires by melting at approximately 350–400 degrees F.
Class B fires
The powder breaks the chain reaction of Class-B fires by coating the surface to which it is applied.
Class C fires
It is safe and effective for Class-C fires since it is a non-conductor of electricity.
Inappropriate Uses:
ABC dry chemical is inappropriate for chlorine or oxidizer fires and on certain metal fires (Class-D) as well as cooking oil fires (Class-K).

- Products:**
- 34 - 40% ALPHA MEGAFLO
Fire rating: 2A2B
 - 90% ALPHA DYNAFLO
Fire rating: 3A5B



DRY CHEMICAL POWDER (BC CLASS)



Dry Chemical Powder is divided into a ABC Class and a BC Class. This dry chemical powder BC Class consists of the Safequip Purple K and the Soda Bic.

- SODA BIC TYPES: available on request**
- Beta Easyflo 20%
Fire rating: 2B
 - Beta Superflo 90%
Fire rating: 5B
 - Beta Hyper flo 40%

DRY CHEMICAL POWDER (CLASS D)



Certain metals are extremely combustible and must be used with caution and appropriate safety measures. These metals include magnesium, potassium, sodium titanium, alkyllithiums, grignards, and diethylzinc. These chemicals react violently with water, air, and other chemicals and cause Class D fires, which burn at high temperatures. As such, typical fire extinguishers are not sufficient for this type of fire; labs working with combustible metals must have a type D extinguisher available.



SAFEQUIP FOAM

Foam is an aerated solution which is used for fire prevention and firefighting. Foam concentrate is the full strength liquid which is diluted and processed to produce foam. The foam solution is the mixture produced by diluting foam concentrate with water before processing to make foam.

Class A foams are mostly used to fight wild fires. They assist in the wetting and saturation of Class A fuels with water, which aids fire suppression and can prevent re-ignition. Class A foams are available for use with Safequip's range of skid units.

Class B foams are best suited for putting out fires that involve flammable liquids.

Synthetic foams provide better flow and faster knock-down of flames, but offer limited post-fire security.

Protein foams are bio-degradable. They flow and spread slower than synthetic foam, but provide a heat resistant foam blanket and are more durable.



SAFEQUIP PURPLE K

Safequip Purple K is one of the most effective dry chemicals in fighting Class B (flammable liquid) fires and manufactured in-house by Safequip.

Safequip Purple K (90% Potassium Bicarbonate) is a Class BC powder and is available for use in areas such as airfields, chemical plants and refineries where superior fire extinguishing qualities are required.
Safequip Purple K is the MOST EFFECTIVE DRY chemical in fighting CLASS B (flammable liquid) fires.

Appearance: A fine violet colour free flowing powder

Main ingredient: Potassium Bicarbonate 90%

Safequip Purple-K should NEVER be mixed with phosphate-based fire suppression agents.



WET CHEMICAL

Safequip's Wet Chemical is specifically designed to combat fires resulting from fats and edible oils burning in deep fryers.



This wet chemical extinguisher reacts with hot, burning cooking oil or fat. When the fire extinguishing substance is applied to the burning liquid it will cool and emulsify the oil, and the flames will immediately subside. An effective fire extinguishing film of foam forms on the surface which prevents re-ignition.

Application:
The wet chemical agent is a special salt based fire extinguishing liquid used in fire extinguishers or stationary fire extinguishing installations for fighting fires in deep fat fryers, frying appliances as well as air exhaust facilities in kitchens and is finely distributed to the burning surface using spray nozzles.

AVAILABLE SAFEQUIP FOAM:

Stock code	Description
BETFOA009	25L AFFF 6% foam - import
BETFOA010	3% AFFF foam - import (25l drum)
BETFOA010A	3% AFFF foam - import (200l drum)
BETFOA011	General purpose foam: RLF4 equivalent
BETFOA012	Class a foam concentrate: Wetting agent
BETFOA013	3% Alcohol resist AFFF-UL list: Aqueous film forming foam



FIRE HYDRANT VALVES AND STAND PIPES

A hydrant valve is a pressurized water source for the fire fighting industry such as when a fire engine coupled to a booster connection pumping to its own delivery hoses. Safequip's fire hydrant valves are made from the finest materials in the industry.

Standpipe systems are a series of rigid vertical pipe, which connect a water supply to hose connections. They are designed to provide a pre-piped water system for building occupants or the fire department. Standpipe systems are designed to provide fire protection water for hose lines in strategically placed locations inside a building or structure. Standpipe systems along with portable fire extinguishers provide an important function to assist with manual fire control.

		
80mm (Right angle) BRASS HYDRANT VALVE Specifications: Opening mechanism: Hand wheel Height: 424mm Weight: 4.72kg Working pressure: 16bar Material: Brass	50mm Marine HYDRANT VALVE Specifications: Opening mechanism: Hand wheel Height: 155mm Weight: 1.5kg Working pressure: 16bar Material: Brass, upward oblique	80mm Tamper Proof BRASS HYDRANT AND KEY Specifications: Opening mechanism: Tamper proof key Height: 474mm Weight: 4.22kg Working pressure: 16bar Material: Brass
		
80mm Oblique BRASS HYDRANT VALVE Specifications: Opening mechanism: Hand wheel Height: 242mm Weight: 5.4kg Working pressure: 16bar Material: Brass	BOOSTER CONNECTOR Specifications: This is a high quality product manufactured entirely from intrinsically corrosion - resistant materials, and utilizes 'O' -Ring technology to ensure durable leak-proof and trouble-free operation.	DOUBLE BOOSTER CONNECTOR Specifications: Inlet: 2 x 65 mm male instantaneous coupling to BS 366, non-return valve, blanking caps and chain Outlet connection thread: G4" Booster: Copper alloy parts, Stainless Steel valve shaft and spring. Compact design with excellent flow characteristics Siamese Body: Copper 58-3 Rated Capacity: 1920 l/min. Test Pressure: 2000 kPa Working pressure: 1200 kPa Leak tested: 800 kPa

STAND PIPES

Product Description:
850 LVT STANDPIPE Light Aluminium FIXED HEAD
850 LRT STANDPIPE Light Aluminium FIXED HEAD
1.2 LVT STANDPIPE Light Aluminium FIXED HEAD
1.2 LRT STANDPIPE Light Aluminium SWIVEL HEAD
1.2 LVT STANDPIPE Light Aluminium FIXED HEAD
1.2 LRT STANDPIPE Light Aluminium SWIVEL HEAD
1.5 LVT STANDPIPE Light Aluminium FIXED HEAD
1.5 LRT STANDPIPE Light Aluminium FIXED HEAD
1.5M LVT STANDPIPE Light Aluminium SWIVEL HEAD
1.5M LRT STANDPIPE Light Aluminium SWIVEL HEAD



MISCELLANEOUS
FIRE
PROTECTION
EQUIPMENT

INVEST in the
little things
and PREVENT
fire damage.

			
Exit Light SABS (SANS 1091) approved. With battery backup. Complete light with 2 bulbs.	Fire blankets Available in the following sizes: 0.9m x 0.9m / 1.2m x 1.2m 1.2m x 1.8m / 1.8m x 1.8m	Smoke Alarm Tester Smoke tester for the smoke alarm.	Smoke Alarm Photoelectric smoke alarms are designed to detect fires that smoulder for hours before bursting into flame.
			
First Aid Kit Bag	Plastic First Aid Kit	Metal First Aid Kit	First Aid Kit Content
The FIRST AID KITS contains the following: Wound cleaner / antiseptic (100ml), Swabs for cleaning wounds, Cotton wool for padding (100g), Sterile gauze (minimum quantity 10), 1 pair of forceps (for splinters), 1 pair of scissors (minimum size 100mm), 1 set of safety pins, 4 triangular bandages, 4 roller bandages (75mm x 5m), 4 roller bandages (100mm x 5m), 1 roll of elastic adhesive (25mm x 3m), 1 Non-allergenic adhesive strip (25mm x 3m), 1 Packet of adhesive dressing strips (minimum quantity 10 assorted sizes), 4 First aid dressing (75mm x 100mm), 4 First aid dressings (150mm x 200mm), 2 Straight splints, 2 Pairs large and 2 pairs medium disposable latex gloves and 2 CPR mouth pieces or similar devices.			
			
Plastic fire bucket with lid	Metal Fire Bucket 10L	Metal Key Box	Plastic Key Box
			
Safe & Loud Complete Acoustic Gas Horn complete in metal box.	Safe & Loud An aerosol powered, hand held signaling alarm for instant emergency communication at the touch of a finger.	Dividing Bridge	Redlam Panic Bolt



FIRE CABINETS

MADE OF LLDPE
which is a flexible polyethylene
with high impact strength.

Fused into the plastic during the moulding
process Mold in graphics will not peel or rub off
and will last the life time of the product.

Safequip's fire cabinets is light-weight and has the following features:

- Good rigidity | Excellent impact strength | Excellent chemical resistance
- Good ESCR | Heat and UV resistant | Tough and abrasion resistant
- Metallocene copolymer

PLASTIC CABINETS

 Only available in Poly-ethylene																						
9kg TRUCK CABINET <table><tr><th>Weight (kg)</th><th>Height (mm)</th><th>Depth (mm)</th><th>Width (mm)</th></tr><tr><td>3.38</td><td>625</td><td>271</td><td>246</td></tr></table>	Weight (kg)	Height (mm)	Depth (mm)	Width (mm)	3.38	625	271	246	9.0kg CABINET <table><tr><th>Width (mm)</th><th>Height (mm)</th><th>Depth (mm)</th></tr><tr><td>330</td><td>700</td><td>250</td></tr></table>	Width (mm)	Height (mm)	Depth (mm)	330	700	250	2 x 9 CABINET <table><tr><th>Width (mm)</th><th>Height (mm)</th><th>Depth (mm)</th></tr><tr><td>520</td><td>730</td><td>265</td></tr></table>	Width (mm)	Height (mm)	Depth (mm)	520	730	265
Weight (kg)	Height (mm)	Depth (mm)	Width (mm)																			
3.38	625	271	246																			
Width (mm)	Height (mm)	Depth (mm)																				
330	700	250																				
Width (mm)	Height (mm)	Depth (mm)																				
520	730	265																				
																						
.5kg CABINET <table><tr><th>Width (mm)</th><th>Height (mm)</th><th>Depth (mm)</th></tr><tr><td>330</td><td>550</td><td>2520</td></tr></table>	Width (mm)	Height (mm)	Depth (mm)	330	550	2520	Hose Reel CABINET <table><tr><th>Width (mm)</th><th>Height (mm)</th><th>Depth (mm)</th></tr><tr><td>730</td><td>970</td><td>290</td></tr></table>	Width (mm)	Height (mm)	Depth (mm)	730	970	290	Marine CABINET <table><tr><th>Width (mm)</th><th>Height (mm)</th><th>Depth (mm)</th></tr><tr><td>730</td><td>970</td><td>290</td></tr></table>	Width (mm)	Height (mm)	Depth (mm)	730	970	290		
Width (mm)	Height (mm)	Depth (mm)																				
330	550	2520																				
Width (mm)	Height (mm)	Depth (mm)																				
730	970	290																				
Width (mm)	Height (mm)	Depth (mm)																				
730	970	290																				

STEEL CABINETS

		
4.5kg SINGLE Extinguisher Cabinet 4.5kg DOUBLE Extinguisher Cabinet	9kg SINGLE Extinguisher Cabinet 9kg DOUBLE Extinguisher Cabinet	Sprinkler Box

SYMBOLIC SAFETY SIGNAGE

SIGNAGE

Safequip manufactures and supplies top quality fire safety equipment and also a wide variety of SABS approved warning signs and fire safety signs, including chevron boards available in ABS or phosphorescent in two different sizes such as 190mmx190mm, 290mmx290mm or any other size you require.

The complete collection is available.
Symbolic Safety Signs SANS 1186 part 1 & 5



FIRE SIGNS

INFORMATION SIGNS


MANDATORY SIGNS

PROHIBITORY SIGNS

WARNING SIGNS

ANY SIGN YOU NEED, WE CAN PROVIDE...

NO ENTRY

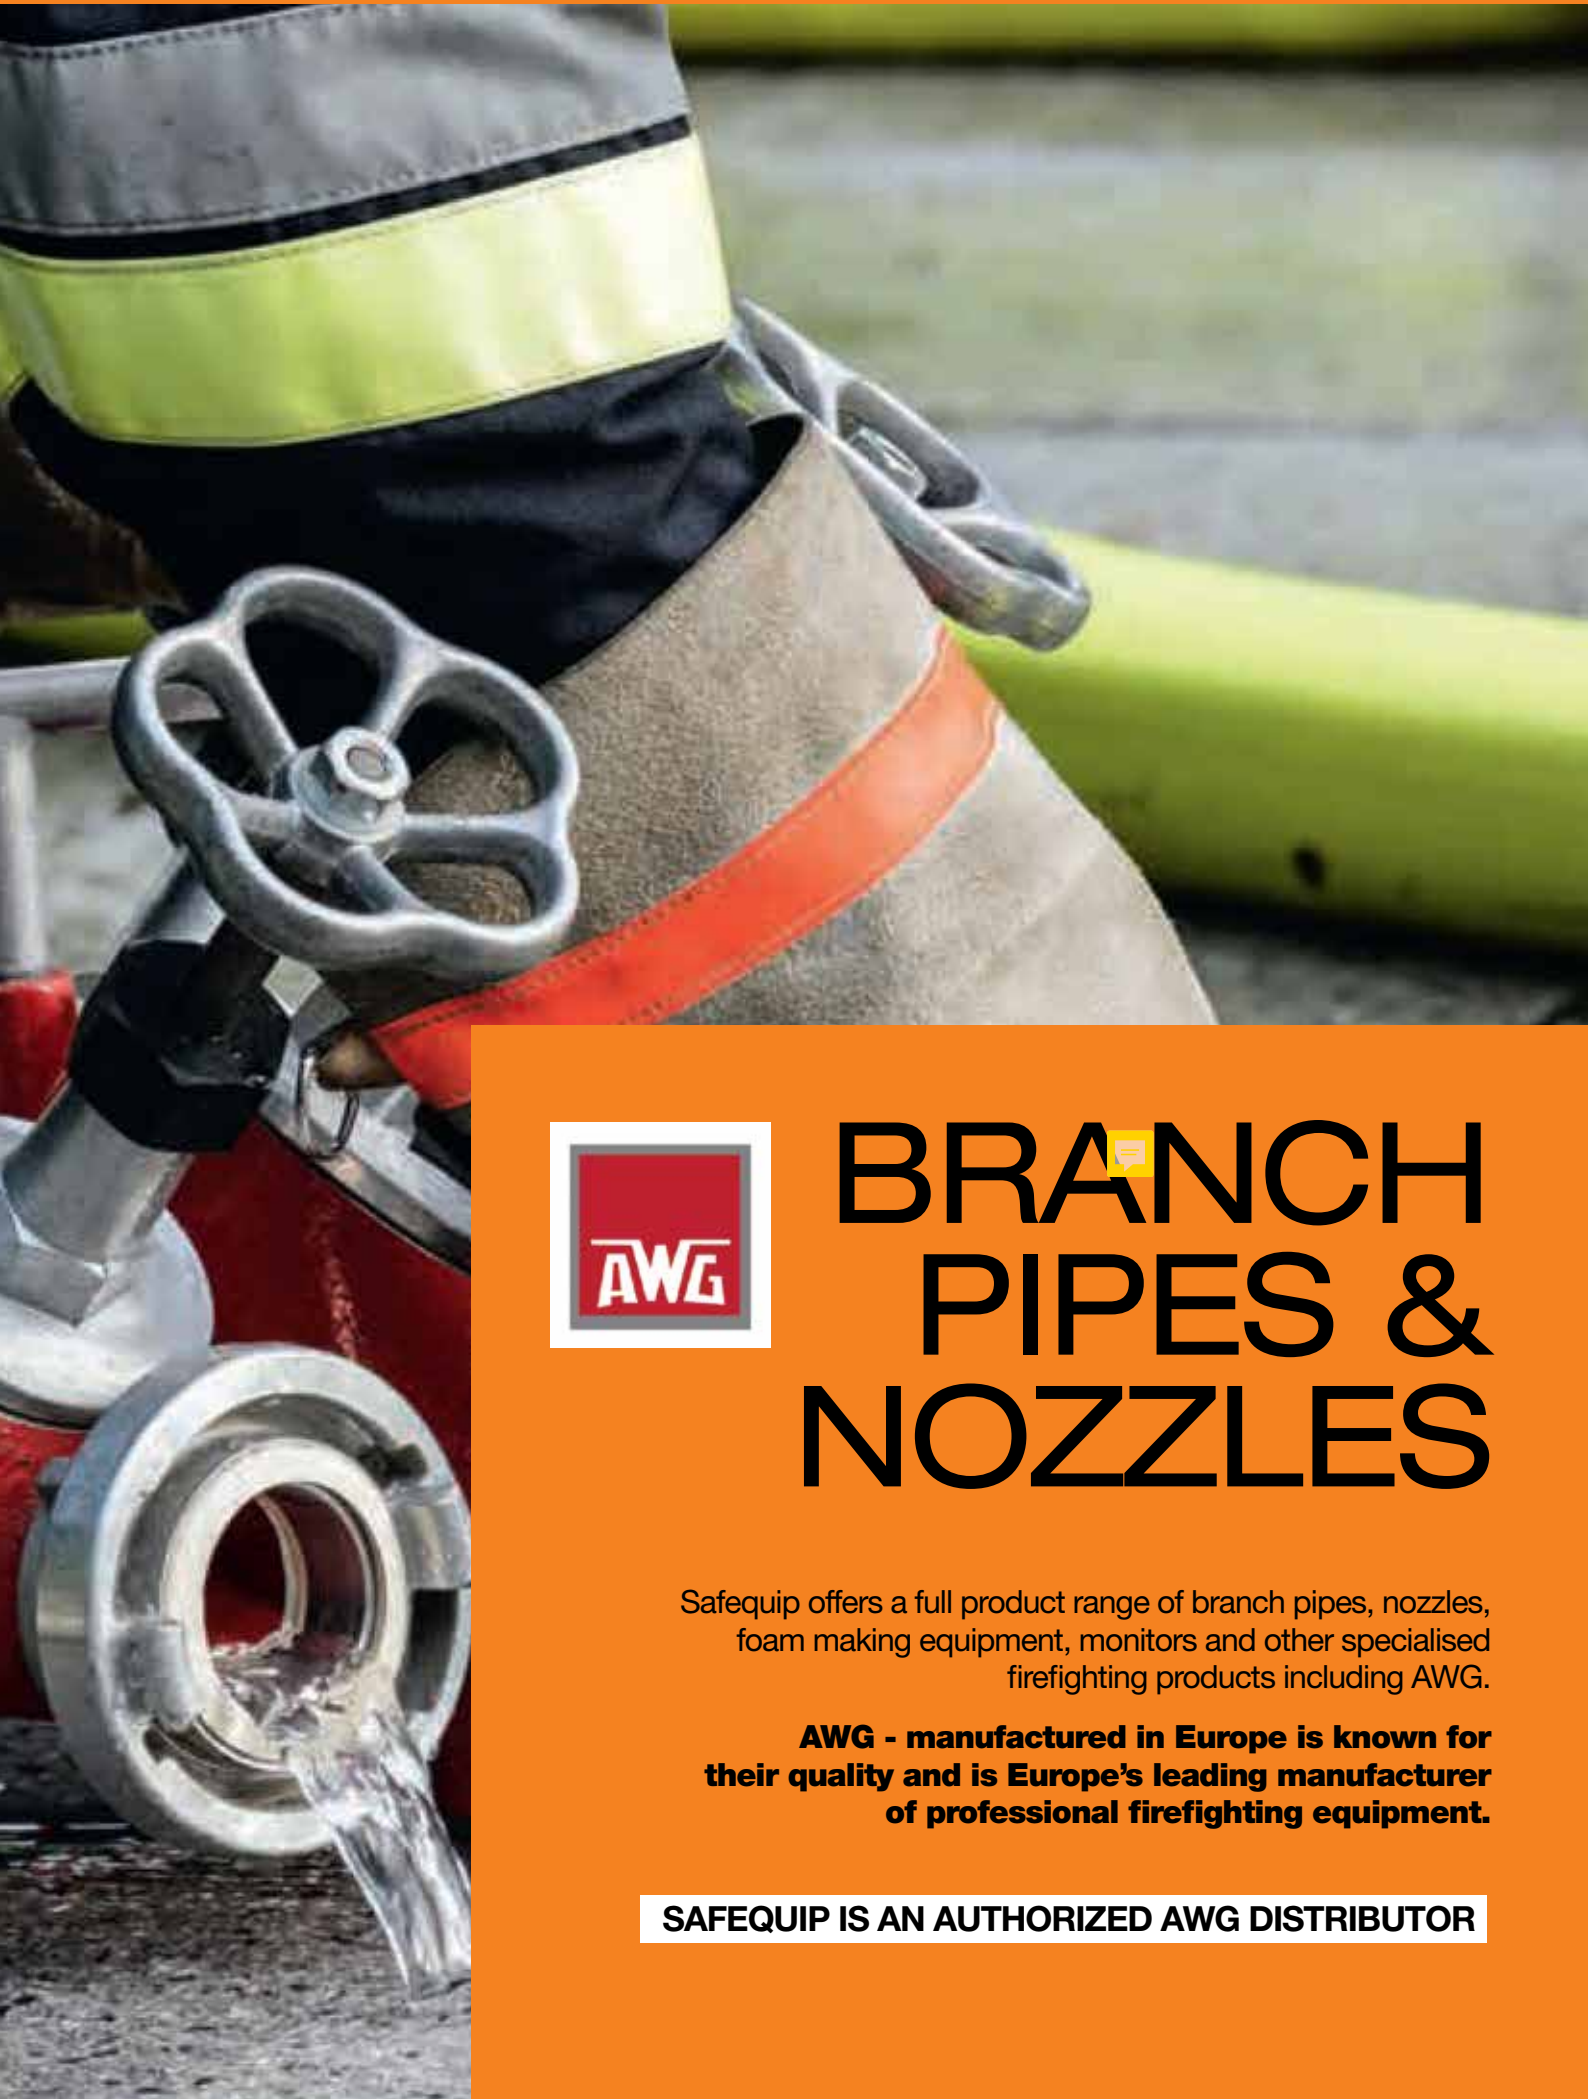

BRANCH PIPES & NOZZLES

Safequip offers a full product range of branch pipes, nozzles, foam making equipment, monitors and other specialised firefighting products including AWG.

AWG - manufactured in Europe is known for their quality and is Europe's leading manufacturer of professional firefighting equipment.

SAFEQUIP IS AN AUTHORIZED AWG DISTRIBUTOR



NOZZLES & BRANCH PIPES



S2 BALL VALVE FOAM NOZZLE



Z2 INDUCTOR& PICK-UP TUBE



AWG MONITORS



TURBO FIRE FIGHTER



2 Way Ball Valve Divider



3 Way Ball Valve Divider



Siamese 3 Way Collecting Branch



VALUE RANGE BRANCH PIPES & NOZZLES

Safequip offers a full product range of branch pipes, nozzles, foam making equipment, monitors and other specialised firefighting products.



PISTOL GRIP DISCHARGE HOSE NOZZLE N/P

- Durable handle design for quick open/close operation
- Stainless filter mesh prevents blockage caused by debris
- Various inlet options; BIC 65mm / Storz
- Reinforced metal piece improves durability
- Enhanced positivity of flow selection
- Laser-etched anodized label for excellent durability and visibility
- 120° turn from jet to fog
- Stainless steel spinning teeth
- Flow pattern detents facilitate positive positioning and smooth action

PISTOL GRIP HOSE REEL LINE NOZZLE

- Durable handle design for quick open/close operation
- Stainless filter mesh prevents blockage caused by debris
- Various inlet options; 25mm BSP inlet: Brass Geka / Storz
- Ergonomic design pistol grip
- Reinforced metal piece improves durability
- Enhanced positivity of flow selection
- Stainless steel spinning teeth
- Laser-etched anodized label for excellent durability and visibility
- Flow pattern detents facilitate positive positioning & smooth action



SELECTABLE (ADJUSTABLE) GALLONAGE HANDLINE NOZZLE

Adjustable gallonage nozzles allow the nozzle operator to manually select a desired gallonage without shutting down. Like the single gallonage nozzle, some of today's adjustable gallonage nozzles can provide quality patterns even at reduced nozzle pressures.

Features

- Material: Aluminium or Brass.
- 120 Degree Turn from jet to fog pattern. Meets NFPA 1964.
- SS Series nozzles are selectable gallonage nozzles. Standard 7 Bar operation Pressure.
- 316 stainless steel turbine ensure corrosion resistance and durability.
- Flush without shutting down, Nozzle standard with Ball valve type shut off, and optional on some models with Slide valve operation.
- Combination of fog and straight stream, Nozzle also available with Low pressure operation to 5 Bar. 25mm Handline Nozzle work Working Pressure up to 40 Bar.
- Provide with different sizes and types of end connections.
- All the products will be 100% tested before being packaged for shipment.

Nozzle Flow Setting Chart

Product No.	Material	Size	Flow Settings (LPM)
SS201	Aluminum	1" (25mm)	Selectable 19-37-90-150@7bar
SS202	Aluminum	1" (25mm)	Selectable 50-100-150-230@7bar
SS401	Aluminum	1.5" (38mm)	Selectable 114-227-360-475@100psi
SS402	Aluminum	1.5" (38mm)	Selectable 114-227-360-475-568@7bar
SS601	Aluminum	2.5" (65mm)	Selectable 114-227-360-475-568-757@7bar
SS603	Aluminum	2.5" (65mm)	Selectable 360-475-568-757-946@7bar
SS701	Aluminum	2.75" (65mm)	Selectable 750-950-1135-1300@7bar

MULTI-PURPOSE NOZZLE WITH PISTOL GRIP



Features

- Synchronised solid bore and fog stream capability
- Optional solid bore tip size of 3/4", 7/8", 15/16" or 1"
- Adjustable fog stream with pattern detents and twist shutoff
- Laser-etched anodized label for excellent durability and visibility
- Flush without changing pattern or shutting down
- Ergonomic design pistol grip available in various colours
- Heavy-duty chrome plated metal shutoff ball for smooth action and long life
- Stainless filter mesh prevents blockage caused by debris
- Exceptionally lightweight and compact
- Suitable for use with CAFS systems

Specifications

Style:	SS2
Product Name:	Multi-Purpose Nozzle with Pistol Grip
Flow Rate:	FOG FLOW: 135 GPM (510 LPM)
Operating Pressure:	100 psi (7 bar)
Inlet:	1-1/2" (38 mm), 2-1/2" (65 mm)
Test:	Spinning
Material:	Alloy
Length:	11" (280 mm)
Weight:	5.8 lbs (2.6 kg)
Compatible Products:	214

Protect your property with
SA's no.1 firefighter.

AGRICULTURAL
FIRE EQUIPMENT
AND PUMPS

Safequip has a broad selection of veld firefighting equipment, with the most popular product being the Fire King mobile firefighting unit. Safequip specialises in manufacturing skid units and offers a variety of products to suit every clients individual needs.

MODEL	IMAGE	DESCRIPTION	PUMP	PUMP FLOW RATE	TOTAL HEAD/BAR	ENGINE	ENGINE CAPACITY	TANK CAPACITY	BAFFLE PLATES	SUCTION DIAMETER	HOSE OUTLETS	HOSE LENGTH	HOSE TYPE	SPRAY REACH	APPLICATIONS	BRANCH PIPE/ NOZZLE
Twin Impeller Skid Unit 700l Tank		The Twin Impeller Skid Unit includes a 60m delivery hose and a 5m suction hose assembly that is ideal for high volume application. The unit includes quick coupling on suction.	Davey 5/8" Twin Stage Firefighter	400lpm	10 Bar	Honda GX160	5.5hp	700L Fibre Glass Tank	Yes	5m/ 40mm	3 outlets (hose reel incl.)	60m	Drag line SABS 10 bar	<=20m	Able to switch between applications while engine is running	German AWG mini jet/spray nozzle
Single Impeller Skid Unit 650l Step Tank		The Single Impeller Skid Unit is a dependable water solution for fire protection and water transfer with a 30m delivery hose. Best suited for a medium volume application.	Davey 5/8" Single Stage Firefighter	500lpm	7 Bar	Honda GX160	5.5hp	650L Plastic Step Tank	N.A.	5m/40mm	3 outlets (hose reel incl.)	30m	Drag Line SABS 10 bar	<=20m	Able to switch between applications while engine is running	German AWG mini jet/spray nozzle
Economy Skid Unit: Low Pressure		The Low Pressure Economy Skid Unit has a suction hose and strainer of 5 meter with an excellent spray reach of 18 meter.	ZB50	416lpm	2.5 Bar	Akira	5.5hp	500L Plastic T-style Tank	N.A.	5m/ 40mm	1 hose outlet	10m	Drag line SABS 10 bar	<=18m	Able to switch between applications while engine is running	Chinese Mini Jet Spray Nozzle
Economy Skid Unit: High Pressure		The High Pressure Economy Skid Unit weighs only 65kg and has an automatic unloader valve that regulates pressure.	Ruby TR-22AG	17-20lpm	35 Bar	Honda GX160	5.5hp	500L Plastic T-style Tank	N.A.	N.A.	2 Hose outlets max	10m	Hydraulic Hose	<=7m	Pump can run dry without damaging seals	High pressure trigger gun

				
Metal Drip Torch	Plastic Drip Torch	Collapsible fire fighting knapsack	Rake hoe, handle included.	Fire Beater
				
Forester Fire Hose	Poly-Z Fire Hose	Value Range	Honda Firefighter Remote Start	Knapsack Complete



Depend on Davey

DAVEY WATER PRODUCTS

Davey manufactures and distributes a comprehensive range of products for water transfer, conservation, treatment and filtration. With a strong engineering capability Davey develops and markets leading water products for homes, businesses and farms, fire and flood protection, rainwater harvesting, swimming pool and community needs.

SAFEQUIP IS AN AUTHORIZED DAVEY DISTRIBUTOR

ENGINE DRIVEN PUMPS

		
Davey Single Stage with Honda GX160 engine	Davey Twin Stage with Honda GX160\390 engine	Honda Firefighter Remote Start and GX390

HOUSEHOLD PRESSURE SYSTEMS


				
JY SERIES Economical single-stage jet assisted pump for high pressure homes. Self-priming for easy installation.	CY SERIES Robust, compact, single-stage pump for medium to large homes.	HS SERIES Low power consumption, quiet and compact for high pressure domestic application.	HM SERIES All stainless steel high pressure system for large multi level homes.	Torrium®2 An intelligent controller designed to supply pressure boosted water with constant flow and even water pressure to domestic households.

SUBMERSIBLE PUMPS

					
Dewatering Pumps Popular centrifugal dewatering pumps.	Vortex Pumps Solids handling for light slurries and soft solids in suspension. Stainless steel.	Waste water Pumps High head single channel sewage handling submersible sump pumps with cutting impeller.	Grey Water Double Casing Sump Pumps Stainless steel shell, double cased submersible dewatering pump.	Industrial Pumps KZN Range Heavy-duty, top discharge for very dirty water and farm wastes.	HP Submersible Rainwater harvesting range Two and three impeller designs for higher pressures up to 45m head.

OTHER

						
SureFlo Pool Pump Economic compact pump for smaller pools.	Silensor Pool Pump The quietest pool pump with extra large leaf basket for smaller pools.	Acquasafe® A tasteless, odourless, chlorine free liquid designed specifically for tankwater treatment.	DYNAFLO 6000 Economical single impeller pumps for farm and commercial washdown, spear points, water transfer and irrigations systems.	Rainbank® A mains/tank water interconnection device sourcing rainwater as a priority with mains as a back up.	Mukmova Farm Effluent Pumps Robust, single stage, open impeller, self-priming specifically designed for pumping liquids with solids in suspension.	VM Series Vertical Multistage Pumps Pumping of clean, non-aggressive liquids, free of fibers in suspension.

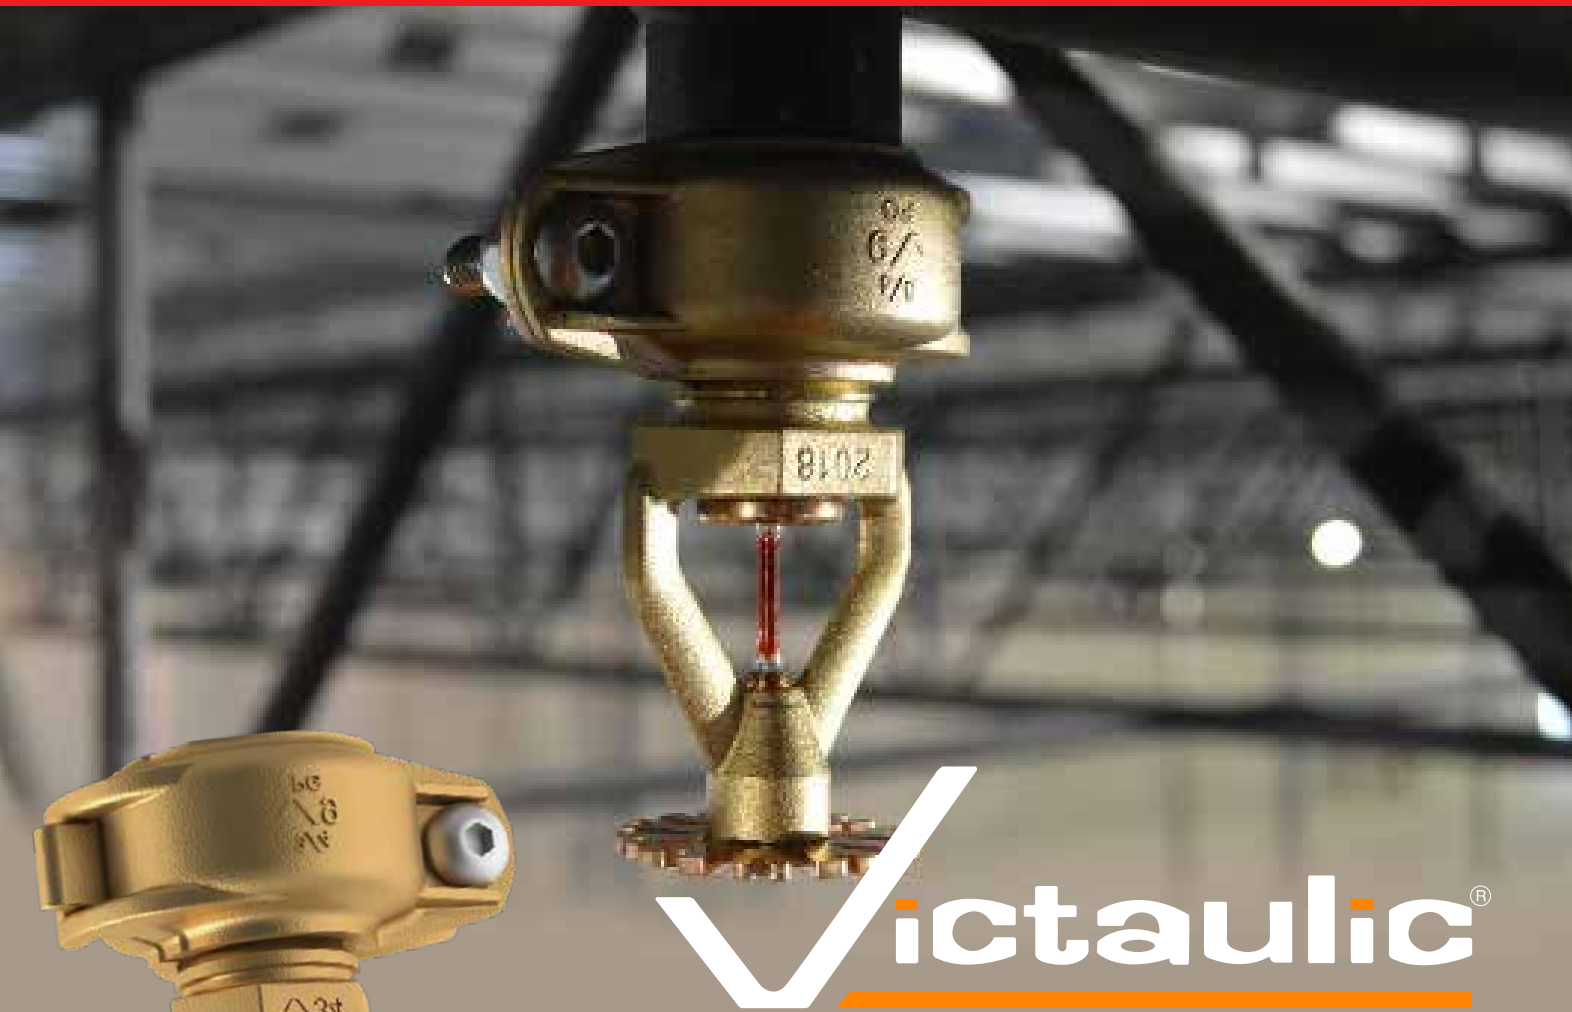


SPRINKLERS & ACCESSORIES

FIRE PROTECTION PRODUCTS & SYSTEMS

Providing ground-breaking fire protection products and system solutions for challenges faced by engineers, contractors, property managers and fire marshals. Victaulic is a leading fire protection manufacturer of innovative fire products and fire fighting systems including fire sprinklers, fire extinguishing and fire suppression systems, pipe couplings and fittings, and flow control valves. These products are used in commercial, infrastructure and industrial applications to protect people and property.

Our innovative fire protection systems and products put people to work faster, ensure reliability and are built to last.

SAFEQUIP IS AN AUTHORIZED VICTAULIC DISTRIBUTOR

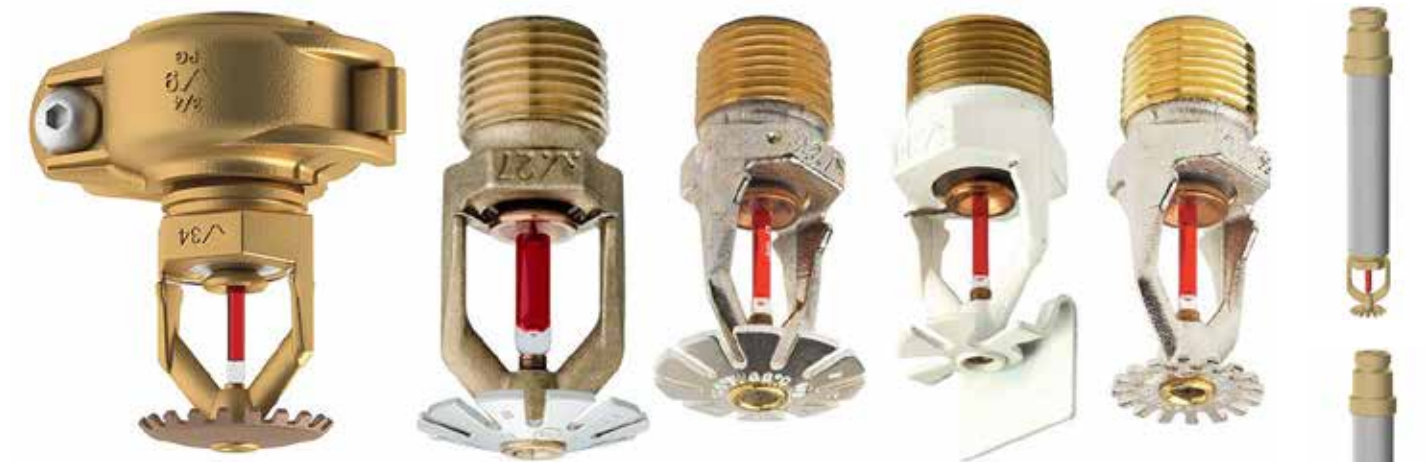

SPRINKLERS | DRY DROPPER

Sprinkler, QR, Pendent, K5.6(80), 15mm, 68C, 93C, 141C (Brass, Chrome, White)

Sprinkler, QR, Upright, K5.6(80), 15mm, 68C, 79C, 93C, 141C, Brass

Sprinkler, QR, Conven, K5.6(80), 15mm, 20mm, 68C, 93C, 141C, Brass

Sprinkler, SR, Pendent, K5.6(80), 15mm, 68C, 79C, 86C, 93C, 141C, (Brass, Chrome, White)

Sprinkler, SR, Upright, K5.6 (80), K8.0(115) 15mm, 20mm, 68C, 79C, 93C, 141C, Brass

Sprinkler, SR, Conven, K5.6(80), K8.0(115) 141C, 15mm, 20mm, 68C, 79C, 93C, 141C Brass

SPRINKLER ACCESSORIES

Eschutcheon, Recessed, 1Pc, 15mm, White

Eschutcheon, Recessed, 2Pc, 15mm, White




Wrench, Sprinkler, 15mm

Guard Shield, 15mm, Chrome (Guard and Shield)

Guard, 15mm, Chrome (Guard only)

Shield, 15mm, Chrome (Shield only)

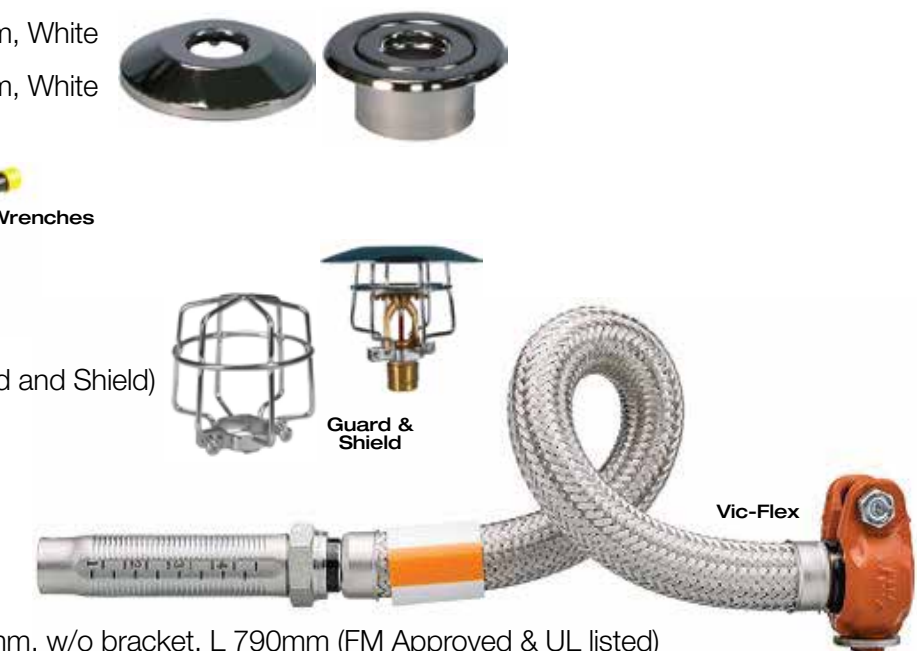

Vic-Flex AH2 braided hose, 15mm, w/o bracket, L 790mm (FM Approved & UL listed)

Vic-Flex AH2 braided hose, 15mm, w/o bracket, L 1220mm (FM Approved & UL listed)

Vic-Flex AH2 braided hose, 15mm, w/o bracket, L 1525mm (FM Approved & UL listed)

Viv-Flex AB1 adjustable bracket assembly

Vic-Flex AH3 braided hose, 15mm, w/o bracket, L 790mm (FM Approved & UL listed)

Vic-Flex AH3 braided hose, 15mm, w/o bracket, L 1220mm (FM Approved & UL listed)

VALVES

Valve, Alarm Check, 80mm, Model H1, GxG (Fully Factory trimmed)

Valve, Alarm Check, 100mm, Model H2, GxG (Fully Factory trimmed)

Valve, Alarm Check, 150mm, Model H2, GxG (Fully Factory trimmed)

Valve, Alarm Check, 200mm, Model H2, GxG (Fully Factory trimmed)



Alarm Check Valve

VALVES ACCESSORIES

Victaulic Service Kit, Cover Gasket, Alarm Check Valve, 80mm

Victaulic Service Kit, Rubber Disc, Alarm Check Valve, 80mm

Victaulic Service Kit, Cover Gasket, Alarm Check Valve, 100mm

Victaulic Service Kit, Rubber Disc, Alarm Check Valve, 100mm

Victaulic Service Kit, Cover Gasket, Alarm Check Valve, 150mm

Victaulic Service Kit, Rubber Disc, Alarm Check Valve, 150mm

Victaulic Service Kit, Cover Gasket, Alarm Check Valve, 200mm

Victaulic Service Kit, Rubber Disc, Alarm Check Valve, 200mm

Gong, Water Motor, Model WM

Flow Switch, VSR, Potter, 50mm, VSR2

Flow Switch, VSR, Potter, 80mm, VSR3

Flow Switch, VSR, Potter, 100mm, VSR4

Flow Switch, VSR, Potter, 150mm, VSR6

Flow Switch, VSR, Potter, 200mm, VSR8

Potter Flow Switch



Gong / Water Alarm



Butterfly Valve, Grooved End, 80mm, Model GLR300G

Butterfly Valve, Grooved End, 100mm, Model GLR300G

Butterfly Valve, Grooved End, 150mm, Model GLR300G

Butterfly Valve, Grooved End, 200mm, Model GLR300G

Tags, ASIB Overhaul (Globe)

Tags, ASIB Overhaul (Victaulic)




Butterfly Valve

VALVES & ACCESSORIES

FIRE PROTECTION PRODUCTS & SYSTEMS

Since 1919, Victaulic® has been committed to innovation in the pursuit of faster and easier ways to join piping systems. Specifically within the Fire Protection industry, Victaulic continues to simplify the installation process by reducing individual pieces and parts by engineering unique products that serve multiple functions and have smaller footprints. Evidence of this practice can be seen in the FireLock™ Commercial Zone Control Riser Module (Series 747M) and the Alarm Test Module.

SAFEQUIP IS AN AUTHORIZED VICTAULIC DISTRIBUTOR

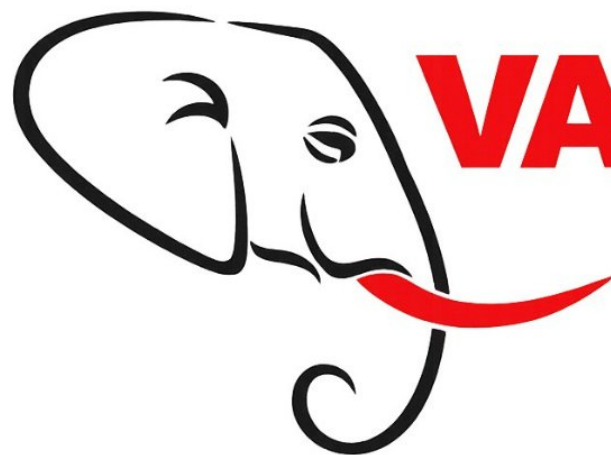

VANDLOVU
Group



SALES1@VANDLOVU.CO.ZA
PPESALES@VANDLOVU.CO.ZA
SALES2@VANDLOVU.CO.ZA



015 781 7801



4 NYALA STREET
PHALABORWA
1390

ENQUIRE NOW