

EXTERIOR

PROTECTIVE & SECURITY FILM

CLEAR 4 XC G

Anti-Graffiti - Long term — Exterior Application, Transparent From Outside

Clear 4 XC G solvent resistant films provide highly effective protection against tags and graffiti. Its protective qualities are not limited to solvents, it will also shield a window's surface from other acts of vandalism involving scratching or acid etching. An easy film to install and replace, it is also classed as a security film, providing protection by holding shattered glass in place in the event of an explosion or serious impact.

- Rejects 17% of total solar energy for effective heat control
- Retains 91% visible light transmission
- Engineered and certified for professional exterior installation
- 99% UV rejection helps protect interiors and furnishings from fading
- Transparent finish keeps the glazing's original clarity intact

Key Strengths



99%

UV Rejection



91%

Visible Light
Transmission



17%

Total Solar Energy
Rejected



14%

Glare Reduction



9%


Visible Light Reflection
— External

Why Choose CLEAR 4 XC G?


Anti-Graffiti - Long term — engineered for professional exterior application.

ADVANTAGES

- Rejects 17% of total solar energy
- 99% UV protection
- 91% visible light transmission retained
- 14% glare reduction, improved visual comfort
- Transparent appearance preserves the facade
- Professional exterior installation

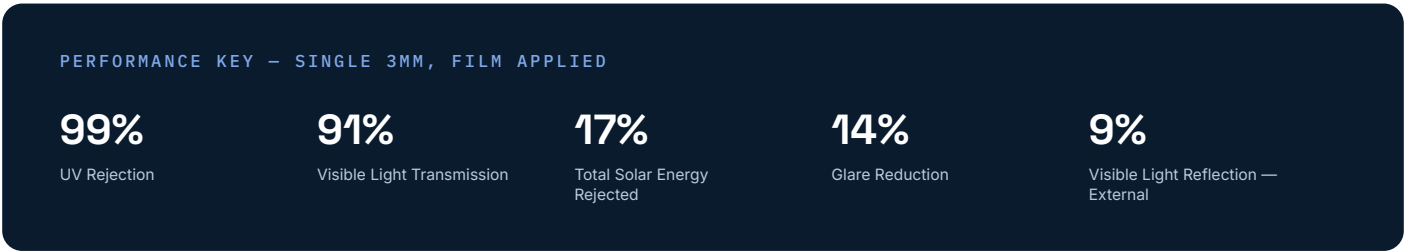

PERFORMANCE CHARTS — NO FILM VS. FILM APPLIED

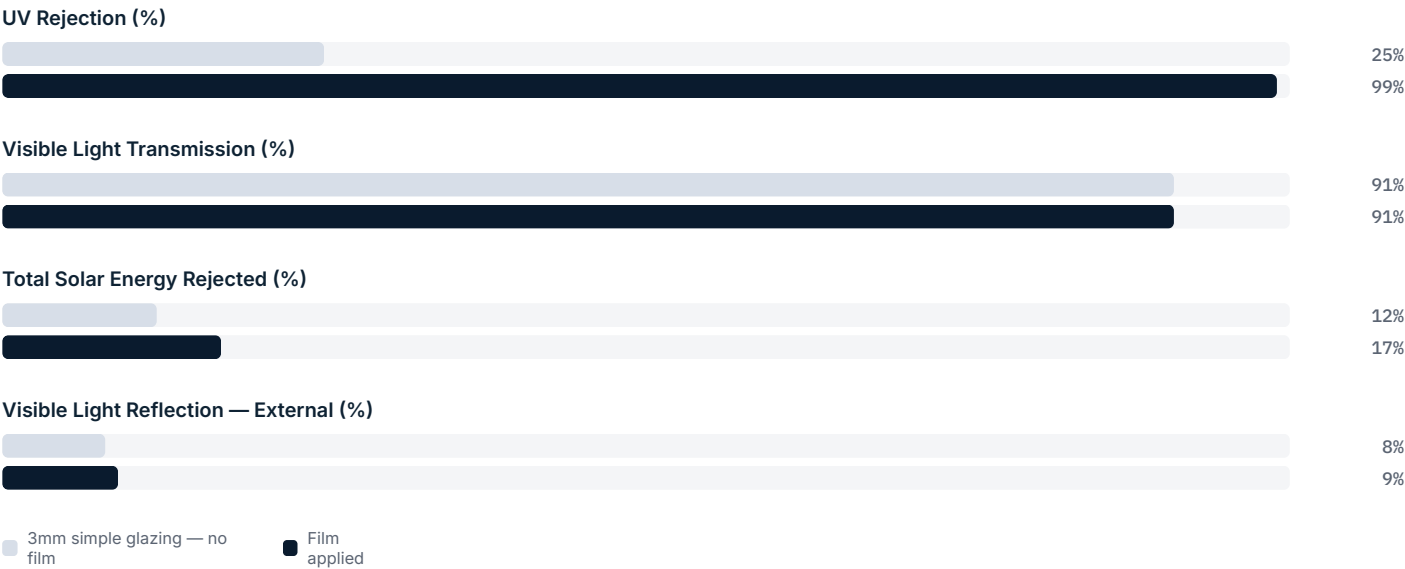

CHARACTERISTICS



Warranty
5 years



Storage (recommended conditions)
3 years



EN 12600
2B2



Installation Type
Exterior



Length
30.5 m



Fire Resistance Rating
M1



REACH / RoHS
Compliant



Widths Available
122 cm, 152 cm, 183 cm



Color From the Outside
Transparent



Product Carbon Footprint (LCA)
2.44 kgCO₂e/m²

CONSTRUCTION – PET, 125 µm

1. Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
2. High optical quality polyester
3. Bonding adhesive
4. High optical quality polyester
5. Half permanent adhesive that will ease the removal of the film from the window
6. Protection PET release liner, disposable after installation

MECHANICAL PROPERTIES



Tensile Force at Break
220 kg/cm



Elongation at Break
125%

OPTICAL & SOLAR PROPERTIES

PANE TYPE	SINGLE 3MM		DOUBLE LOW-E	
	NO FILM	WITH FILM	NO FILM	WITH FILM
UV Rejection (%)	25	99	40	99
Visible Light Transmission (%)	91	91	82	81
Visible Light Reflection — External (%)	8	9	11	10
Visible Light Reflection — Internal (%)	8	9	12	10
Solar Energy Reflection (%)	5	10	28	28
Solar Energy Absorption (%)	8	8	12	18
Solar Energy Transmission (%)	87	82	60	54
Total Solar Energy Rejected (%)	12	17	35	39
Infrared Rejection, 780–2500 nm (%)	—	—	—	—
Glare Reduction (%)	—	14	—	1
Shading Coefficient	—	0.90	—	0.94
g-value	0.88	0.83	0.65	0.61
U-value (W/m²·°C)	5.8	5.7	1.1	1.1

Values based on a study conducted on an air-conditioned building located in Luxembourg, film applied on a low-E double glazing facing East. Heating months are October to March, cooling months April to September, using an electric heat pump (efficiency 3.5) and electric cooling (efficiency 3). Data is not contractual — FNX | EVO reserves the right to modify product composition at any time; refer to our warranties and general sales conditions.

GLAZING RECOMMENDATIONS

Vertical situation, standard glazed surface up to 2.5 m².

Clear Single Pane	✓ Yes
Tinted Single Pane	✓ Yes
Reflective Tinted Single Pane	✓ Yes
Clear Double Pane	✓ Yes
Tinted Double Pane	✓ Yes
Reflective Tinted Double Pane	✓ Yes
Gas-Filled Double Pane - Low E	✓ Yes
Stadip Ext. Clear Double Pane	✓ Yes
Stadip Int. Clear Double Pane	✓ Yes

✓ Yes ! Caution × Not recommended

Advice based on glazed surface area up to 2.5 m² — contact us for confirmation or a thermal shock analysis on larger or atypical glazing.

INSTALLATION & MAINTENANCE

Safety film with reinforced PS adhesive, requiring a suitable application solution : Slide On (600-F02) or Film On (600-F0355) diluted at 2 cL/L of water, and a suitable safety squeegee (150-054 / 150-055 / 150-056). Do not clean for at least one month or apply stickers/adhesives to the film. Download the installation and maintenance advice



Learn more about FNX and our product catalog.



THERMAL COMFORT



UV PROTECTION



GLARE REDUCTION



ENERGY PERFORMANCE



SUPERIOR AESTHETICS



PROFESSIONAL INSTALL