


QUAD ATTENUATOR

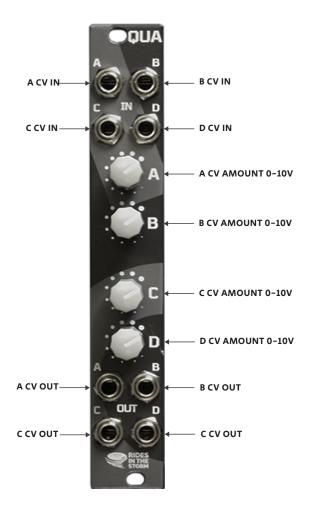

QUAD ATTENUATOR FOR CV AND AUDIO SIGNALS WITHOUT CV INPUT EACH CHANNEL GENERATES 0-10 VOLT HIGH QUALITY CIRCUITS FOR PRECISE RESULTS

IN THE CASE OF DISPOSAL, IT MUST BE ENSURED THAT ELECTRONIC WASTE HAS TO BE GIVEN TO THE RESPONSIBLE RECYCLING CENTERS. INFORMATION IS PROVIDED BY THE LOCAL WASTE DISPOSAL COMPANY OF THE CITY OR MUNICIPALITY.

POWER CONSUMPTION: +V rail: +10 mA -V rail: -10 mA MODULE WIDTH: 4 HP



