




U82C4x400

Power Line EMI Filter

1. Dimensions

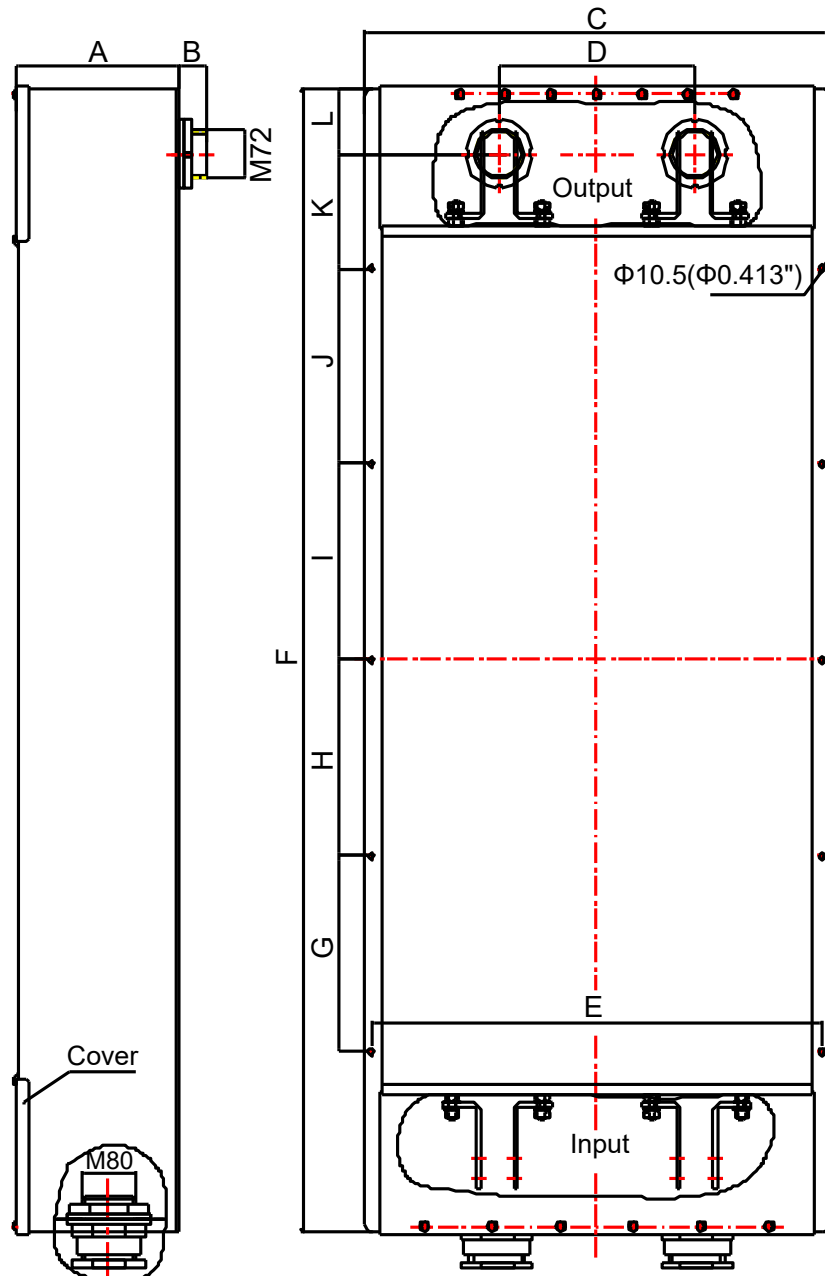

	A	B	C	D	E	F	G	H	I	J	K	L
mm	215	45	710	300	693	1750	300	300	300	300	175	100
Inch	8.46	1.77	27.95	11.81	27.28	68.90	11.81	11.81	11.81	11.81	6.89	3.94


Tolerance: $\pm 0.02\text{in}$ / $\pm 0.5\text{mm}$



2. Specifications

Rated Voltage	480VAC/277VAC
Operating Frequency	0-60Hz
Rated Current	4x400A
Leakage Current	3.9A (@250VAC,50Hz)
Insertion Loss	100dB, 14kHz-40GHz
Shielding Effectiveness	100dB, 14kHz-40GHz
Climatic Category	25/085/21

3. Typical Insertion Loss Performance Curve (acc. to MIL-STD-220)

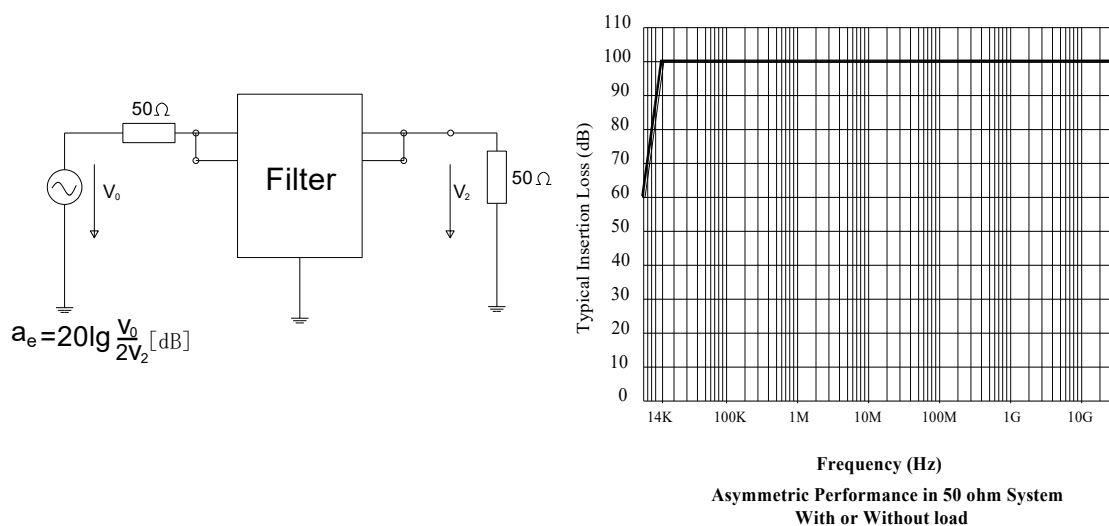

4. Accessories List

- ① M72 Conduit Screw: 2pc
- ② Gasket 72: 2pc
- ③ M72 Screw Nut: 2pc
- ④ Cable Gland M80: 2pc
- ⑤ Certificate: 1pc

[illegible]