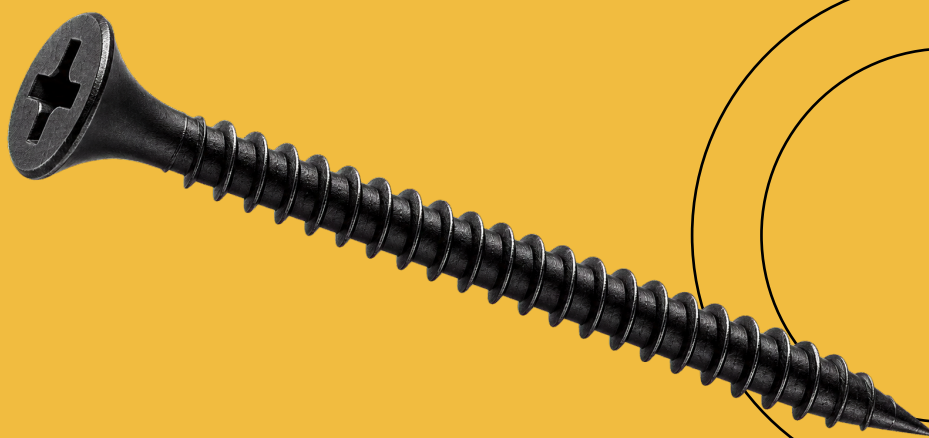


01 / PRODUCT PROFILE

Black Zinc Drywall Screws

Black zinc drywall screws engineered for dependable grip, controlled seating and consistent performance in compatible interior drywall systems.

**MATERIAL****Mild carbon steel****DRIVE****Phillips****HEAD****Bugle head****FINISH****Black zinc**

Size combinations

Nominal diameter and length options currently used for the Screwbee product range.

01

3.5 mm

AVAILABLE LENGTHS

16, 19, 25, 32, 38, 50 mm

02

4.2 mm

AVAILABLE LENGTHS

19, 25, 32, 38, 50, 60 mm

03

4.8 mm

AVAILABLE LENGTHS

50, 60 mm

PRODUCT GEOMETRY

HEAD PROFILE

Phillips bugle head

THREAD

Fine or coarse thread, subject to selected variant

POINT

Sharp gimlet point

COATING

Black zinc finish

TECHNICAL NOTE

Confirm the exact size, thread type, applicable standard, packaging and inspection requirement against the approved quotation or product drawing before ordering.

Built for interior fixing.

01 Gypsum-board installation

02 Plasterboard fixing

03 Interior partition systems

04 Wood-stud framing

BUYER CHECKLIST

- Nominal diameter x length
- Fine or coarse thread
- Required quantity and packing
- Applicable drawing or standard
- Inspection and documentation needs

REQUEST TECHNICAL DOCUMENTATION

Contact Screwbee to request the current approved product drawing, inspection documentation and commercial quotation for your selected Black Zinc Drywall Screw variant.

SCREWBEE / TURN - TIGHT - TRUST