

INTERIOR

SOLAR CONTROL • ARCHITECTURAL FILM

MULTIGLASS 66 C

Transparent Solar Control Film — Interior Application, Transparent From Outside • Multi Alloy

With a highly specific multi alloy metal composition, the Multiglass 66 C film constitutes a significant barrier to solar absorption. It is highly effective in shielding against solar heat gain and further protects glazed surfaces from damage.

- Rejects 67% of total solar energy for effective heat control
- Retains 44% visible light transmission
- Engineered and certified for professional interior installation
- 99% UV rejection helps protect interiors and furnishings from fading
- Transparent finish keeps the glazing's original clarity intact

Key Strengths



99%

UV Rejection



44%

Visible Light
Transmission



67%

Total Solar Energy
Rejected



52%

Glare Reduction



52%


Visible Light Reflection
— External

Why Choose MULTIGLASS 66 C?


A transparent solar control film that cuts solar heat gain and glare while keeping the glazing's original clarity.

ADVANTAGES

- Rejects 67% of total solar energy
- 99% UV protection
- 44% visible light transmission retained
- 52% glare reduction, improved visual comfort
- Transparent appearance preserves the facade
- Professional interior installation

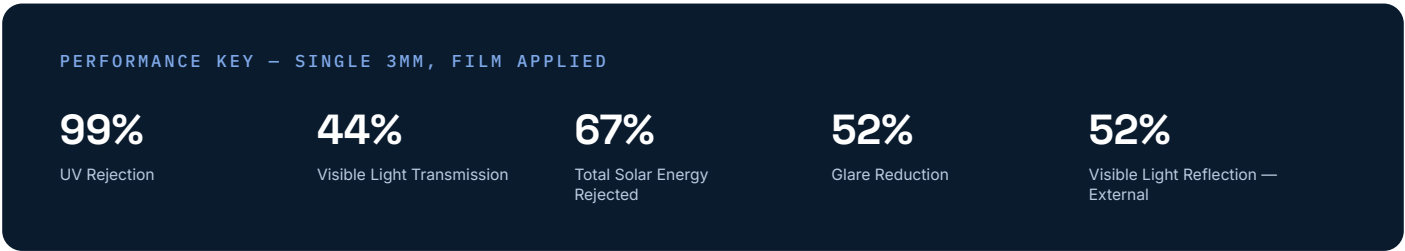

PERFORMANCE CHARTS — NO FILM VS. FILM APPLIED

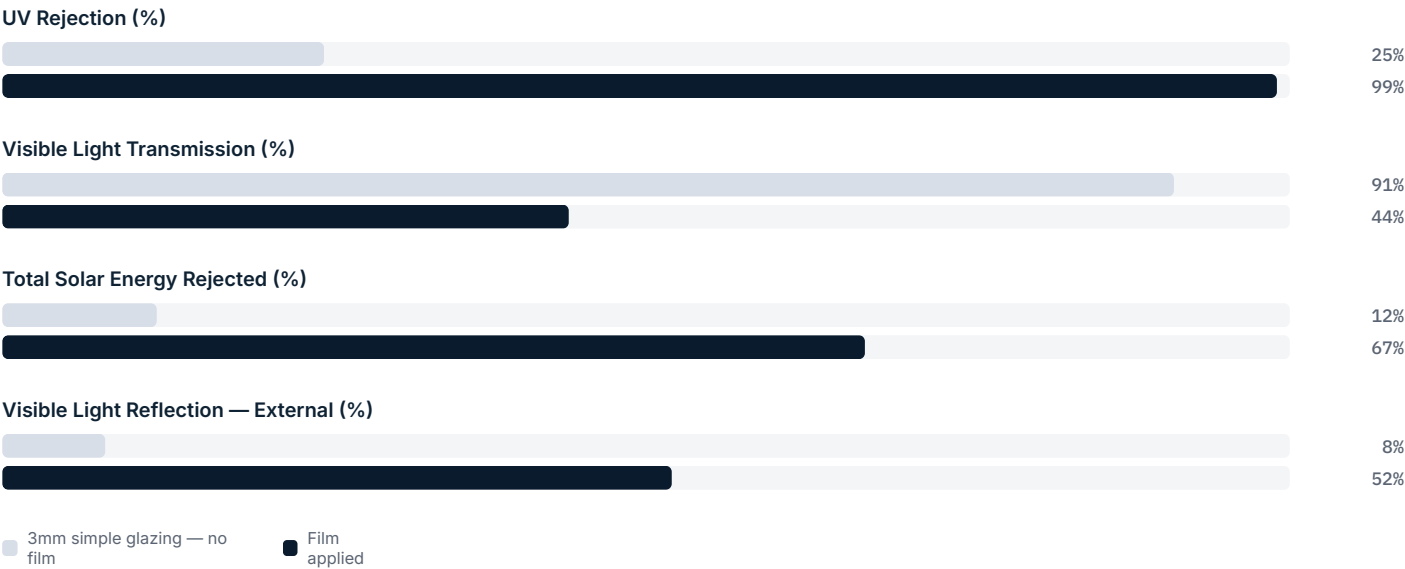

CHARACTERISTICS



Warranty
10 years



Fire Resistance Rating
M1



Storage (recommended conditions)
3 years



REACH / RoHS
Compliant



Widths Available
122 cm, 152 cm



Installation Type
Interior



Color From the Outside
Champagne



Length
30.5 m



Product Carbon Footprint (LCA)
1.34 kgCO₂e/m²

CONSTRUCTION – PET, 55 µm

1. Scratch-resistant hard coating providing surface protection, durability, and ease of cleaning
2. High optical quality polyester, with an IR-blocking metallic particle coating
3. Bonding adhesive
4. High optical quality polyester
5. PS adhesive, polymerizes with glass within 15 days
6. Protection PET release liner, disposable after installation

ENERGY & ENVIRONMENTAL BENEFITS



Energy Savings
32.7 kWh/m²/yr



Carbon Footprint Reduction
10.3 kgCO₂/m²



Financial Savings
8 €/m²/yr

OPTICAL & SOLAR PROPERTIES

PANE TYPE	SINGLE 3MM		DOUBLE LOW-E	
	NO FILM	WITH FILM	NO FILM	WITH FILM
UV Rejection (%)	25	99	40	99
Visible Light Transmission (%)	91	44	82	40
Visible Light Reflection — External (%)	8	52	11	47
Visible Light Reflection — Internal (%)	8	53	12	53
Solar Energy Reflection (%)	5	57	28	50
Solar Energy Absorption (%)	8	14	12	25
Solar Energy Transmission (%)	87	30	60	25
Total Solar Energy Rejected (%)	12	67	35	61
Infrared Rejection, 780–2500 nm (%)	16	87	16	90
Glare Reduction (%)	—	52	—	51
Shading Coefficient	—	0.38	—	0.44
g-value	0.88	0.33	0.65	0.39
U-value (W/m²·°C)	5.8	5.2	1.1	1.1

Values based on a study conducted on an air-conditioned building located in Luxembourg, film applied on a low-E double glazing facing East. Heating months are October to March, cooling months April to September, using an electric heat pump (efficiency 3.5) and electric cooling (efficiency 3). Data is not contractual — FNX | EVO reserves the right to modify product composition at any time; refer to our warranties and general sales conditions.

GLAZING RECOMMENDATIONS

Vertical situation, standard glazed surface up to 2.5 m².

Clear Single Pane	✓ Yes
Tinted Single Pane	✓ Yes
Reflective Tinted Single Pane	✓ Yes
Clear Double Pane	✓ Yes
Tinted Double Pane	✓ Yes
Reflective Tinted Double Pane	✓ Yes
Gas-Filled Double Pane - Low E	✓ Yes
Stadip Ext. Clear Double Pane	✓ Yes
Stadip Int. Clear Double Pane	! Caution

✓ Yes ! Caution × Not recommended

Advice based on glazed surface area up to 2.5 m² — contact us for confirmation or a thermal shock analysis on larger or atypical glazing.

INSTALLATION & MAINTENANCE

Use Slide On (600-FO2) or Film On (600-F0355) diluted at 2 cL/L of water for installation and cleaning. Do not clean for one month after installation or apply stickers/adhesives on the film. It is essential to apply our sealing varnish (ref. 600-3950) to the edges of the film after installation to prevent oxidation of the metal alloys.



Learn more about FNX and our product catalog.



THERMAL COMFORT



UV PROTECTION



GLARE REDUCTION



ENERGY PERFORMANCE



SUPERIOR AESTHETICS



PROFESSIONAL INSTALL