




U82C2x32

Power Line EMI Filter

1. Dimensions

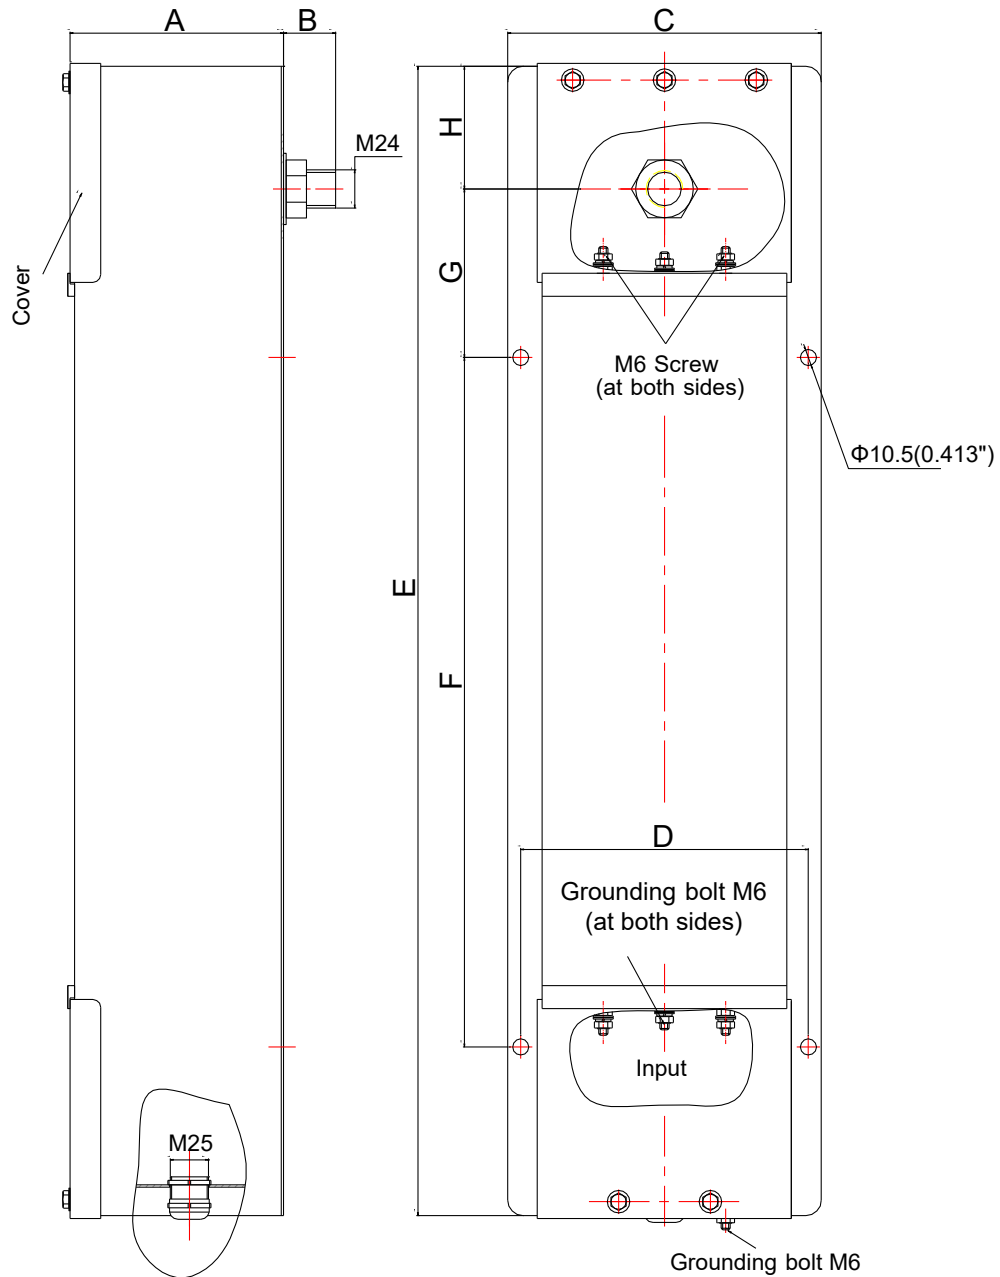

	A	B	C	D	E	F	G	H
mm	120	45	205	188	750	450	110	80
Inch	4.72	1.77	8.07	7.40	29.53	17.72	4.33	3.15


Tolerance: $\pm 0.02\text{in}$ / $\pm 0.5\text{mm}$



2. Specifications

Rated Voltage	277VAC/500VDC
Operating Frequency	0-60Hz
Rated Current	2x32A
Leakage Current	5.1A (@250VAC,50Hz)
Insertion Loss	100dB, 14kHz-40GHz
Shielding Effectiveness	100dB, 14kHz-40GHz
Climatic Category	25/085/21

3. Typical Insertion Loss Performance Curve (acc. to MIL-STD-220)

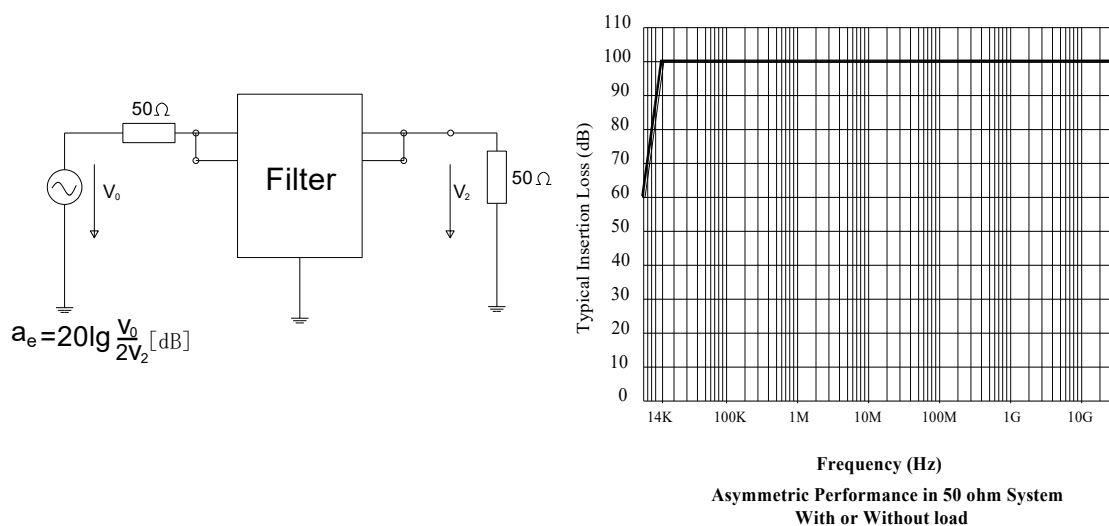

4. Accessories List

- ① M24 Conduit Screw: 1pc
- ② Gasket 24: 1pc
- ③ M24 Screw Nut: 1pc
- ④ EMI Gasket 24: 1pc
- ⑤ Cable Gland M25: 1pc
- ⑥ Certificate: 1pc



5. Installation Diagram

