

WIZPLUS



Electric Scissor Lift Platform (Hydraulic Drive Hydraulic Steering)

Model: CKJC-HD Series

Standard Models Available in Stock	Ships in 20-30 Days	FCL Sea Freight Preferred
------------------------------------	---------------------	---------------------------

The CKJC Series Hydraulic Drive Electric Scissor Lift delivers 8–16 m working heights for demanding construction and maintenance applications. Featuring a 320 kg capacity, 900 mm extension deck, full-height drive capability, and zero-emission electric hydraulic system, it provides reliable performance, lower maintenance, and enhanced safety for both indoor and outdoor jobsites.

VOLTAGE

24V DC

BATTERY

4*6V 200Ah

HYDRAULIC TANK

8 L

HYDRAULIC LIFT MOTOR

24V/3.0KW

CHARGER

24V 30A


STANDARDS & CERTIFICATIONS

CE	ANSI	ISO 9001 QMS
----	------	--------------

Dimensions

	CKJC0806HDA	CKJC0806HD	CKJC1008HDA	CKJC1210HD
Safe working load (kg)	230	320	230	320
Maximum number of passengers	2	2	2	2
Maximum allowable manual force (N)	200	200	200	200
Extension platform load (kg)	113	113	113	113
Maximum allow able machine tilt	1.5°/3°	1.5°/3°	1.5°/3°	1.5°/3°
Rise and fall time (s)	20-25	25-30	30-36	32-37
Maximum travel speed(lowered/raised) (km/h)	4.0/0.5	4.0/0.5	4.0/0.5	4.0/0.5
Climbing ability (%)	25	25	25	25
Minimum ground clearance (mm)	100	100	100	100
Machine weight (kg)	1450	2000	2025	2350

WIZPLUS

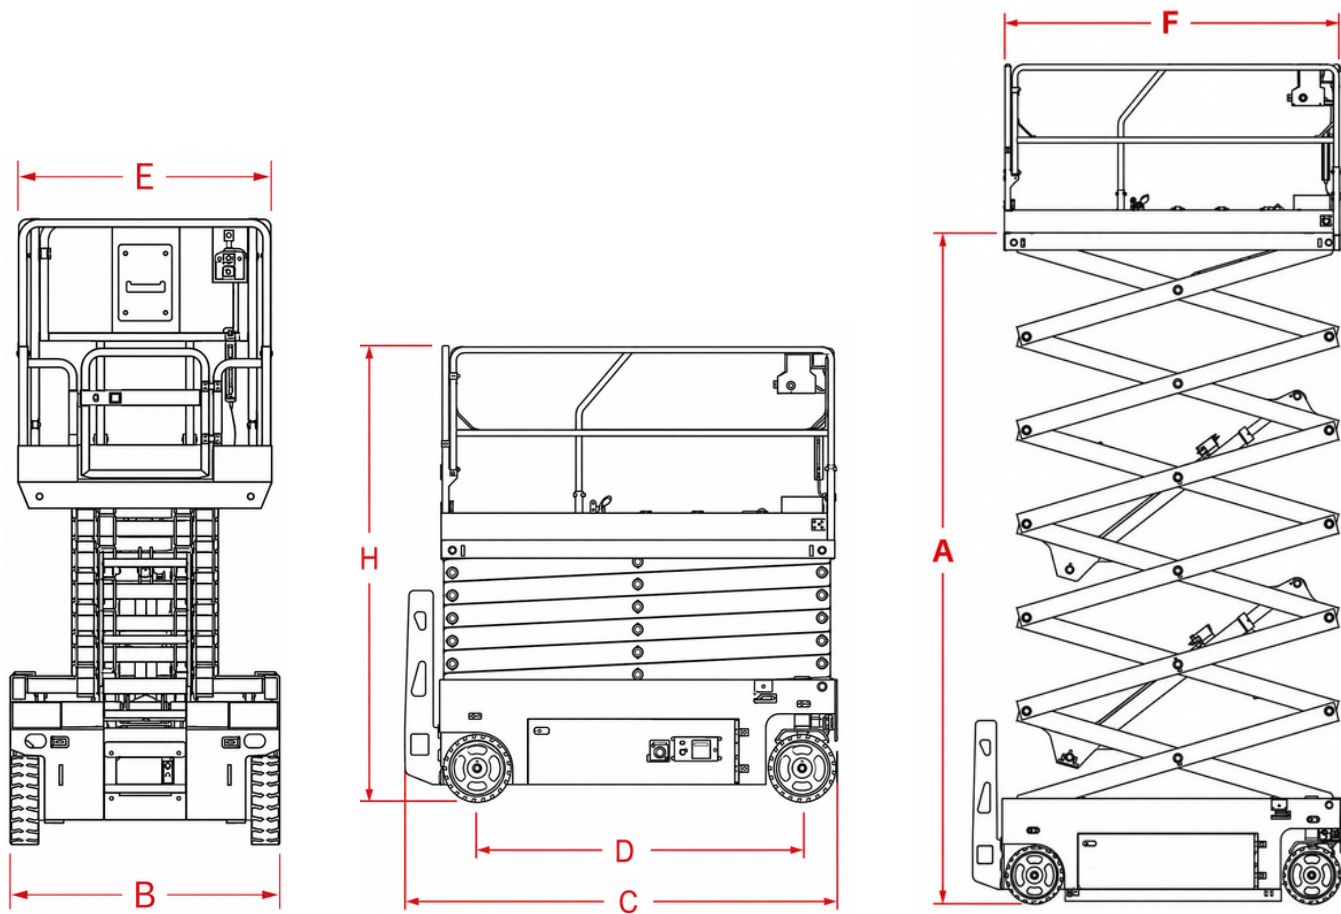

SPECIFICATIONS

Maximum Working Height (mm)	8000-15800
Maximum Platform Height (mm)	A 5800-13800
Overall length (including pedals) (mm)	C 1910-2650
Overall length (excluding pedals) (mm)	1710-2450
Overall Height (mm)	H 2120-2560

Platform Length (mm)	F 1730-2540
Platform Width (mm)	E 740-1120
Wheelbase (mm)	D 1850-2240
Machine weight (kg)	1450-3380
Extended table length (mm)	900

WIZPLUS

Feature 01

Responsive Platform Joystick Control

The ergonomic joystick controller integrates function switches, status indicators and an emergency stop button for precise, responsive and safe platform operation.



Feature 02

Smooth and Stable Mobility

The wear-resistant solid wheel provides reliable traction and smooth movement while helping protect indoor floors from marks and damage.



Feature 03

Reinforced Safety Guardrail

The full-height steel guardrail features a reinforced structure and secure access gate, providing reliable protection and a safer elevated working environment.



Feature 04

Smooth and Flexible Mobilit

The heavy-duty swivel casters provide smooth movement and flexible steering, allowing the equipment to be easily repositioned in narrow or confined working areas.

