

WIZPLUS



Self-Propelled Order Picker

Model: OPC Series

Standard Models Available in Stock	Ships in 20-30 Days	FCL Sea Freight Preferred
------------------------------------	---------------------	---------------------------

Handling high-frequency picking/replenishment tasks while also supporting elevated maintenance work (lighting, signage, etc.), boosting overall efficiency in warehouse and commercial spaces.

VOLTAGE	LIFT MOTOR
24V DC	24V 0.8KW
DRIVE WHEEL MOTOR	BATTERY
0.5KW	2*12V 100Ah
CHARGER	HYDRAULIC TANK
24V 15A	3 L


STANDARDS & CERTIFICATIONS

CE	ANSI	ISO 9001 QMS
----	------	--------------

Dimensions

	OPC-03	OPC-04
Standing platform load (kg)	136	136
Grid storage table load (kg)	90	90
Carrying deck load (kg)	110	110
Standing platform ascentand descent time (s)	12-18	16-24
Maximum allow able machine tilt	1.5°/2°	1.5°/2°
Grid storage platform riseand fall time (s)	21-26	21-26
Minimum height of storage table (mm)	1010	1210
Maximum lifting height of storage platform (mm)	1490	1690
Machine weight (kg)	800	850
Ground clearance (mm)	12	12
Height of standing platform from ground (mm)	335	535
Height of carrying deck from ground (mm)	530	530

WIZPLUS

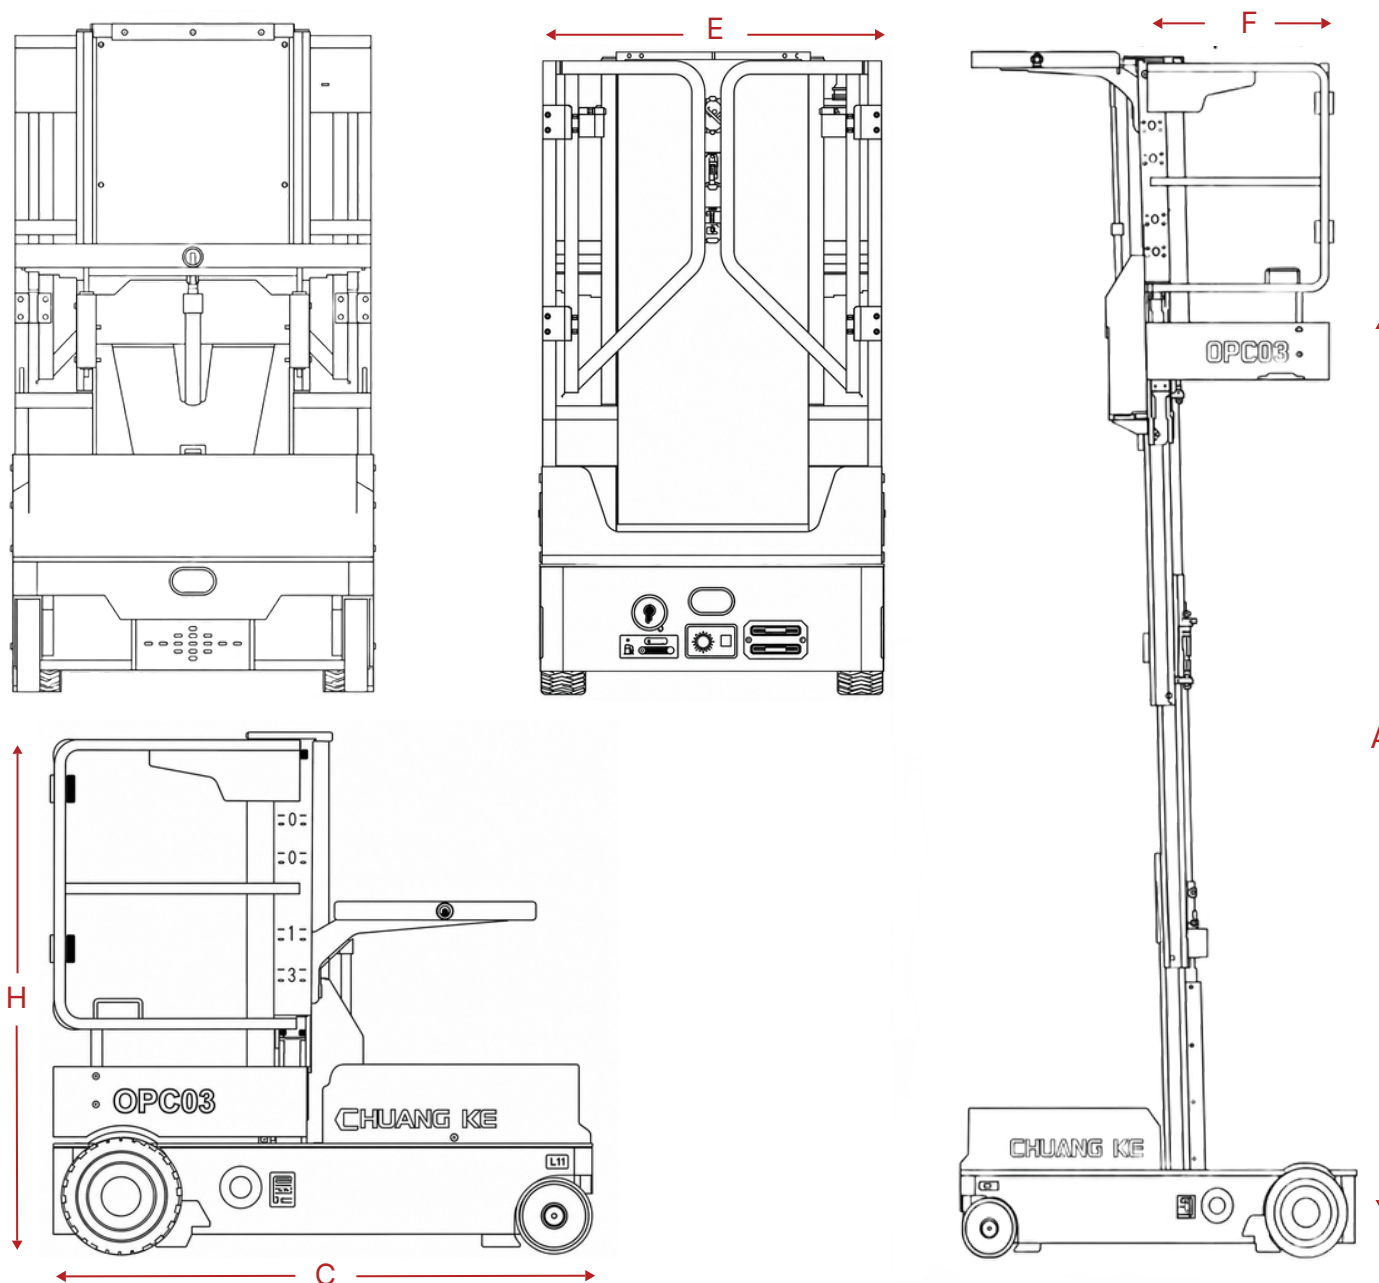

SPECIFICATIONS

Maximum Working Height (mm) **5000-6000**

Maximum Platform Height (mm) **A 3000-4000**

Overall Length (mm) **C 1475**

Overall Width (mm) **1475**

Overall Height (mm) **1475**

Standing Platform Length (mm) **F 755**

Standing Platform Width (mm) **E 690**

Grid Storage Length (mm) **745**

Grid Storage Width (mm) **560**

Carrying Deck Length (mm) **670**

WIZPLUS

Feature 01

Joystick Control

Ergonomic joystick enables smooth, precise movement and easy operation from the platform.



Feature 02

Load Tray


Tray provides practical storage space for tools, packages, and order-picking materials.



Feature 03

Platform Control Panel

Integrated controls provide convenient operation, clear status monitoring, and quick emergency stopping.

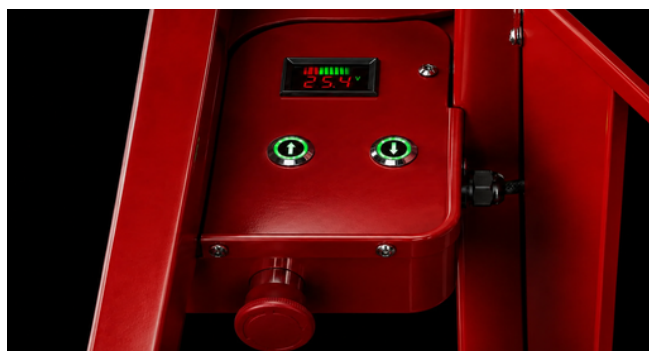

Feature 04

Blue Safety Light

Bright blue warning light improves machine visibility and alerts nearby personnel during operation.



Information Required for Product Selection



REQUIRED WORKING HEIGHT



REQUIRED LOAD CAPACITY



INDOOR OR OUTDOOR USE



AVAILABLE OPERATING SPACE



REQUIRED QUANTITY



DESTINATION COUNTRY