


# Specifications

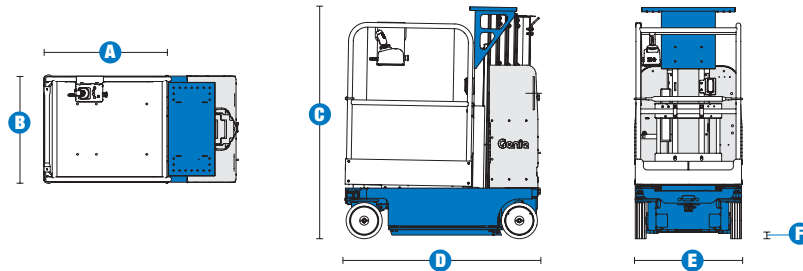

MODELS	GR™-12		GR™-15		GR™-20	
	Metric	US	Metric	US	Metric	US
Working height*	5.48 m	17 ft 5 in	6.47 m	20 ft 8 in	8.07 m	25 ft 11 in
Platform height	3.48 m	11 ft 5 in	4.47 m	14 ft 8 in	6.07 m	19 ft 11 in
<b>A B</b> Platform dimensions (l x w)						
Standard	0.88 x 0.75 m	35 x 29.5 in	0.88 x 0.75 m	35 x 29.5 in	0.88 x 0.75 m	35 x 29.5 in
Standard with extension	1.4 x 0.75 m	55 x 29.5 in	1.4 x 0.75 m	55 x 29.5 in	1.4 x 0.75 m	55 x 29.5 in
Stock picker	0.88 x 0.73 m	35 x 28.75 in	0.88 x 0.73 m	35 x 28.75 in	0.88 x 0.73 m	35 x 28.75 in
Stock picker w/adjustable tray	1.4 x 0.73 m	56 x 28.75 in	1.4 x 0.73 m	56 x 28.75 in	1.4 x 0.73 m	56 x 28.75 in
Standard AWP	0.69 x 0.51 m	27 x 26 in	0.69 x 0.51 m	27 x 26 in	0.69 x 0.51 m	27 x 26 in
Narrow AWP	0.66 x 0.51 m	26 x 20 in	0.66 x 0.51 m	26 x 20 in	0.66 x 0.51 m	26 x 20 in
Standard fibreglass	0.74 x 0.67 m	29 x 26.5 in	0.74 x 0.67 m	29 x 26.5 in	0.74 x 0.67 m	29 x 26.5 in
Narrow fibreglass	0.66 x 0.56 m	26 x 22 in	0.66 x 0.56 m	26 x 22 in	0.66 x 0.56 m	26 x 22 in
<b>C</b> Height - stowed	1.57 m	5 ft 2 in	1.57 m	5 ft 2 in	1.98 m	6 ft 6 in
<b>D</b> Length - stowed	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in
<b>E</b> Width	0.75 m	2 ft 5.5 in	0.75 m	2 ft 5.5 in	0.80 m	2 ft 7.5 in
<b>F</b> Ground clearance - centre	6 cm	2.5 in	6 cm	2.5 in	6 cm	2.5 in

PRODUCTIVITY						
Lift capacity	227 kg	500 lbs	227 kg	500 lbs	159 kg	350 lbs
Drive speed - stowed	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability**	30%	30%	30%	30%	30%	30%
Turning radius	zero	zero	zero	zero	zero	zero
Controls	24 V DC proportional		24 V DC proportional		24 V DC proportional	
Tyres	non-marking		non-marking		non-marking	

POWER						
Power source	24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity	8.33 L	2.2 gal	8.33 L	2.2 gal	8.33 L	2.2 gal

WEIGHT***						
	717 kg	1,581 lbs	994 kg	2,192 lbs	1,112 kg	2,451 lbs

STANDARDS COMPLIANCE	CE Compliance
----------------------	---------------

**4up** [www.4up.ro](http://www.4up.ro) [office@4up.ro](mailto:office@4up.ro) 0745888788 0752888588  
 Punct de lucru: Str. DE, nr. 138, sat Bătești, comuna Brazi

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.  
 \*\*\* Weight will vary depending on options and/or country standards.

## Features

### EASILY CONFIGURED TO MEET YOUR NEEDS

#### PLATFORM OPTIONS

- Standard platform
- Sliding mid-rail extension deck
- Gated extension deck
- Optional platform extension deck provides 51 cm (20 in) of horizontal outreach
- Stock Picker platform
- Stock Picker platform with adjustable tray
- Stock Picker platform with rear parcel tray (GR-12 and GR-15 only)
- Standard AWP platform
- Narrow AWP platform
- Standard AWP fibreglass platform
- Narrow AWP fibreglass platform

#### POWER

- 24 V (four 6 V 225 Ah batteries)

#### TYRE

- Non-marking solid tyres

### STANDARD FEATURES

#### MEASUREMENTS

##### GR™-12

- 5.48 m (17 ft 5 in) working height
- 3.48 m (11 ft 5 in) platform height
- Up to 227 kg (500 lb) lift capacity

##### GR™-15

- 6.47 m (20 ft 8 in) working height
- 4.47 m (14 ft 8 in) platform height
- Up to 227 kg (500 lb) lift capacity

##### GR™-20

- 8.07 m (25 ft 11 in) working height
- 6.07 m (19 ft 11 in) platform height
- Up to 159 kg (350 lb) lift capacity

#### PRODUCTIVITY

- Patented rigid mast system
- Compact base 0.75 m x 1.35 m (29.5 x 53 in)
- Standard sliding midrail platform 0.75 x 0.88 m (29.5 x 35 in)
- Low 0.38 m (15 in) platform entry height
- Adjustable work station tray
- Fully proportional lift and drive controls
- Onboard diagnostic system
- AC power to platform
- Descent and tilt alarm
- Auxiliary platform lowering
- Zero inside turning radius
- Dual wheel brakes

### STANDARD FEATURES cont.

#### PRODUCTIVITY cont.

- Hydraulic brake release
- Pothole protection
- Hinged rear covers for easy access to all major electrical and hydraulic components
- Large forklift pockets 6.3 x 13 cm (2.5 x 5.125 in)
- Tie down attachment points
- Non-marking solid tyres
- Fully certified load sensor

#### POWER

- Automatic 25 amp battery charger



### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Sliding mid-rail extension deck
- Gated extension deck
- Stock Picker platform with adjustable tray
- Stock Picker rear parcel tray (GR-12 and -15)
- Stock Picker bike rack
- Standard AWP platform
- Narrow AWP platform
- Standard AWP fibreglass platform
- Narrow AWP fibreglass platform
- Fluorescent tube caddy
- Motion alarm and flashing beacons
- Automotive horn

#### POWER

- 800 watt inverter (120-230 V AC/50-60 Hz)
- Maintenance-free batteries

### European Offices

#### UK

The Maltings  
Wharf Road  
Grantham NG31 6BH  
UK  
Tel: +44 (0)1476 584333  
Fax: +44 (0)1476 584334

#### France

10, ZA de la Croix St. Mathieu  
28320 Gallardon  
France  
Tel: +33 (0)2 37 26 09 99  
Fax: +33 (0)2 37 26 09 98

#### Germany

Finienweg 3  
28832 Achim/Bremen  
Germany  
Tel: +49 (0)4202 8852-0  
Fax: +49 (0)4202 8852-20

#### Spain

Gaià 31, Pol. Ind. Plà d'en Coll  
08110 Montcada i Reixac  
Barcelona  
Spain  
Tel: +34 93 572 50 90  
Fax: +34 93 572 50 91

#### Scandinavia

Tagenevägen 72  
425 37 Hisings Kärra  
Sweden  
Tel: +46 31 57 51 00  
Fax: +46 31 57 90 20

### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730  
USA  
Tel: +1 425 881-1800  
Fax: +1 425 883-3475

**WEB:** [www.genieindustries.com](http://www.genieindustries.com)  
**Email:** [infoeurope@genieind.com](mailto:infoeurope@genieind.com)

#### Distributed By: