




U82C2x400

Power Line EMI Filter

1. Dimensions

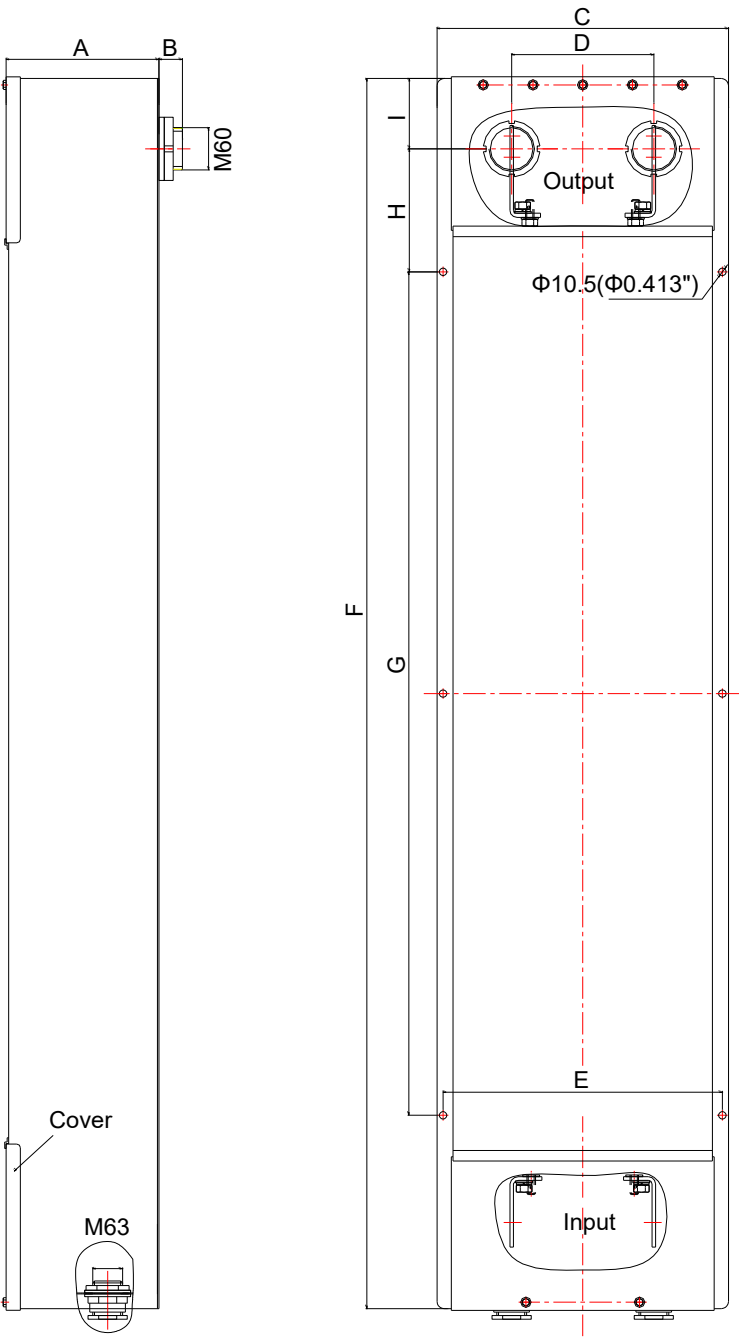

	A	B	C	D	E	F	G	H	I
mm	215	33	450	200	433	1750	1200	175	100
Inch	8.46	1.30	17.72	7.87	17.05	68.90	47.24	6.89	3.94


Tolerance: $\pm 0.02\text{in}$ / $\pm 0.5\text{mm}$



2. Specifications

Rated Voltage	277VAC/500VDC
Operating Frequency	0-60Hz
Rated Current	2x400A
Leakage Current	19.3A (@250VAC,50Hz)
Insertion Loss	100dB, 14kHz-40GHz
Shielding Effectiveness	100dB, 14kHz-40GHz
Climatic Category	25/085/21

3. Typical Insertion Loss Performance Curve (acc. to MIL-STD-220)

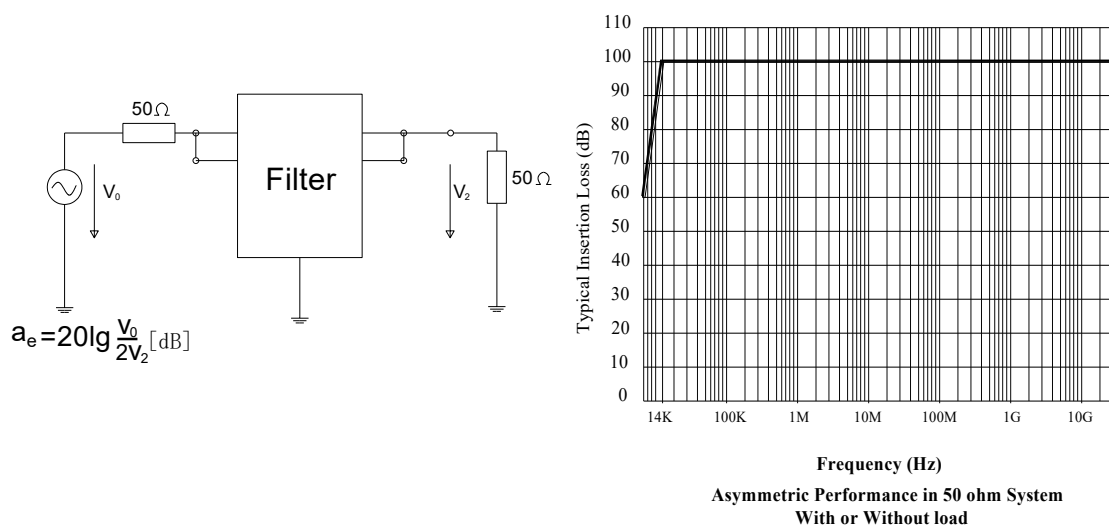

4. Accessories List

- ① M60 Conduit Screw: 2pc
- ② Gasket 60: 2pc
- ③ M60 Screw Nut: 2pc
- ④ EMI Gasket 60: 2pc
- ⑤ Cable Gland M63: 2pc
- ⑥ Certificate: 1pc



5. Installation Diagram

