

DATE	PROJECT	LOCATION	TYPE
------	---------	----------	------



PRODUCT FEATURES

PRODUCT SPECIFICATIONS


- Seamless Dot-Free Illumination
- Ultra Slim
- High Efficiency / High Output (132lm/W)
- High CRI (CRI 90)
- Bend Direction Vertically
- Indoor/Outdoor Application (IP67)
- Field Cuttable (66.7mm)
- Available in Standard Lengths of 5M reels
- Dimmable
- 15W per meter

IP Rate	IP67 with Factory Termination
Lamp Power	12.5 W/m
Power Input	24V DC
Color Rendering	Ra>90
Operating Temperature Ranges	0-45°C
Beam Angle	150°
Material	Silicon
Available Color	2700K, 3000K, 3500K, 4000K

SPECIFICATIONS TABLE


PHYSICAL SPECIFICATIONS

Model Number	Color	Lamp Power	Luminous Flux	Lumen/W
FNS 30K-24V-C90	3000K	15 W/m	1,905 lm	130 lm/W

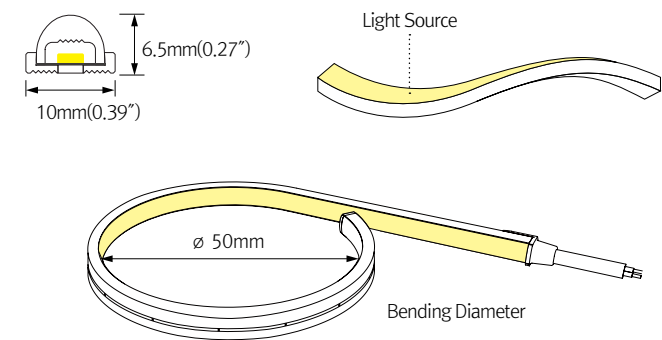


PHYSICAL SPECIFICATIONS


Model Number	A Length	B Cutting Unit	C Width	D Thickness
FNS (Color)-24V-C90	5,000mm (196.85 inch)	33.34mm (1.31 inch)	10mm (0.39 inch)	6.5mm (0.26 inch)

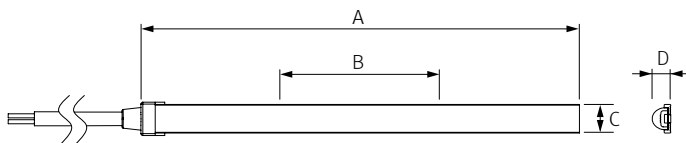

INSTALLATION

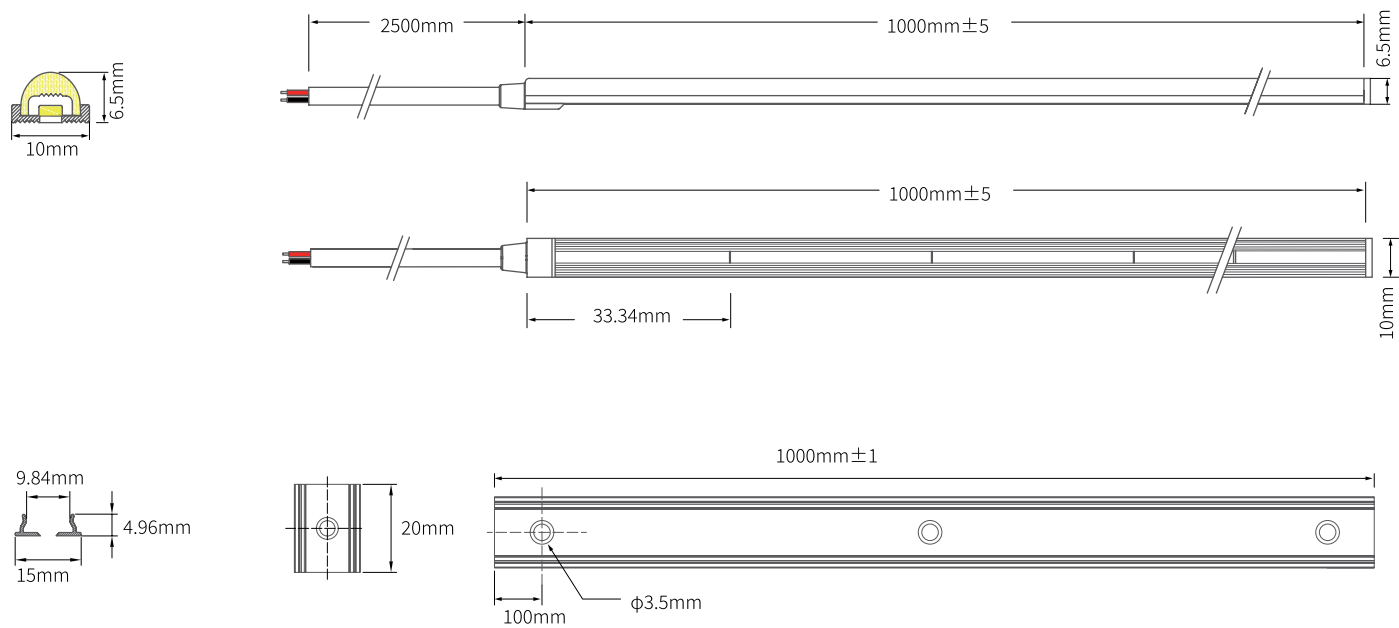

BEAM SPREADS

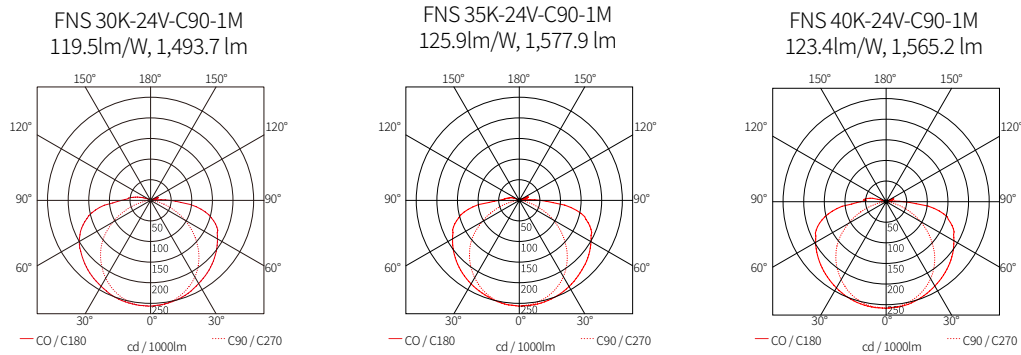


COMPONENTS



FN Smooth

- __FNS-(color)K-24V-C90-5M
- __FNS-(color)K-24V-C90-4M
- __FNS-(color)K-24V-C90-3M
- __FNS-(color)K-24V-C90-2M
- __FNS-(color)K-24V-C90-1M



Mounting Brackets

- __FNS-Bracket(4pcs = 1set)



FNS Extrusion Line

- __FNS-EXL(1,000mm)



FNS Indoor Power cable

- __FNS-INPC




FNS Indoor Connecting cable

- __FNSPTC



FNS Indoor Connector

- __FNS-INCPL



FNS END CAP

- __FNS-ENDCAP



12 Port Hub

- __12 Way distributor
- Included with Cord and Plug drivers. Order separately for 3rd Party Drivers




LED Drivers

- __FLC30-24V/T (30W)
- __FLC75-24V/T (75W)
- with distributor and power cord 1,800mm



LED Driver

- __FLC200-24V/T (200W)
- with 12way distributor



Dimming Interface (0-10V/1-10V)

- __FDC-L10 (Max. 100W)



Dimming Interface

- __FDA-L2MO
- (0-10V/1-10V, DMX512)
- Max. 200W (100W/CH, 2CH)
- __FDA-L5M (DMX512)
- Max. 200W (50W/CH, 5CH)



Dimming Interface (Dail)

- __FDD-L1DA
- Max. 200W (100W/CH, 1CH)