



TOWARDS A FUTURE OF POSSIBILITIES

Gulf Extrusions is a leading aluminium extrusion company, member of the Metals Industries, which is part of the Al Ghurair Group of companies. The company is strategically located in Dubai alongside its main supplier, Dubai Aluminium, and the foremost gateway to the world – the Jebel Ali Ports.

Since its establishment in 1976, Gulf Extrusions has been a reputed and socially responsible United Arab Emirates company for 40 years with an extremely strong regional presence. The company was formed with the sole purpose to meet the increasing demands for aluminium extrusions in domestic, regional and international markets.

Gulf Extrusions' six presses and highly skilled workforce are able to produce 60,000 metric tonnes per annum with a rated capacity of 24,000 tonnes for powder coated finish, 6,000 tonnes for anodized finish and can offer more than 18,000 profile designs. These extrusions cover numerous industries ranging from architectural to automotive, transportation, engineering to structural sections, components for household items, HVAC and customized products. Gulf Extrusions quality products can be seen in many of today's progressive structures.

Right from the progressive stages of Gulf Extrusions, from its inception to expansion, the company not only has acquired a majority share in the local market, it has also made its presence felt globally throughout the GCC countries, Indian sub-continent, South East Asia, Australia, Africa, Europe and Canada.



CURTAIN WALL



VORTEX 70MM


- » Features glass 4mm to 32mm
- » The frame & sash in the system can be thermal or non-thermal

Vortex 70 is a unique curtain wall structure that combines multi-structural grid to create various facade aspects, including four-way structural curtain wall systems. Vortex 70 has proven to be a curtain wall solution perfectly tailored to the Middle East market requirement.



VORTEX 61.5MM

- » Features glass 6mm to 32mm
- » The system can provide the possibility of large glass panels
- » The system used for four way structural glazing
- » The system used in high structures
- » Vortex 61.5mm has been tested at Al-Futtaim Exova for the below:
- > Air infiltration ASTM E283-04
- >Water penetration ASTM E331-00
- >Wind resistance ASTM E330-02 (serviceability)
- Wind resistance ASTM E330-02 (safety)

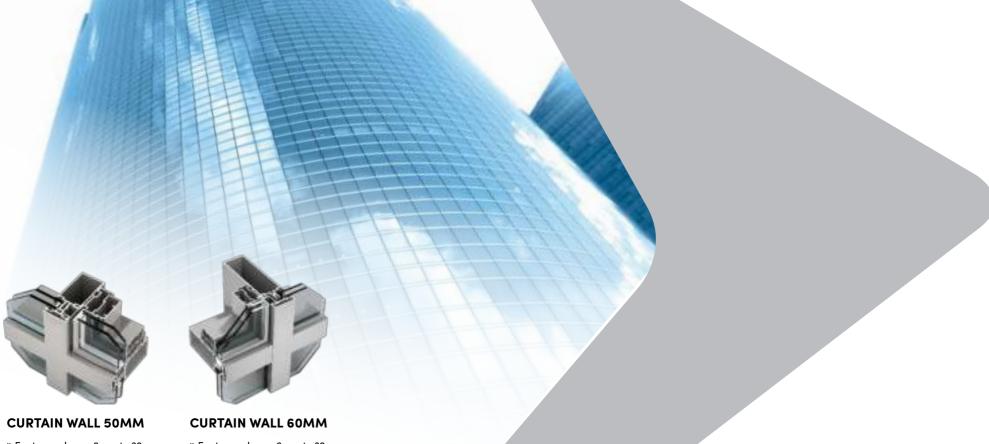

- » Features glass 6mm to 32mm
- » It is fast to manufacture and to install
- » Possibility to accommodate large panels
- » Reinforced Mullions help enhance the free span area, making it possible to be used in high structures
- » Italian openings with selected stay-arms to ensure the tightness and stability of the opening

- » Features glass 6mm to 32mm
- » Available in two-way horizontal capping and four-way structural curtain wall systems
- » Reinforced mullions make it possible to be used in high structures
- » Available as cold and thermally insulated profiles
- » It is fast to manufacture and install



SLIDING NON-INSULATED/COLD SYSTEM





» Designed for heavy duty use

» All profiles are available in

various surface treatment

» Assembly: Assembly of the

frames is done by 45° cut

90° and 45° cut

whereas the sashes are custom

options

- » Features glass 6mm to 24mm
- » Sliding 105mm has been tested at Al-Futtaim Exova
- Air infiltration ASTM E283-04
- Water penetration ASTM E331-00 (static)
- Wind resistance ASTM E330-02 (serviceability)
- >Wind resistance ASTM E330-02 (safety)
- Performance grade ANSI/ AAMA/NWWDA (101/I.S.2.97)



SLIDING UWS 1-102MM

- » Features glass 24mm
- » System performance
- » Sliding 102mm has been tested at Al-Futtaim Exova
- >Air infiltration ASTM E283-04
- >Water penetration ASTM E331-00 (static)
- >Uniform load deflection ASTM E330-02 (serviceability)
- >Uniform load structural ASTM E330–02 (safety)





HINGED 45MM

- » Features glass 4mm to 28mm
- » Frame: 45mm & 150mm
- » Hinged 45mm has been tested at Al-Futtaim Exova
- >Air infiltration ASTM E283-04
- >Water penetration ASTM E331-00 (static)
- >Wind resistance ASTM E330-02 (serviceability)
- >Wind resistance ASTM E330-02 (safety)



HINGED 42MM

- » Features glass 6mm to 24mm
- » Frame: Strong cross section profiles of 42mm up to 180 mm
- » The system can be inward and outward opening
- » The system can be used for door and window
- » The system covers arch shape, louvers & swing doors

HINGED INSULATED/THERMAL BREAK



TB-600 SERIES

- » Features glass 18mm to 38mm
- » Thermally broken system provides excellent thermal comfort
- » Full range of tested Gulf Extrusions accessories available
- » TB-600 system has been tested at Al-Futtaim Exova for
- Air infiltration ASTM E283-04
- >Water penetration ASTM E331-00 (static)
- Wind resistance ASTM E330-02 (serviceability)
- Wind resistance ASTM E330-02 (safety)



THERMAL BREAK HINGED 62MM

- » Features glass 18mm to 40 mm
- » The system can be inward and outward opening
- » Thermally broken system with Thermal strip of 22mm
- » The system can be used for Doors, Windows, Turn & Tilt Windows
- » Available with full range of Gulf Extrusions accessories







ANODIZING

Anodized aluminium is now fashionable as a design statement. Gulf Extrusions offers a wide range of anodizing treatmet options. Available colors range from Natural, Gold, Silver and Bronze to Spectrum (Blue, Green, Grey, Red and more). The Company also holds accreditation from QUALANOD – a quality label that guarantees high quality Aluminium Anodizing.

Anodizing Benefits:

Durability: Since anodized aluminum extrusion products have a protective layer, they are more resistant to wear from normal handling and usage.

Finishing: The process creates a more aesthetically pleasing finish, with either a clear or colored appearance suitable for almost all architectural, industrial and automotive applications.

Corrosion resistance: The thick outer coating produced, along with proper sealing, increases the corrosion resistivity of the surface as it prevents further oxidization.

Lasting Color: The color finish added to anodized aluminum is more enduring due to the surface obtaining more adhesive and porous qualities during the anodizing process. The resulting anodic film coating allows for effective dyeing processes to be applied.

Strength: The anodized aluminum surface is harder than pure aluminium, second only to diamonds with respect to its hard crystalline structure.

POWDER COATING

Gulf Extrusions has 3 state-of-the-art powder coating lines which are equipped to handle profiles of various dimensions. Powder coatings offered by Gulf Extrusions are thermosetting powders which provide excellent performance with a wide choice of colours. Our coatings are available for all profiles from Gulf Extrusions, be it for facades, high rises or window sections for villas. Our efficient system ensures fast turnaround and also quality in line with the best international standards.

We offer coatings to meet the harsh challenges in today's environment and our coatings meet the requirements of Qualicoat Class 1, 2 and 3.

Powder Coating Benefits:

- Powder coatings emit zero or near zero volatile organic compounds
 (VOC)
- 2. Powder coating overspray can be recycled (Over- sprayed powder can be reclaimed)
- 3. Powder coating production lines produce less hazardous waste than conventional liquid coatings
- 4. Powder coated items generally have fewer appearance differences

- with more consistent and durable surface
- 5. Wider color and gloss ranges
- 6. Varieties of surface finishes (rough, smooth, texture)
- 7. Varieties of special finishes (wood, marble, metallic)
- 8. Energy saving coatings like heat reflective coatings which help consume less energy through reflecting external heat







CRIMPING

Thermally broken architectural systems help in conserving energy, reducing water condensation and noise pollution. Gulf Extrusions offers systems like:

- » TB-62 Hinged Series
- » TB-600 Hinged Series
- » TB-900 Sliding Series
- » 120mm Montana Sliding Series
- » Thermal Broken Curtain Wall Systems

Profiles of these systems are joined together by means of a rigid and strong thermal resistant glass-fibre polyamide insulation strip. It minimizes thermal conductivity by 35%.

LABORATORY

The laboratory services at Gulf Extrusions guarantees product quality through extensive analysis and testing before and after any process has been approved for production. Gulf Extrusions has the highest quality testing equipment such as a Spectrometer, which controls the chemical composition of the aluminium alloys, an Electron Microscope for high magnification readings, surface roughness measuring devices and various other devices that ensure the final quality of our products are of the highest standards.

The testing services are:

- » Mechanical Testing
- » Analysis
- » Metal Nitriding

- » Metal Composition
- » Chemical Analysis
- » Machining Services

OUR QUALITY LABELS, CERTIFICATIONS AND MEMBERSHIPS



Qualanod (European Anodizers Association)



Qualicoat (European Powder Coaters Association)



ISO 14001: 2004 (Environment Management System)



ISO 9001: 2008 (Quality Management System)



OHASAS 18001 (Health & Safety Management System)



TUV Rheinland for TS 16949 (For Automotive applications)





ESMA Emirates Authority for Standardization and Metrology



AAC member (Aluminium Anodizers Council USA)



SASO Saudi Arabian Standards Organization



DNV certification for marine applications





GULF EXTRUSIONS CO. LLC

PO BOX 5598, Jebel Ali Industrial Area, Dubai, United Arab Emirates. Tel: +971 4 8846146 Fax: +971 4 8846830 Toll Free (in UAE): 800–GULFEX