



**PRODUCT
CATALOGUE**

ABOUT KINNAR INDUSTRIAL

Kinnar Industrial manufactures and supplies premium hoses, spray components, crack injection packers, abrasive consumables and construction tools to Australian businesses.

Proudly Australian-owned and focused.

Products selected, tested and stocked specifically for Australian job site conditions, climate and regulatory standards.

Own Brand Range

Our Pro and Eco Series are engineered under the Kinnar name, meaning direct quality control, better pricing and full accountability.

Technical Backup

Not just a product sale. Our team provides real technical support on application, compatibility and specification for every product line.

National Distribution

Delivery and local support in every state and territory through our authorised distributors.



PRI Inject & Spray Solutions is our preferred distributor.
Visit them at: www.pri-injspray.com.au

TABLE OF CONTENTS

High Pressure Injection Pumps.....	Page 3
Airless Spray Hoses.....	Page 6
Industrial Spray Hoses.....	Page 7
Steel Injection Packers.....	Page 8
Steel Hose Packer & Joiner.....	Page 15
Other Products.....	Page 19

HIGH-PRESSURE INJECTION PUMPS

Professional-grade high-pressure injection pump systems capable of achieving 10,000 psi output.

These pumps are powered by electric or cordless drills (not included) and feature dual pressure gauges for accurate monitoring.

Designed for construction, painting, and industrial spray injection applications.



DUAL INJECTION PUMP

(WITHOUT DRILL, FOR CORDLESS DRILL USE)



***comes with cordless drill attachments**

Specification	Value
Type	High Pressure Dual Injection Pump
Configuration	Dual pump system with independent control
Maximum Output Pressure	10,000 psi (700 bar)
Pressure of Starting Again	7,500 psi
Safe Range - High Pressure Hose	10,000 psi
Safe Range - Switch Valve	18,000 psi
Tank Capacity	10L (standard, with measurement markings)
Drive System	Requires external drill (not included)
Material Compatibility	Paint, polyurethane, epoxy, acrylic resins, crack injection
Hose Connections	G1/2" inlet and discharge ports
Tank Material	HDPE plastic with level markings
Pump Body Material	Brass/Bronze casting for corrosion resistance
Operating Temperature	-5°C to +50°C
Safety Requirements	Protective gloves and glasses during operation

SINGLE DRILL PUMP

(WITHOUT DRILL, FOR CORDLESS DRILL USE)



***comes with cordless drill attachments**

Specification	Value
Type	High Pressure Single Drill Injection Pump
Configuration	Single pump system for compact applications
Maximum Output Pressure	10,000 psi (700 bar)
Pressure of Starting Again	7,500 psi
Safe Range - High Pressure Hose	10,000 psi
Safe Range - Switch Valve	18,000 psi
Tank Capacity	5L (compact size with measurement markings)
Drive System	Powered by electric or cordless drill (not included)
Drill Speed Control	Variable speed via drill trigger for flow adjustment
Material Compatibility	Paint, polyurethane, epoxy, acrylic resins, crack injection
Hose Connection - Inlet	G1/4"
Hose Connection - Discharge	G1/2"
Pump Body Material	Aluminium casting for corrosion resistance
Weight (Complete Assembly)	Approximately 12-14 kg (pump + tank + hoses)
Flow Rate Range	Adjustable via drill speed: 1.5-4 liters per minute

AIRLESS SPRAY HOSES

High-pressure airless spray hoses rated for professional paint and coating applications. Multiple lengths and diameters available.



Construction:

Tube: internal core in polyamide

Reinforcement: Polyester yarn braid

Cover: polyurethane, blue, black, red, grey


Application:

Designed for high pressure airless spray systems, chemical resistance. Suitable for paint, solvents, and aggressive fluids

Temperature: 40°C to +100°C (-72 °F to +212 °F)

Characteristic:

- High abrasion resistant cover
- High pressure Max W.P.50Mpa
- Chemical and solvents resistance
- 7.5 & 15 metre
- ¼ fillings

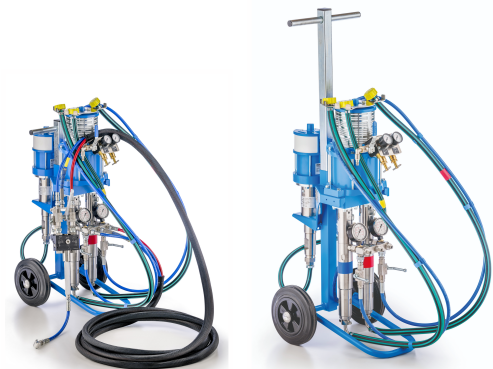

 I.D		 O.D		 W.P		 B.P		 R	 kg
mm	inch	mm	inch	MPa	psi	MPa	psi	mm	Kg/m
6.4	1/4	12.5	0.49	22.7	3292	68.1	9874.5	30	0.13
9.5	3/8	16.0	0.62	22.7	3292	68.1	9874.5	80	0.31

INDUSTRIAL AIR HOSES



Reinforced industrial air supply hoses for compressors, pneumatic tools and workshop applications. Built to handle demanding environments.

Temperature: -40°C (-104°F) to 70°C (+158°F)

Characteristic:

- Type A fittings
- No leaking
- Easy to handle
- Weather, heat and ozone resistant
- Excellent abrasion resistance

Construction:

Tube: NR & SBR synthetic rubber, black color.

Reinforcement: 2 ply high tensile polyester thread braiding

Cover: NR & SBR synthetic rubber, wrapped surface, yellow

 I.D		 O.D	 W.P		 B.P		 L	
inch	mm	mm	bar	psi	bar	psi	m	ft
3/4"	19.1	29	20	300	60	900	100	330
1"	25.4	36	20	300	60	900	100	330

STEEL INJECTION PACKERS

Steel packers are constructed using specially coated steel to make them strong and durable.

Steel Packers have the non-return ball valve located in the head/grease nipple which can simply be removed, enabling the operative to relieve the water pressure within the structure prior to injection and to also see the flow of resin during injection.



STEEL INJECTION PACKERS

Configuration	Body Diameter	Length
Grease Head	10mm	100mm
Grease Head	10mm	115mm
Grease Head	13mm	115mm
Grease Head	13mm	450mm



Config.	Body Diameter	Length
Grease Head	10mm	120mm
Grease Head	10mm	160mm
Grease Head/Flat Head	13mm	120mm
Grease Head/Flat Head	13mm	160mm

Configuration	Body Diameter	Length
Flat Head	13mm	600mm
Flat Head	16mm	130mm
Flat Head	16mm	150mm
Flat Head	16mm	300mm
Flat Head	16mm	600mm
Flat Head	18mm	170mm
Flat Head	18mm	300mm
Flat Head	18mm	600mm

STEEL HOSE PACKER & JOINER



Hose Packer



**Hose Joiner
(Double ends)**

Steel hose packers and joiners are constructed using specially coated steel to make them strong and durable. Best suited for construction-joint and ducting injection, with double-ended for through-injection.

Configuration	Size
Hose Joiner (Double ends)	6 - 8mm
Hose Packer	6 - 8mm

ALUMINIUM INJECTION PACKERS



**Flat Head
injection
packers**



**Grease Head
injection
packers**

Aluminium packers, part of the Kinnar Eco Range, feature a non-return ball valve housed within the grease nipple to maintain pressure and prevent backflow during injection. The grease nipple can be easily removed to relieve water pressure prior to injection, allowing for safer operation and improved control.

Designed for reliable sealing, consistent expansion, and efficient injection across a range of applications.

Configuration	Body Diameter	Length
Grease Head	10mm	100mm
Grease Head	10mm	200mm
Grease Head	10mm	300mm
Grease Head	10mm	450mm
Grease Head	13mm	100mm
Grease Head	13mm	300mm
Flat Head	13mm	100mm
Flat Head	13mm	120mm
Grease Head	13mm	450mm

AIR FITTINGS



**Male End
1-2**



**Male End
3-4**



**Hose End
3-8**




Hose End

Kinnar air fittings connect, isolate and control compressed-air supply across injection equipment and general pneumatic systems. The air fittings provide quick, secure hose-to-hose and hose-to-tool connections.

Fitting Type	Connection Size
Hose End	3/8"
Hose End	1/2"
Hose End	3/4"
Male End	3/8"
Male End	1/2"
Male End	3/4"
Hose End – Type A	3/4"
Hose End – Type A	1"

2-WAY HIGH PRESSURE BALL VALVES

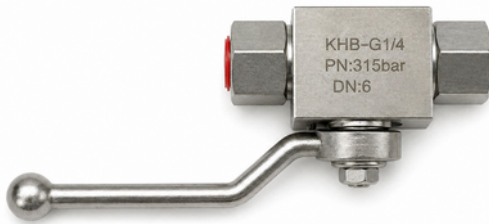

**2-way high
pressure ball valve**

Kinnar valves connect, isolate and control compressed-air supply across injection equipment and general pneumatic systems. Two-way high-pressure ball valves give reliable quarter-turn isolation and flow control.

Valve	Connection Size
Two-Way High Pressure Ball Valve	1/4"
Two-Way High Pressure Ball Valve	3/8"
Two-Way High Pressure Ball Valve	1/2"
Two-Way High Pressure Ball Valve	3/4"

OTHER PRODUCTS

PAINT BRUSHES



**50mm
Paint brush**

Specification	Value
Width	50mm
Bristle Type	Synthetic/Natural blend
Bristle Length	Standard
Handle Type	Wooden or Plastic
Applications	General painting, walls, trim
Paint Compatibility	Acrylic, Oil, Latex



**100mm
Paint brush**

Specification	Value
Width	100mm
Bristle Type	Synthetic/Natural blend
Bristle Length	Standard
Handle Type	Wooden or Plastic
Applications	Large surface areas, walls, ceilings
Paint Compatibility	Acrylic, Oil, Latex