



# LIFTING SLIDING DOORS

## PRODUCT MANUAL

—— Understand doors and windows • Understand life better ——





上海景伸建材有限公司  
SHANGHAI JINGSHEN BUILDING MATERIALS CO., LTD.

SUPPLIER OF SUN SHADING SYSTEM SPACE SOLUTIONS

SLIDING DOORS CONNECT YOUR  
HOUSE PERFECTLY FROM THE  
INSIDE OUT



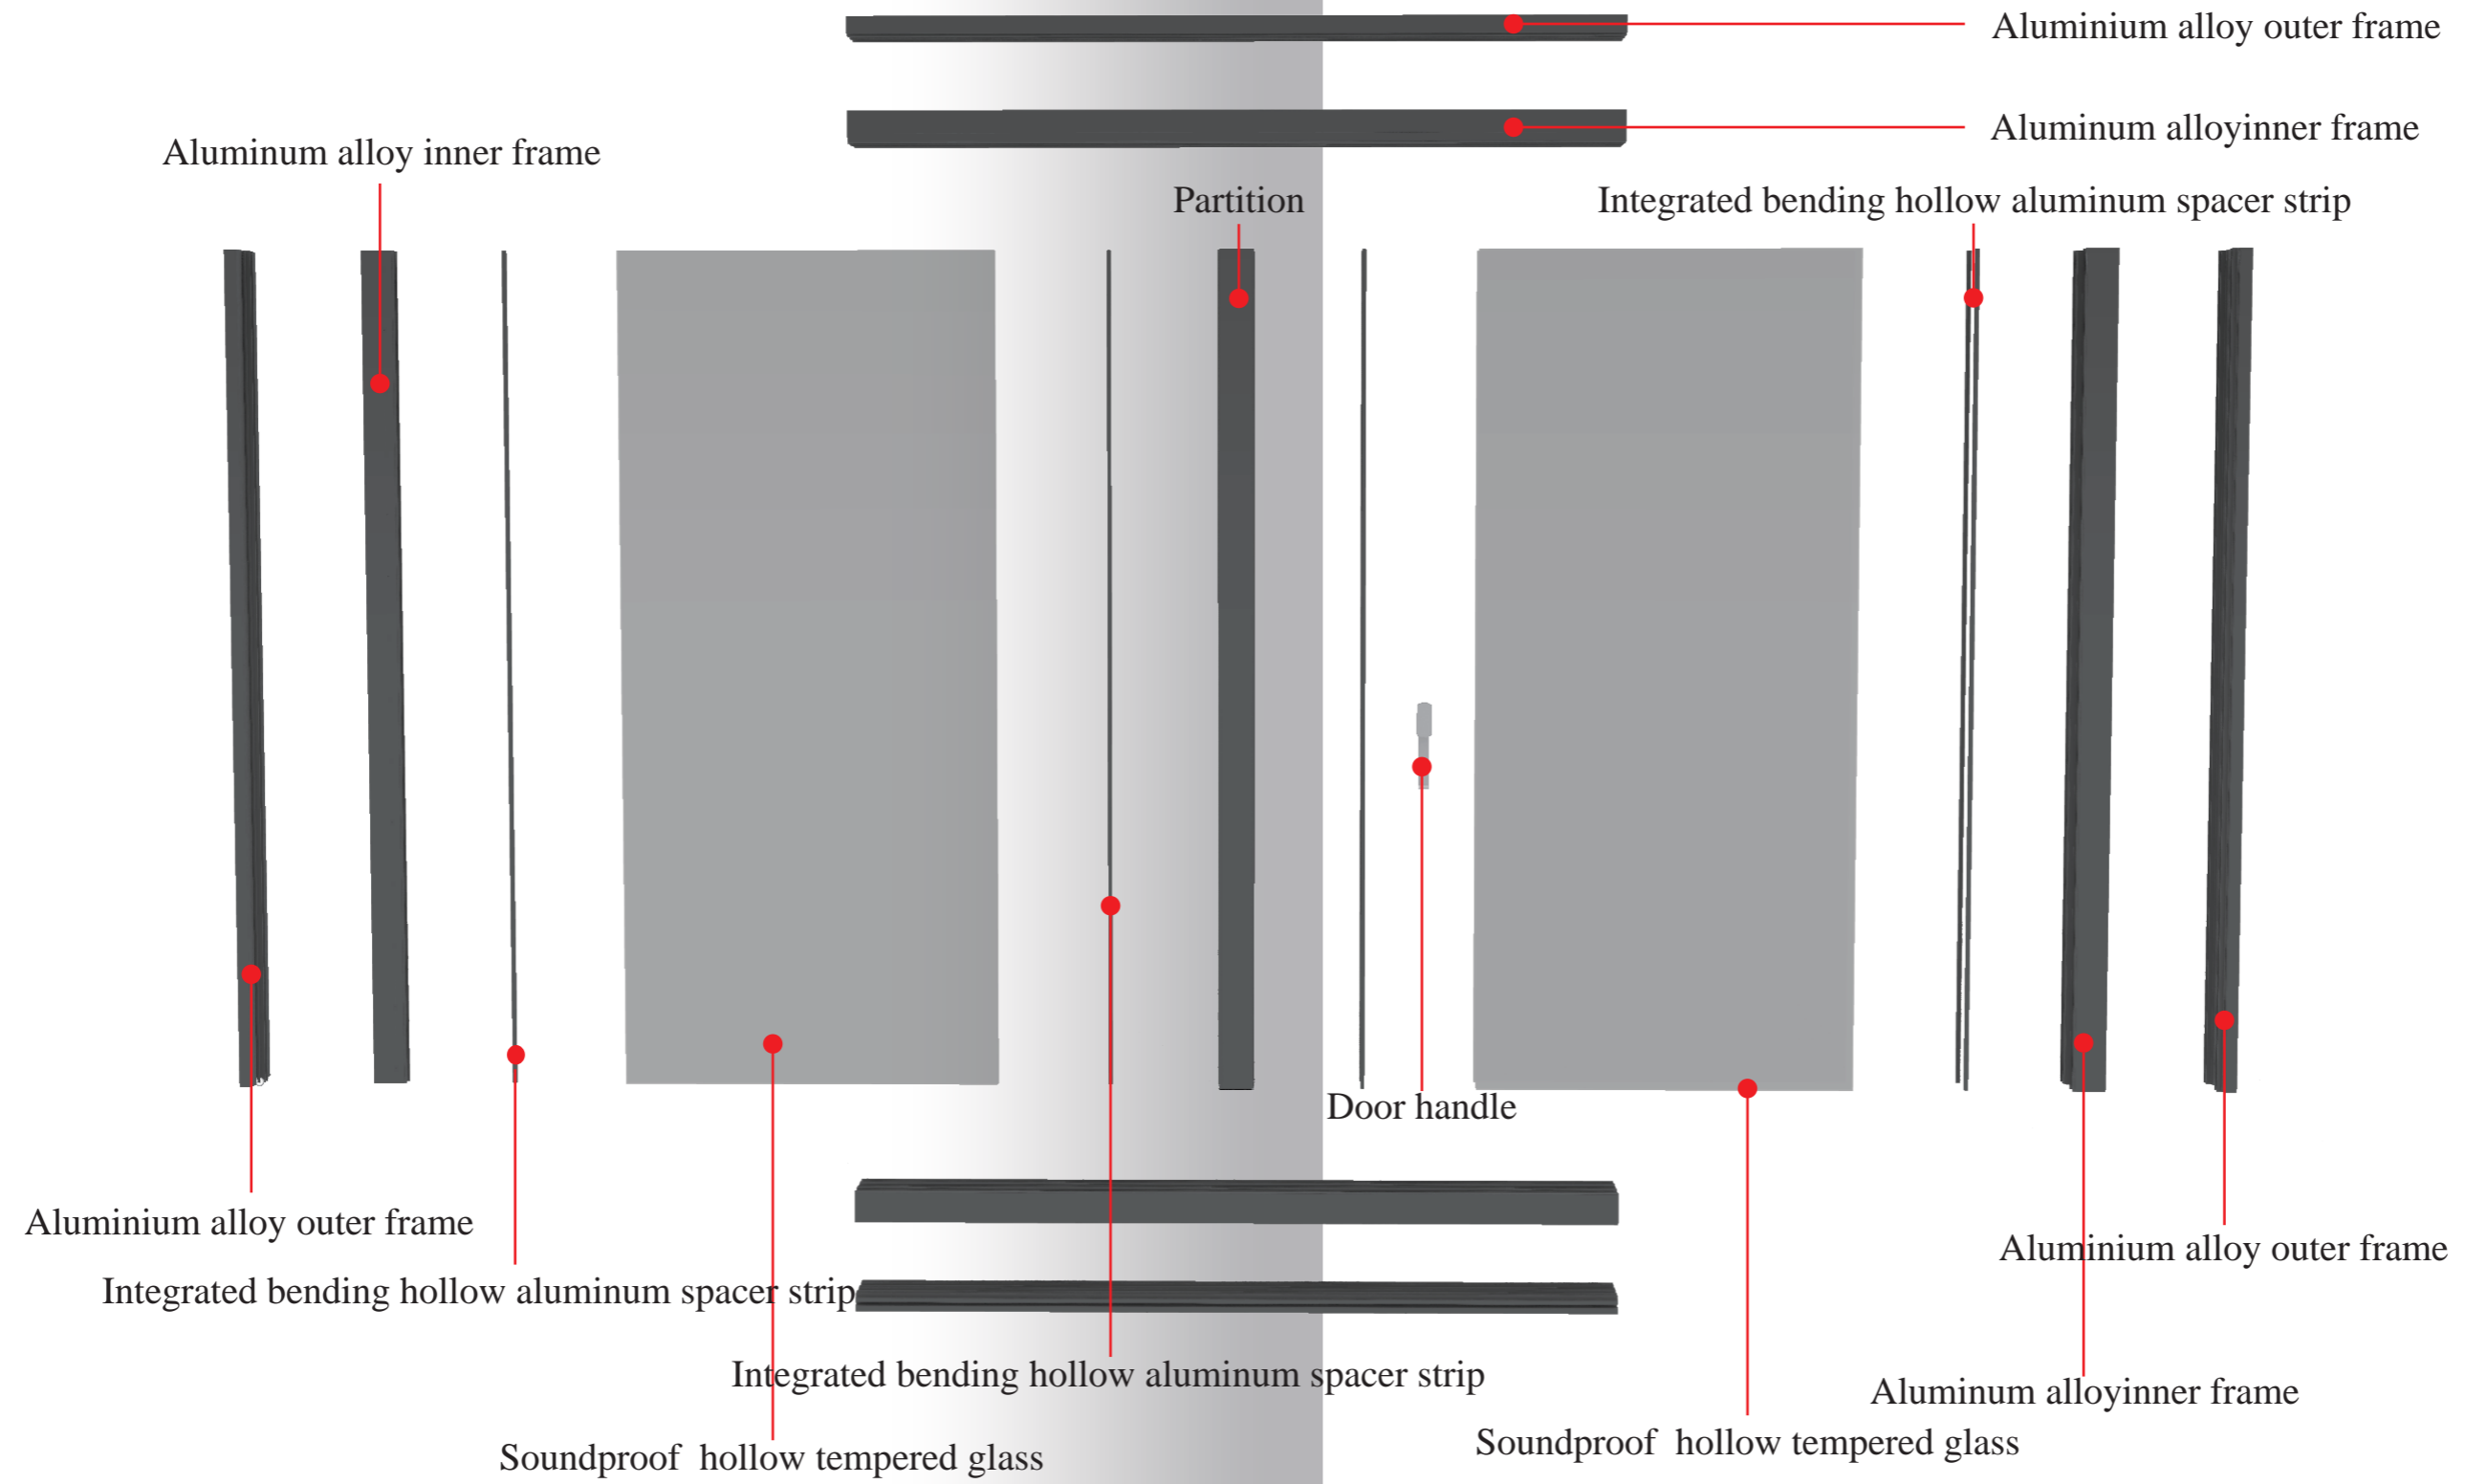

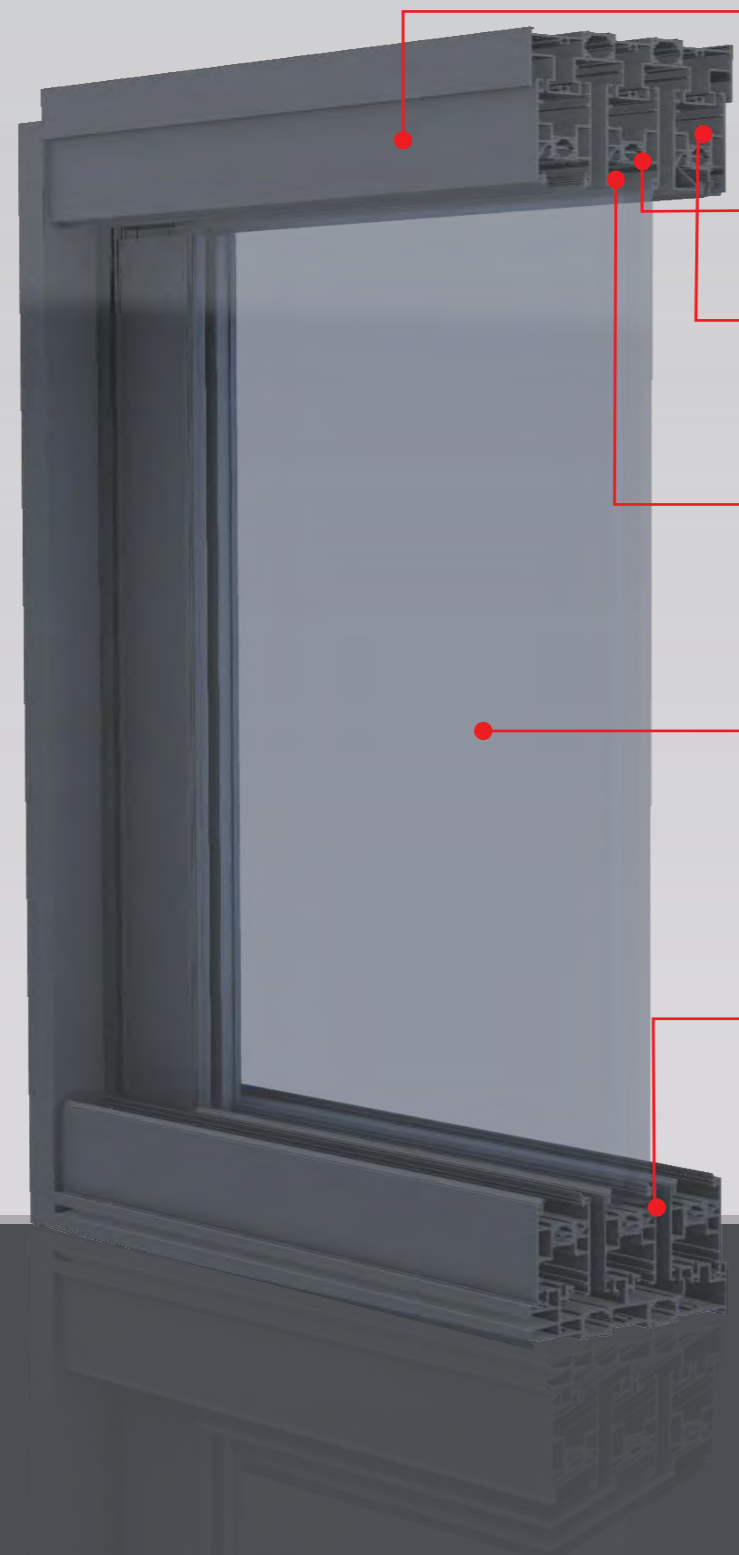

6063 T6 Native aluminum material

Integrated bending hollow aluminum spacer strip

PA-66 heat insulation bar

Outdoor long tail rubber strip


Soundproof hollow tempered glass

Composite rubber strip



### **High quality hardware**

We use world-class quality hardware accessories that are durable, safe, and reliable, ensuring the service life of aluminum alloy doors and windows.

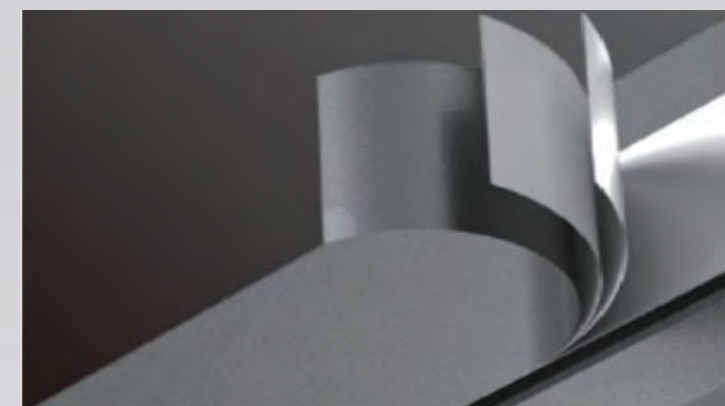

### **High precision aluminum**

Adopting a super weather resistant spraying process, it has excellent resistance to fading, ultraviolet radiation, and corrosion caused by air pollution (acid rain, etc.)



# SAFETY SYSTEM

# SAFETY

Lift sliding door is equipped with high-strength aluminum alloy profiles and high-density tempered glass, which can effectively resist external damage and provide high safety assurance.



SAFE WINDOWS AND DOORS ARE  
PART OF THE COMFORT OF THE  
HOME



# SOUNDPROOF

## Sleep is not disturbed by noise


Multi sealed design with tight seams enhances the overall airtightness of the door. The double-layer insulated glass reduces noise layer by layer, providing a quiet and comfortable living environment for family members.



Sound insulation  
noise reduction



Outdoor 80 dB



Indoor 40 dB

# SUN PROTECTION

## Take comfort in your own hands

The sliding door is equipped with double-layer insulated glass and insulation strips, which can improve the insulation performance of the sliding door, reduce energy loss, close the sliding door in high temperature weather, maintain stable indoor temperature, and enjoy a comfortable and quiet life.



sunproof



heat insulation

# AGAINST BAD WEATHER

## Good quality, fearless of wind and rain

The sliding door is equipped with high-quality sealing strips located at the edge of the door leaf. The sealing strips form a continuous sealing line with the door frame, which can tightly fit the door frame and ensure that rainwater cannot enter the room. Protect indoor environment from moisture and water damage. To ensure the durability and practicality of sliding doors.



moisture resistance




Air tightness

# 06


 level

China Energy saving Product Certification  
Water tightness level 1-6 standard  
The water tightness level reaches intermediate  
to level 06

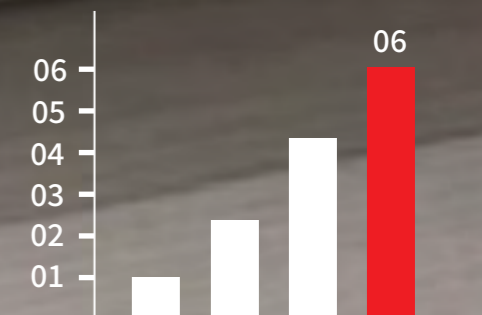

# Details create good quality

- Modern design that conforms to ergonomics
- Comfortable and simple operation, enjoy a noise free and seamless switching experience
- Available in multiple colors to meet the requirements of modern architectural design
- Has strong security performance

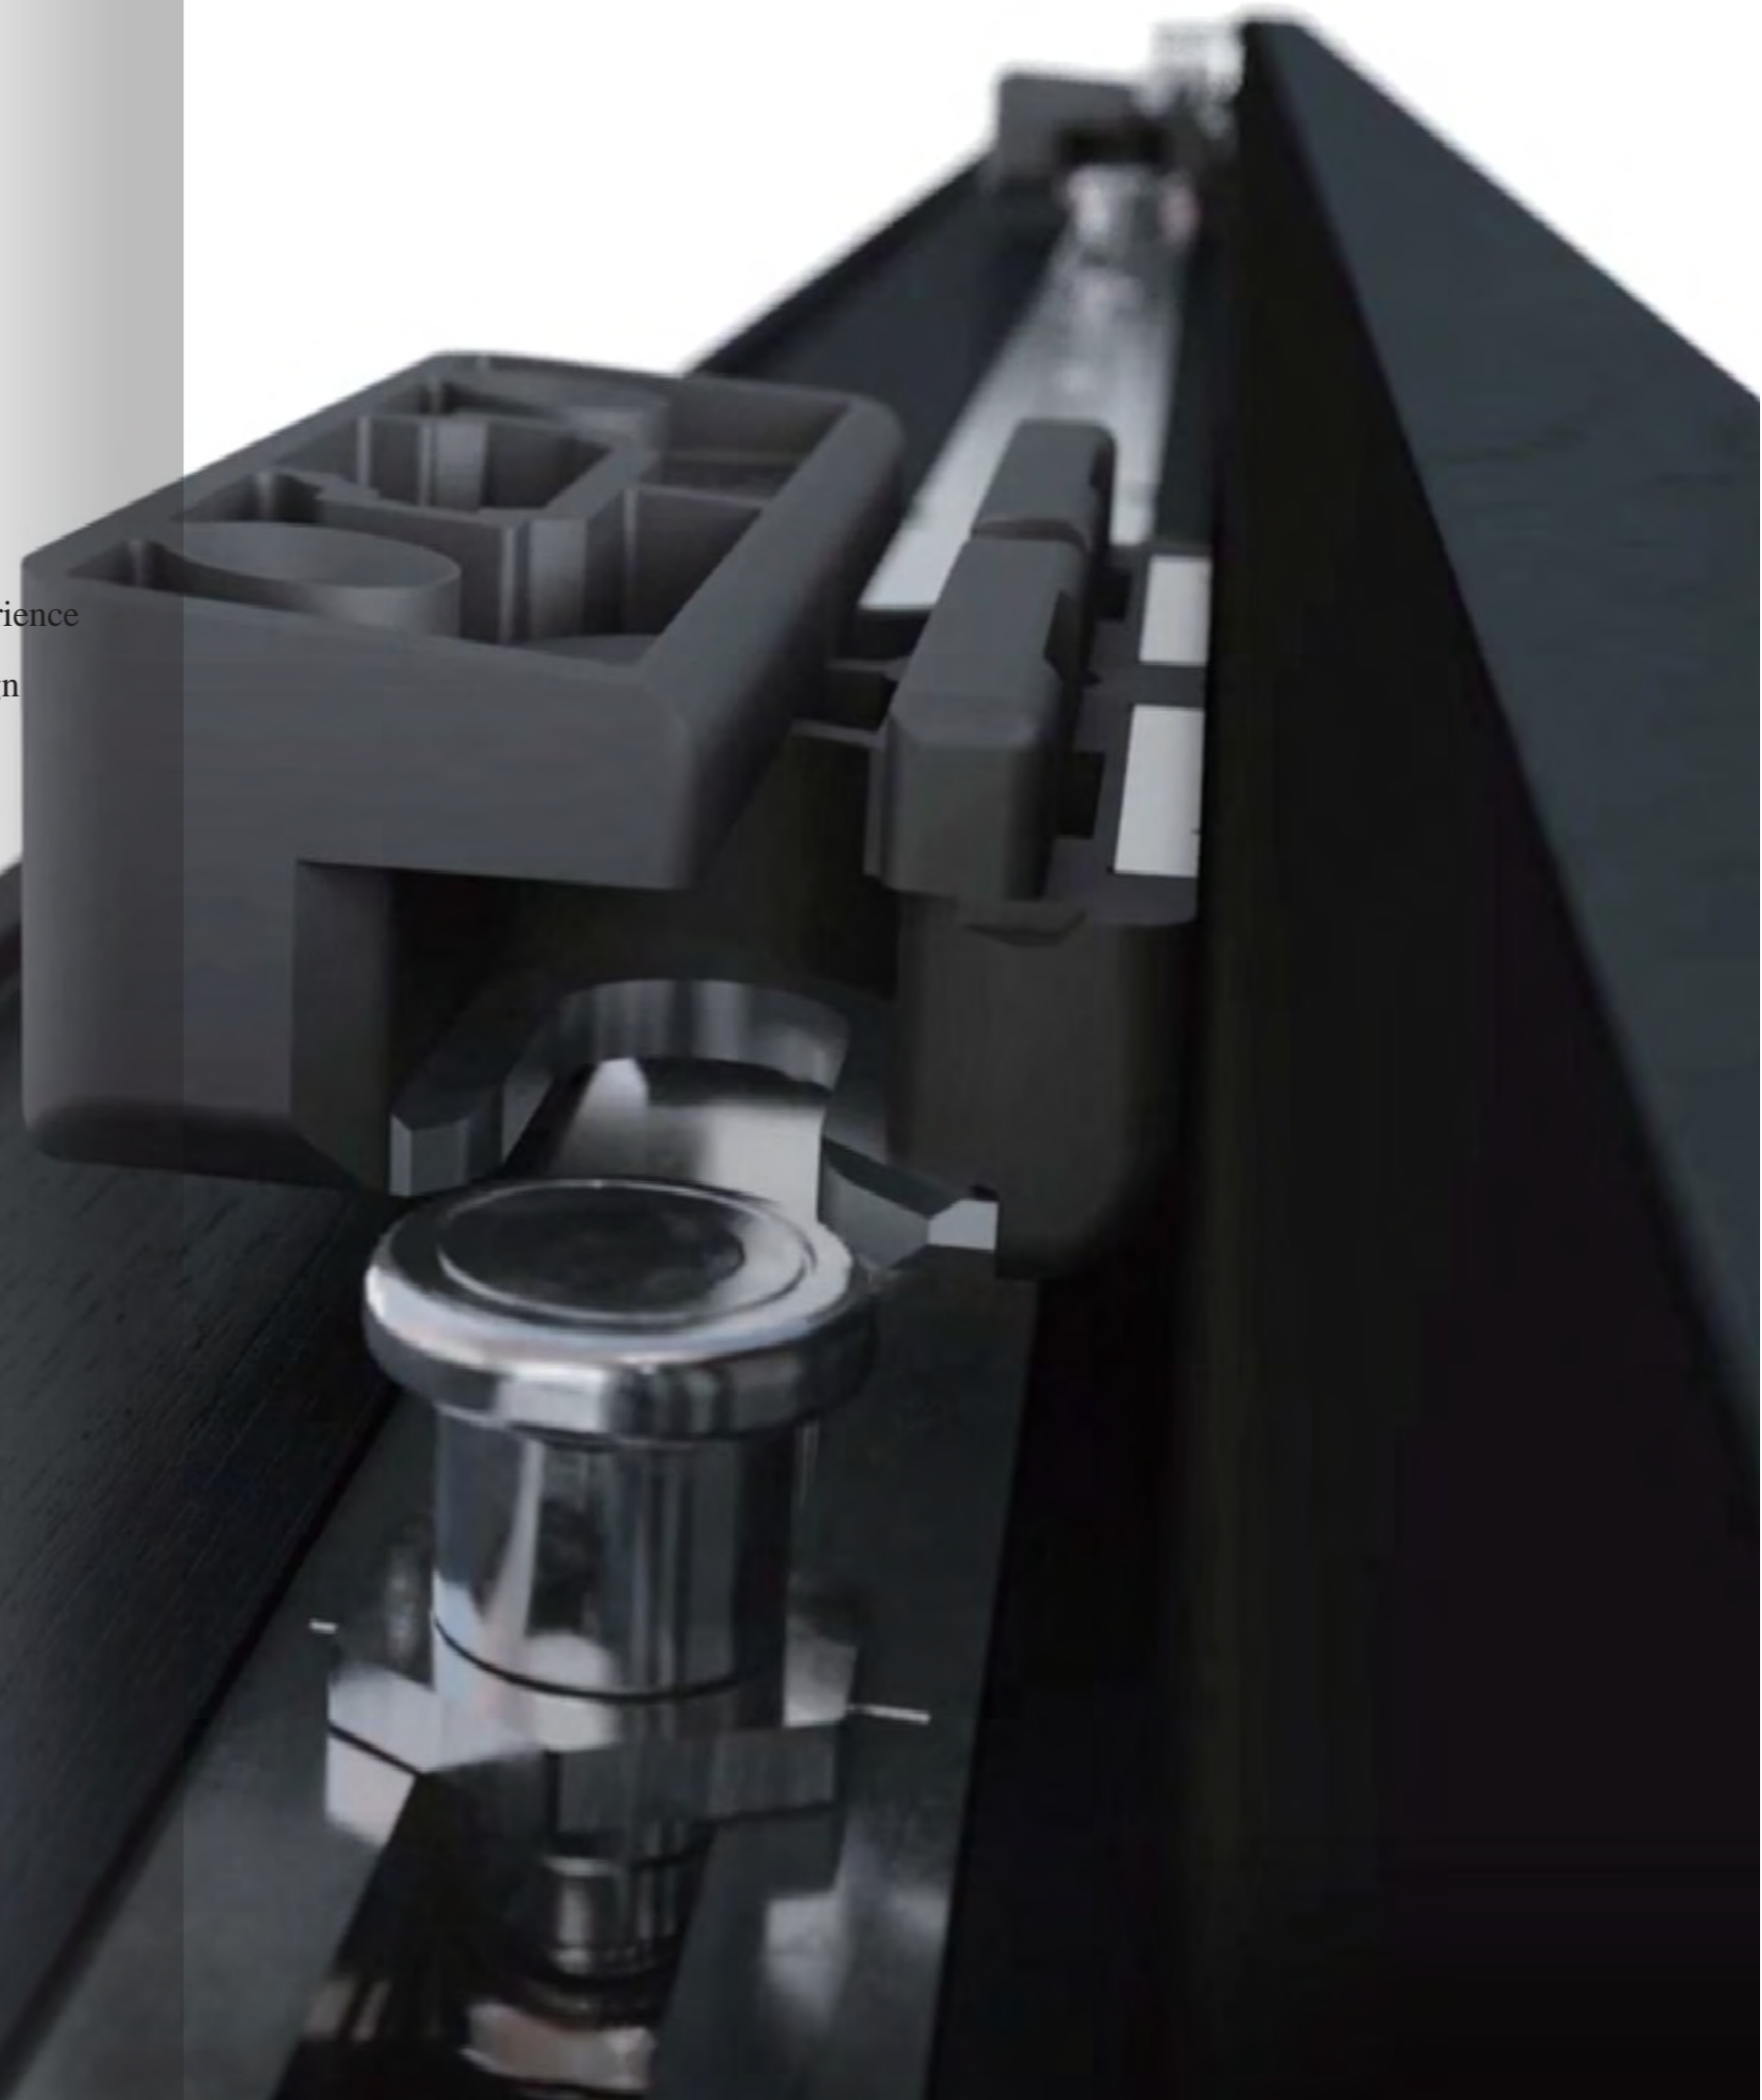



SLIDING DOOR,  
PERFECT INTEGRATION FROM INSIDE TO OUT-SIDE,  
COMFORTABLE ENJOYMENT!



# 110 series

## Product Features



1. It can achieve opening modes such as one fixed one push, two fixed two push, double fan push-pull, and four fan push-pull.
2. The appearance is simple, beautiful and generous, with a well-designed waterproof and drainage structure, and excellent water tightness performance.
3. Adopting multiple sealing channels, 5+20A+5 double sealed insulated glass, greatly improves the air tightness, water tightness, and sound insulation performance of the window.
4. Imported high-end hardware accessories, flexible operation, and durable quality.
5. Hollow aluminum strip, integrated bending process forms a hollow closed environment, effectively reducing sound decibels. Internally filled with 3A molecular sieve, moisture-proof and mold proof.
6. The track adopts a stainless steel design and a stepped pressure equalization principle drainage system to make the drainage of windows smoother and better enhance the waterproof performance of doors and windows. The frame adopts an embedded design with stronger sealing effect.
7. The insulation system uses PA66 insulation composite strips, and advanced composite technology ensures that the heat-insulating profiles have better tensile and shear strength, as well as better insulation performance.



## Product parameters

Visual width/height (indoor side)	Profile width	Wall thickness of profiles	Glass thickness	hardware
frame : 32mm glass : 82mm	frame : 114mm glass : 45mm	frame : 1.6mm fan : 1.6mm	5+20A+5	Siegenia Germany

## Opening method

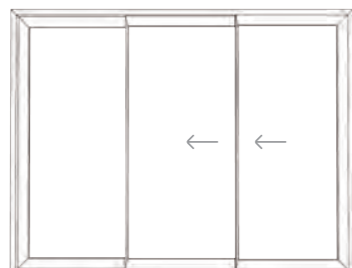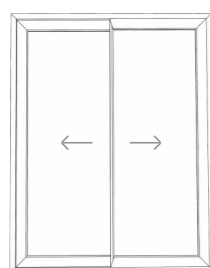



# 130 series

## Product Features

1. It can achieve opening modes such as one fixed one push, two fixed two push, double fan push-pull, and four fan push-pull.
2. The appearance is simple, beautiful and generous, with a well-designed waterproof and drainage structure, and excellent water tightness performance.
3. Adopting multiple sealing channels, 5+20A+5 double sealed insulated glass, greatly improves the air tightness, water tightness, and sound insulation performance of the window.
4. Imported high-end hardware accessories, flexible operation, and durable quality.
5. Hollow aluminum strip, integrated bending process forms a hollow closed environment, effectively reducing sound decibels. Internally filled with 3A molecular sieve, moisture-proof and mold proof.
6. The track adopts a stainless steel design and a stepped pressure equalization principle drainage system to make the drainage of windows smoother and better enhance the waterproof performance of doors and windows. The frame adopts an embedded design with stronger sealing effect.
7. The insulation system uses PA66 insulation composite strips, and advanced composite technology ensures that the heat-insulating profiles have better tensile and shear strength, as well as better insulation performance.

## Product parameters

Visual width/height (indoor side)	Profile width	Wall thickness of profiles	Glass thickness	hardware
frame : 36mm glass : 93mm	frame : 173mm glass : 55mm	frame : 2.0mm fan : 2.0mm	5+20A+5	Siegenia Germany

## Opening method





# 170 seriesz

## Product Features

1. It can achieve opening modes such as one fixed one push, two fixed two push, double fan push-pull, and four fan push-pull.
2. The appearance is simple, beautiful and generous, with a well-designed waterproof and drainage structure, and excellent water tightness performance.
3. Adopting multiple sealing channels, 5+20A+5 +20A+5 triple sealed insulated glass, greatly improves the air tightness, water tightness, and sound insulation performance of the window.
4. Imported high-end hardware accessories, flexible operation, and durable quality.
5. Hollow aluminum strip, integrated bending process forms a hollow closed environment, effectively reducing sound decibels. Internally filled with 3A molecular sieve, moisture-proof and mold proof.
6. The track adopts a stainless steel design and a stepped pressure equalization principle drainage system to make the drainage of windows smoother and better enhance the waterproof performance of doors and windows. The frame adopts an embedded design with stronger sealing effect.
7. The insulation system uses PA66 insulation composite strips, and advanced composite technology ensures that the heat-insulating profiles have better tensile and shear strength, as well as better insulation performance.

## Product parameters

Visual width/height (indoor side)	Profile width	Wall thickness of profiles	Glass thickness	hardware
frame : 38mm glass : 106mm	frame : 160mm glass : 65mm	frame : 2.0mm frame : 2.0mm	5+20A+5+20A+5	Siegenia Germany

## Opening method



# COLOR CONFIGURATION

Color configuration is a comprehensive decision-making process that combines aesthetics, functionality, and personal preferences. Through careful selection, it can not only provide visual enjoyment, but also bring physical and mental pleasure and relaxation to users.



## About Color Difference

Due to factors such as photography equipment, displays, lighting, etc., there may be slight discoloration



## About measurement and installation

In most parts of the country, on-site measurements can be taken, and professional technicians can be arranged for on-site installation to ensure the accuracy of the dimensions.



## About quality

The source factory strictly selects materials and controls product quality

Shanghai Jingshen Building Materials comes with a five-year warranty



Shanghai Jingshen Building Materials has a five-year warranty, which indicates that the company has strict requirements for product quality. In order to ensure product quality, the company has conducted multiple tests and provided customers with high-quality solutions and products.

上海景伸建材有限公司  
SHANGHAI JINGSHEN BUILDING MATERIALS CO., LTD.

SUPPLIER OF SUN SHADING SYSTEM SPACE SOLUTIONS



Follow the public account

Shanghai Jingshen Building Materials Co., Ltd

☎ | 137 0177 0484

📍 | 207A, No. 950 Songhua Road, Qingpu District, Shanghai

🌐 | [www.jingshenjc.com](http://www.jingshenjc.com)