



ESPECIFICAÇÕES TÉCNICAS NT8 HYBRID

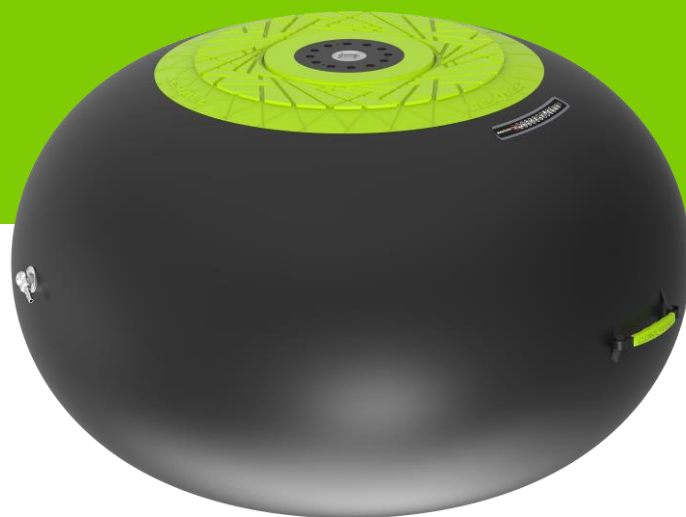

10 mm 3/8" 70 mm 2 3/4"

NT8 HYBRID INCL. STORAGE CASE

Pressão máxima de funcionamento	12 bar
Capacidade máxima de elevação	156 tonnes
Capacidade máxima de elevação à altura máxima de elevação	14 tonnes
Altura de inserção	10 mm / 70 mm
Altura máxima de elevação	N x 665 mm
Altura efectiva de elevação	N x 595 mm
Volume	350 liter
Conteúdo máximo de ar	4,550 liter
Gama de temperaturas	-20 °C till +65 °C
Peso	38 kg
Factor de segurança	> 4
Diâmetro	1300 mm

ACESSÓRIOS	Art. Nr.	ACESSÓRIOS	Art. Nr.
Storage case NT8 Hybrid	8705.0250	Shut-off hose 12 bar / 2m / red / rubber	8700.1352
Accessory storage case	8700.0795	Shut-off hose 12 bar / 2m / yellow / rubber	8700.1357
Regulator c/w 2m black rubber inlet hose	8700.0570	Shut-off hose 12 bar / 2m / green / rubber	8700.1362
Handheld dual controller 12 bar	8700.0552	Shut-off hose 12 bar / 2m / blue / rubber	8700.1367
Dual air cylinder connector	8700.0620	Connector key	8700.2008
Delivery hose 12 bar / 10m / red / rubber	8700.1333	Solid quick connector	8700.2050
Delivery hose 12 bar / 10m / yellow / rubber	8700.1338	Power Plate	8420.0060
Delivery hose 12 bar / 10m / green / rubber	8700.1343	Power Plate plug	8700.2075
Delivery hose 12 bar / 10m / blue / rubber	8700.1348	Floor mat	8700.0715
		Floor mat plug	8700.2040



Information contained in this document is believed to be accurate. However RESQTEC does not guarantee the completeness or accuracy of any of the published information.