

Technical specifications

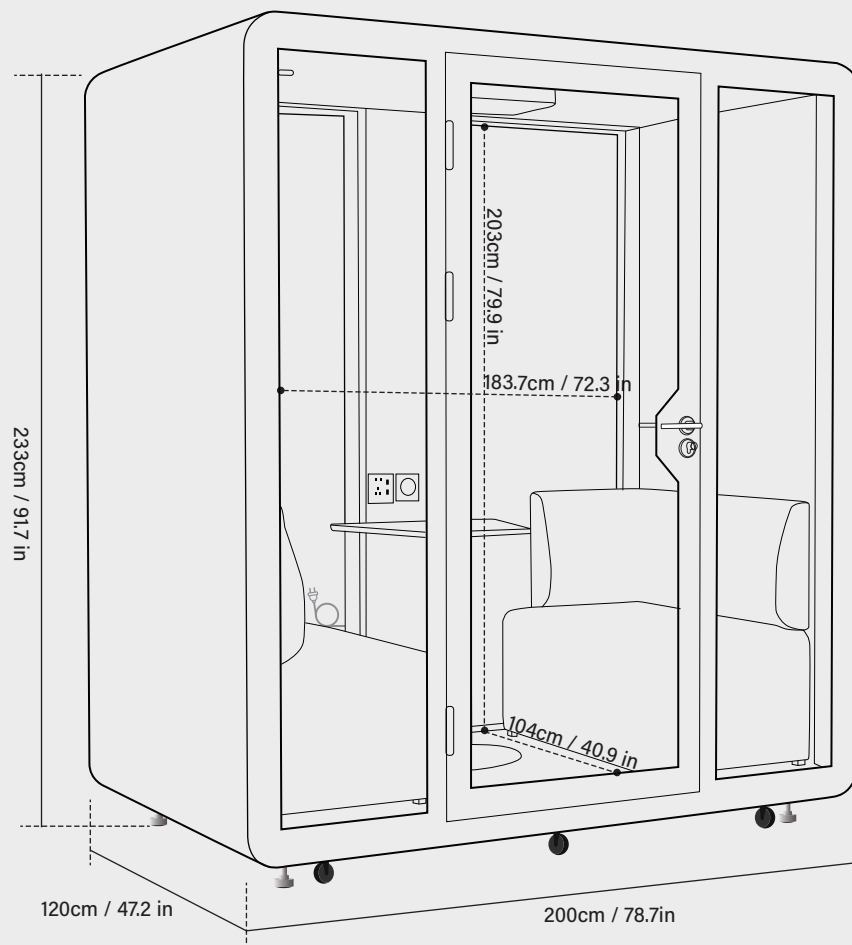

Performance



Speech level reduction: 30.9dB
Maximum airflow: 63Times/HLow
energy consumption: 36W

Sustainable design

Built to last for decades
Mobility-Ready Wheel Casters
Stainless Steel Frame Structure




DIMENSIONS TOP EXTERIOR/FIRE SUPPRESSION OPENING & FANS

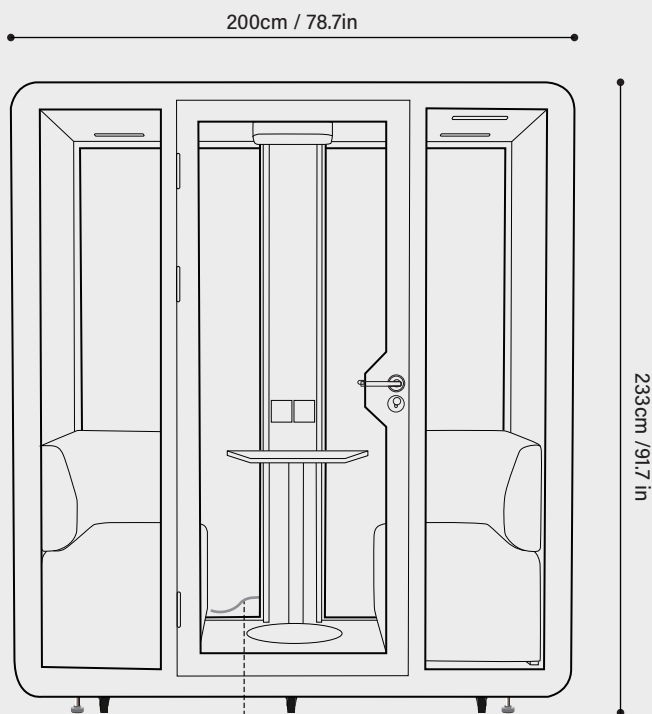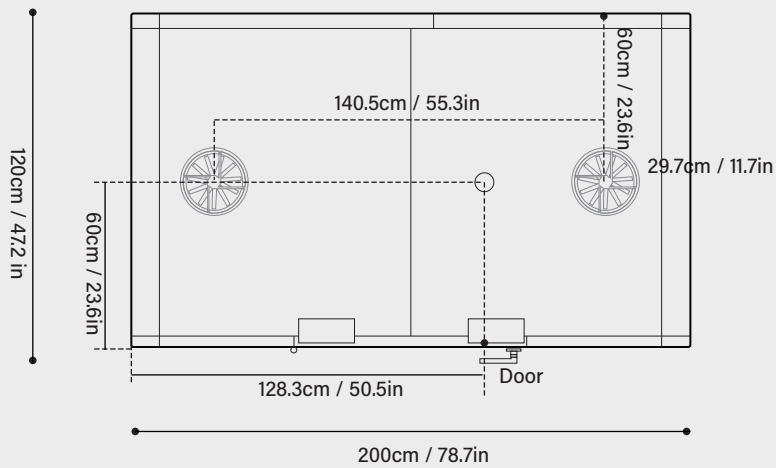


Optional floor power outlet


DIMENSIONS /OPERATING SPACE SIDE VIEW

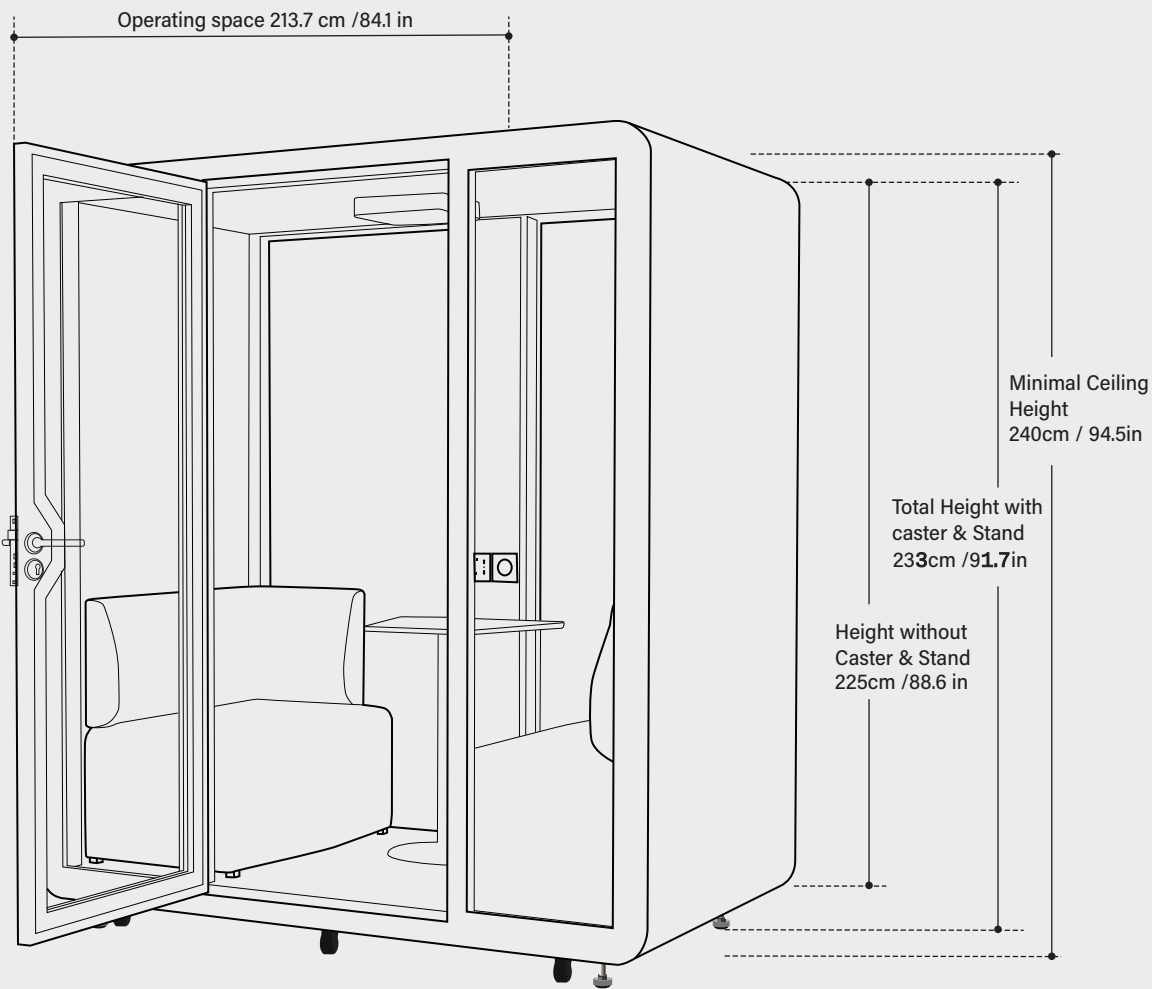



DIMENSIONS /OPERATING SPACE FRONT VIEW

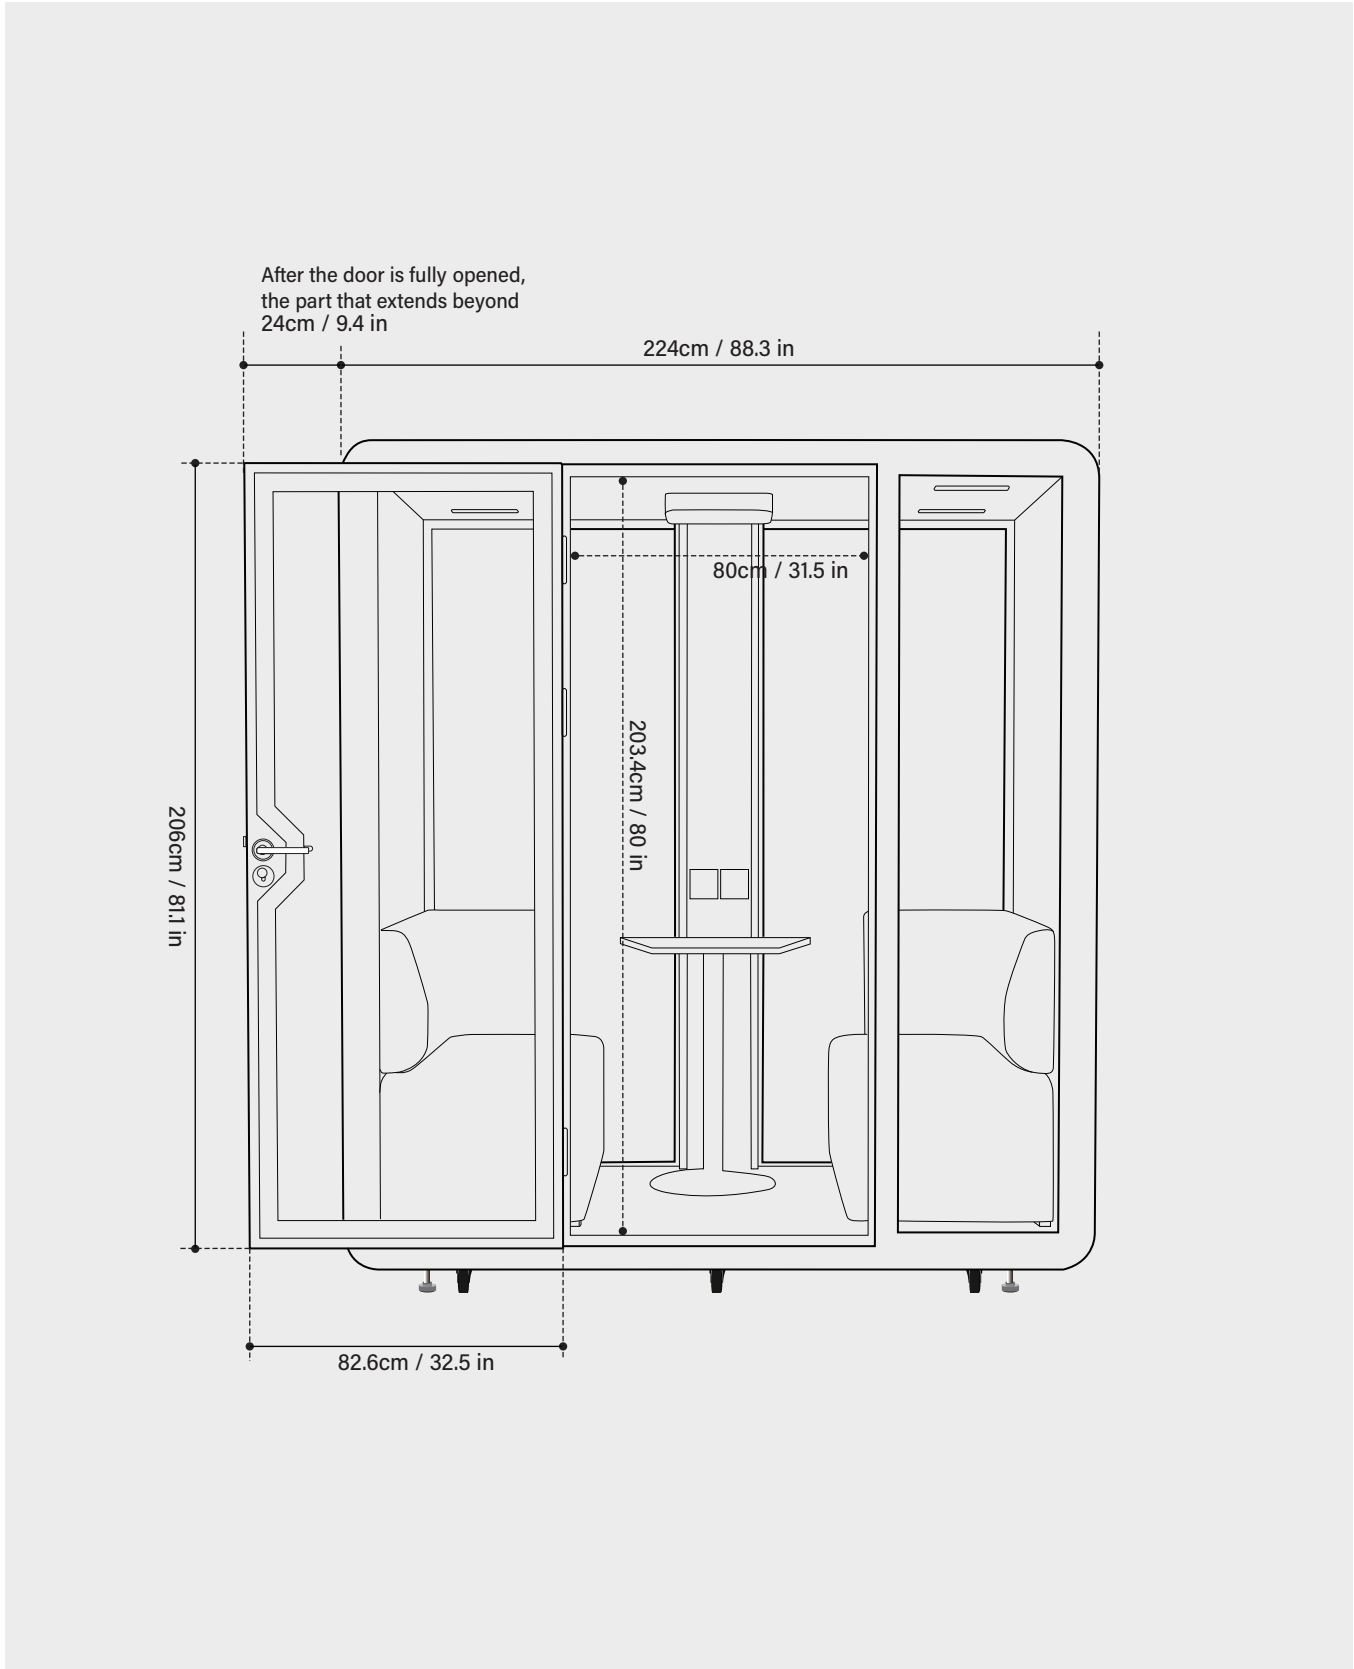


DIMENSIONS / TOP VIEW INTERIOR

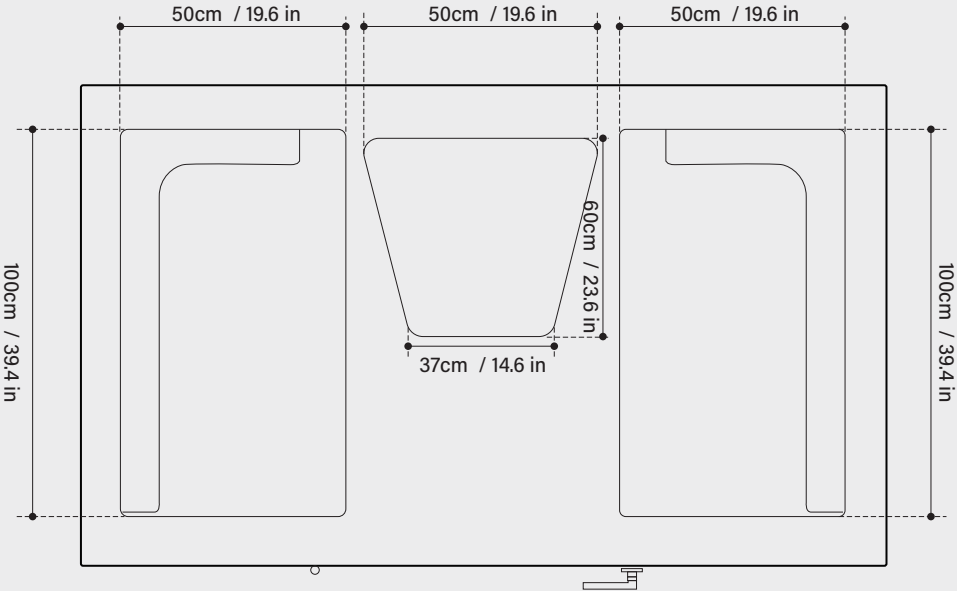

SEISMIC ANCHOR

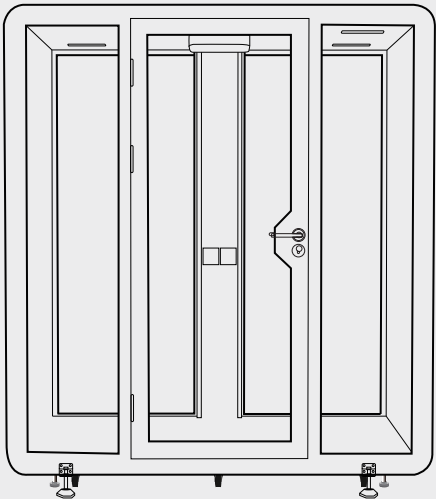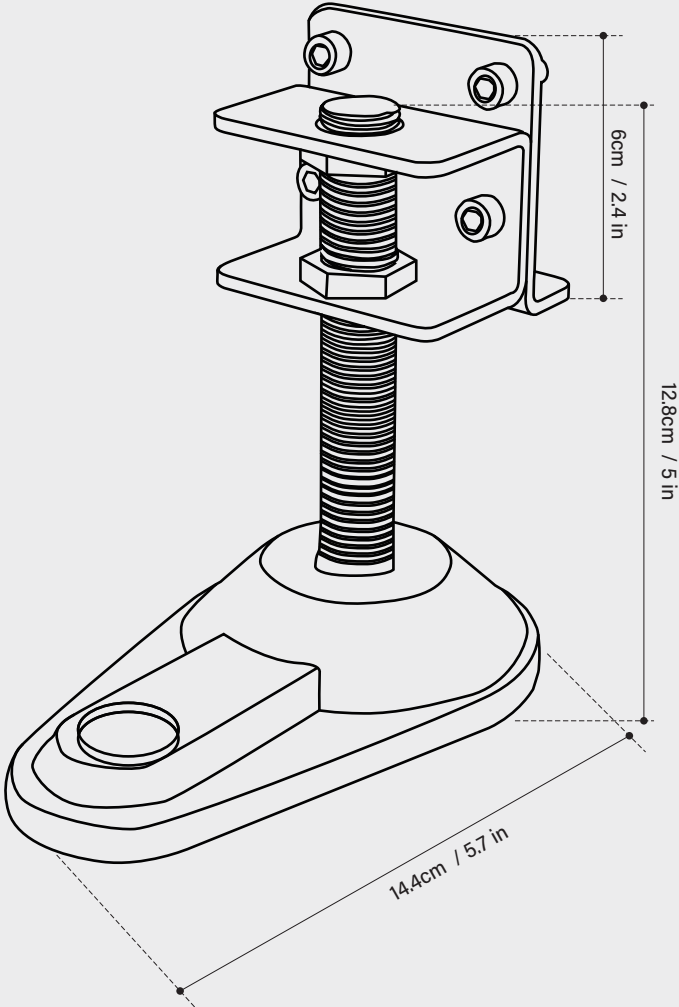

Front View of Seismic Anchor Installed

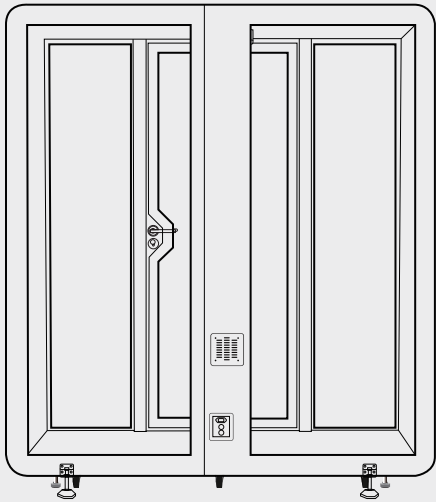

Back View of Seismic Anchor Installed