


WIRE ROPE WINCH BODY + ROPE

Lifting Capacity	Pulling Capacity	Lever Pull at Rated Load	Forward Travel	Rope Ø	Net Weight			Dimensions		
					Body	SWR 20 m	Lever Handle	L	W	H
[t]	[t]	[N]	[mm]	[mm]	[kg]	[kg]	[kg]	[mm]	[mm]	[mm]
5.4	8.1	850	25	20	58	36	3.7	940	70	255
5.4	8.1	850	25	20	58	36	3.7	940	100	295
3.2	4	441	28	16	23.3	23.5	2.5	675	120	350
5.4	8.1	850	25	20	58	36	3.7	940	170	440



HAND CABLE PULLER

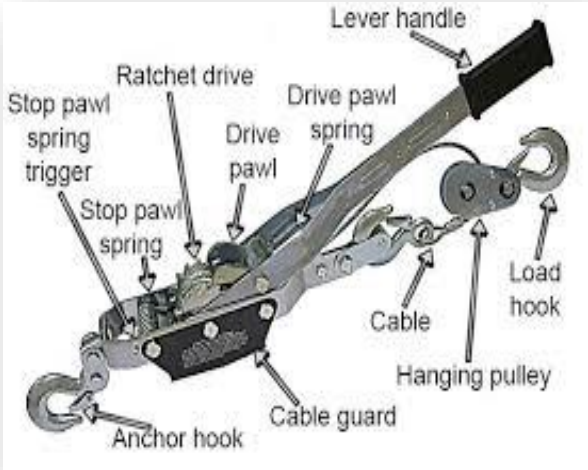

Tons	Meters
1.0	1.8
2.0	2.2
3.0	2.2
4.0	3.0



HAND WINCHES

Hand Winches are used for hauling or lifting light loads, with pulling capacities ranging from 386 to 1136 kg of Pulling Force. They are designed for dead-load pulls and have a maximum gradient of 1 in 5. Models fitted with a disc brake system are suitable for lifting purposes.

