


taylor.

PRODUCED BY

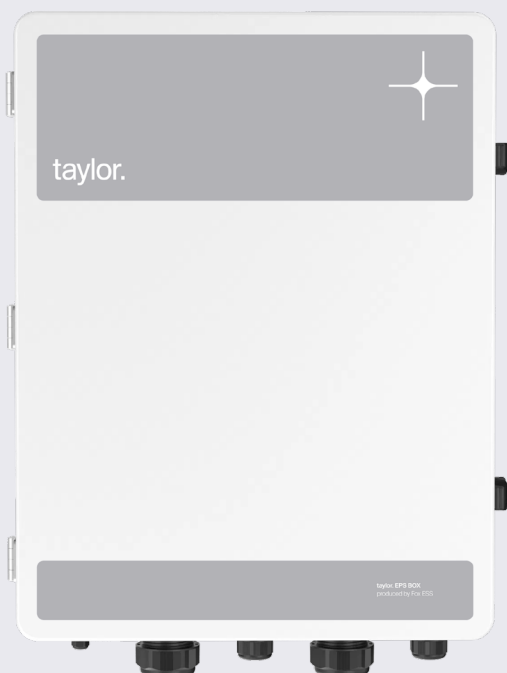

EPS Box SP single-phase

Tested and supported (1st/2nd line) by Taylor

Automatically switch to on-grid / off-grid state

PC, robust metal enclosure IP65

Compatible with Taylor H1-G2 / H1-G2-WL inverters

taylor.solar



Model	EPS Box SP
Utility supply	
Rated voltage (VAC)	220 / 230 / 240, L / N / PE
Rated frequency (Hz)	50 / 60
Max. input current (per phase) (A)	100
Inverter grid	
Rated voltage (VAC)	220 / 230 / 240, L / N / PE
Rated frequency (Hz)	50 / 60
Max. input current (per phase) (A)	63
Inverter EPS & Inverter 2	
Rated voltage (VAC)	220 / 230 / 240, L / N / PE
Rated frequency (Hz)	50 / 60
Max. input current (per phase) (A)	63
Load	
Rated voltage (VAC)	220 / 230 / 240, L / N / PE
Rated frequency (Hz)	50 / 60
Max. input current (per phase) (A)	100
Communication interface	
RS-485	Meter
General data	
Cooling concept	Natural
Installation	Wall-mounted
Operating temperature range (°C)	-25 ~ 60
Dimensions (W x H x D) (mm)	550 x 420 x 138.5
Dimensions of packaging (W x H x D) (mm)	660 x 515 x 235
Net weight (kg)	16
Gross weight (kg)	19.3
Ingress protection	IP65
Warranty	
Product Warranty	10 years (backed by FOX ESS)