




# S-T2/A2

Signal Line EMI Filter

## 1. Dimensions (mm)

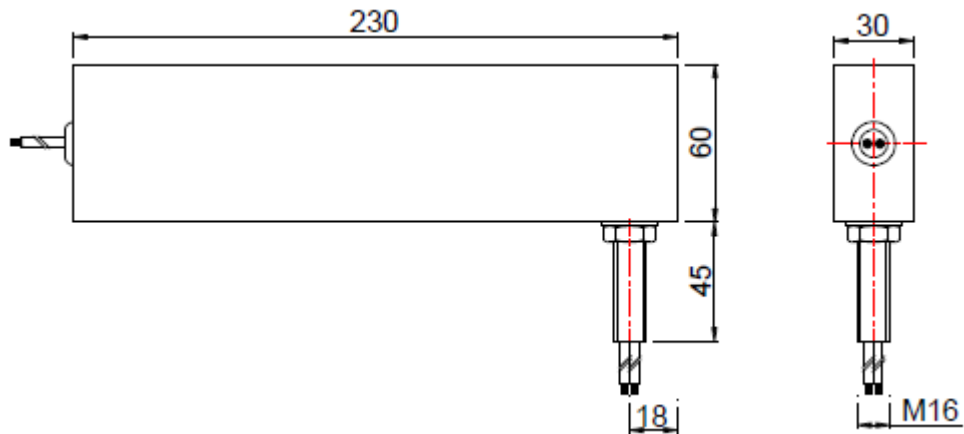

## 2. Specifications


<b>Rated Voltage</b>	95VAC / 125VDC
<b>Pass Band</b>	0-20kHz
<b>Rated Current</b>	0.3A
<b>Shielding Effectiveness</b>	100dB, 14kHz-40GHz
<b>Climatic Category</b>	25/085/21
<b>Hipot Test</b>	1200VDC, 2 SEC

## 3. Typical Applications

Telephone, fax.



## 4. Installation Diagram

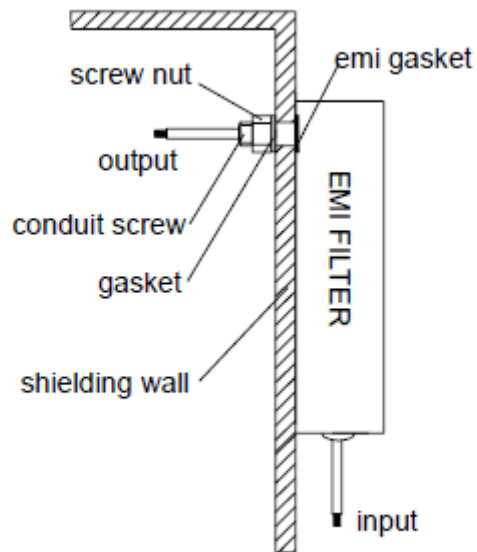

## 5. Accessories List

- ① M16 Conduit Screw: 1pc
- ② Gasket 16: 1pc
- ③ M16 Screw Nut: 1pc
- ④ EMI Gasket 16: 1pc
- ⑤ Certificate: 1pc