

GOODWE · SEMS APP

Wifi Reconnection Guide

Use this guide if your GoodWe inverter has a Wi-Fi 1.0 dongle (Solar-WiFi network). Allow about five minutes near the inverter.

About 5 minutes

SEMS Portal app

STEP-BY-STEP

1 Turn off Mobile Data

START HERE

Open Settings and switch Mobile Data off so it doesn't interfere with the direct connection.




2 Connect to Solar-WiFi

Join the network Solar-WiFiXXXXXXXX (last 8 digits = your inverter serial). Password: 12345678. 'No internet' is normal.




3 Open SEMS and tap Network Link

Open the SEMS Portal app and tap Network Link at the bottom-right of the login screen.

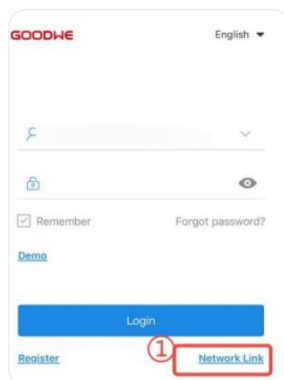

4 Tap Search Device

On the WLAN tab, tap Search Device. When your inverter appears, tap to select it.

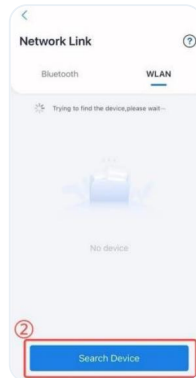


5 Tap WLAN/LAN

On the next screen, tap WLAN/LAN to open the router connection settings.



6 Enter your home WiFi details

Select your home network, choose the encryption method, and enter your WiFi password. Leave DHCP on.

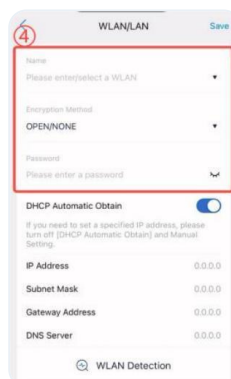

7 Tap Save and confirm

Tap Save in the top-right. Once SEMS confirms the connection, disconnect from Solar-WiFi and turn Mobile Data back on.

✓ **FINISHED**