

# SafeTest

## PR Series

### Technical Data Sheet



Maximise  
Safety



Eliminate  
Live Work



Wireless up to  
100m (328ft)



Purpose Built for  
Heavy Industry



#### Overview

The **SafeTest PushRod (PR)** enables wireless measurement of displacement.

It removes technicians from the live work area, greatly reducing the risk of injury and improving efficiency.

#### Applications

- Diagnostics and fault finding
- Measure part wear and tear
- Measure deflection

#### Features

- Measures displacement with a resolution of 0.05mm
- Zero button
- 50m Bluetooth Range
- Compatible with Wireless MultiTool and MultiTool Pro
- Connect upto 12\* sensors simultaneously

\*only on MultiTool Pro

### Specifications:

Electrical	
Power connector	DC barrel jack
Battery technology	Internal NiMH (Nickel Metal Hydride) pack
Battery life cycle	1000 cycles
Charging	Charge only with SafeGauge charging case
Charging time	4 hours
Operating time	15 hours
Cable Length	500mm




Mechanical	
Weight	180g
Housing material	Communication box: ABS plastic Sensor: Aluminium housing with stainless steel shaft
Ingress protection	IP67
Accuracy	+/- 0.05mm
Mounting options	• Magnetic mounting plates on communication box and each end of the sensor. • Fixes to any (ferrous) metal surface.
Measurement span	50mm

Communication	
Communication type	Bluetooth low energy 2.4GHz
Maximum range	Up to 100m
Simultaneous sensor connections	• Wireless MultiTool: 7 paired sensors • MultiTool Pro: 12 sensors

Environmental	
Battery disposal	When finished with a SafeGauge product please return to SafeGauge Pty Ltd for correct recycling, or follow your local area laws and guidelines for correct battery disposal.

DISCLAIMER - While every effort has been made to ensure the accuracy of this document at the date of issue, SafeGauge assumes no liability resulting from any omissions or errors in this document, and reserves the right to revise content at any time.

### Dimensions

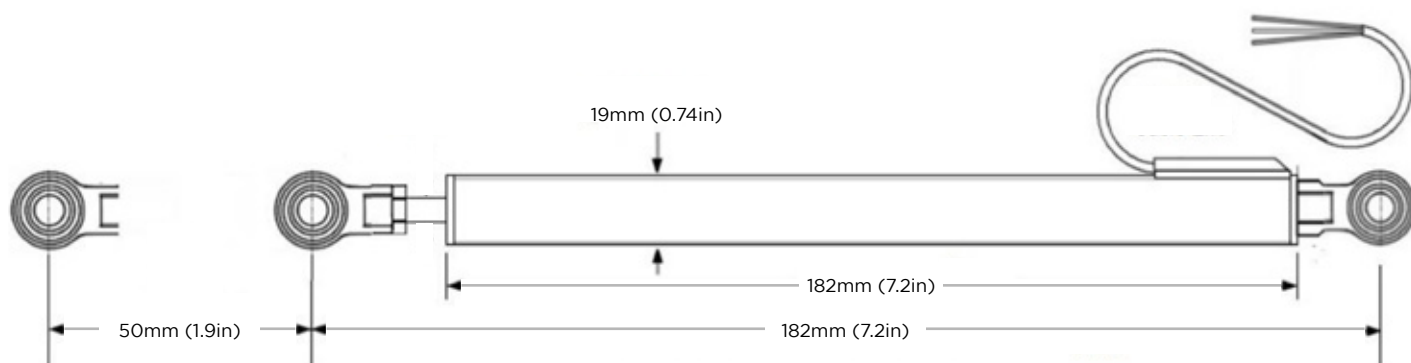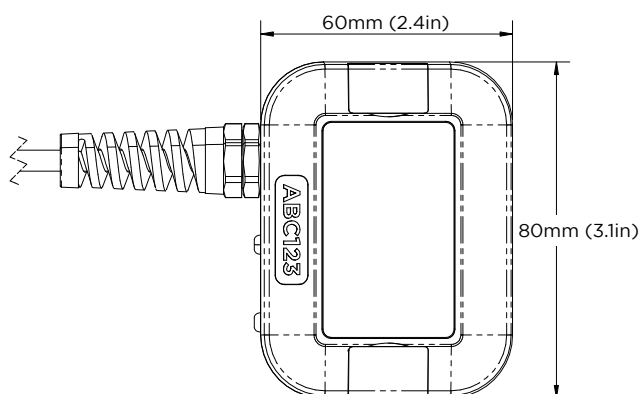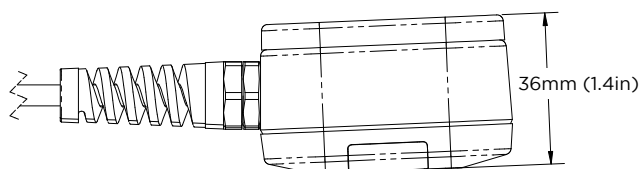

DISCLAIMER - While every effort has been made to ensure the accuracy of this document at the date of issue, SafeGauge assumes no liability resulting from any omissions or errors in this document, and reserves the right to revise content at any time.