

WIZPLUS



SMALL ELECTRIC SCISSOR LIFT PLATFORM(UNIVERSAL WHEEL)

Model: CKJC-EW Series

Standard Models Available in Stock	Ships in 20-30 Days	FCL Sea Freight Preferred
------------------------------------	---------------------	---------------------------

The Small Electric Scissor Lift Platform with Universal Wheel is designed for efficient indoor operation in confined spaces. Its compact 800 mm width, 360° omni-directional movement, and quiet electric drive provide excellent maneuverability for warehouses, retail stores, office buildings, and facility maintenance.

VOLTAGE	LIFT MOTOR
12V DC	12V 1.6KW
HYDRAULIC TANK	BATTERY
4 L	1*12V 60Ah
CHARGER	
12V 15A	


STANDARDS & CERTIFICATIONS

CE	ANSI	ISO 9001 QMS
----	------	--------------

Dimensions

	CKJC0503EW	CKJC0604EW	CKJC0705EW
Safe working load (kg)	300	300	300
Maximum number of passengers	1	1	1
Maximum allowable manual force (N)	200	200	200
Extension platform load (kg)	113	113	113
Maximum allow able machine tilt	1.5°/3°	1.5°/3°	1.5°/3°
Rise and fall time (s)	15-17	15-17	20-25
Maximum travel speed(lowered/raised) (km/h)	4.0/0.5	4.0/0.5	4.0/0.5
Climbing ability (%)	25	25	25
Minimum ground clearance (mm)	50	50	50
Machine weight (kg)	570	620	690

WIZPLUS

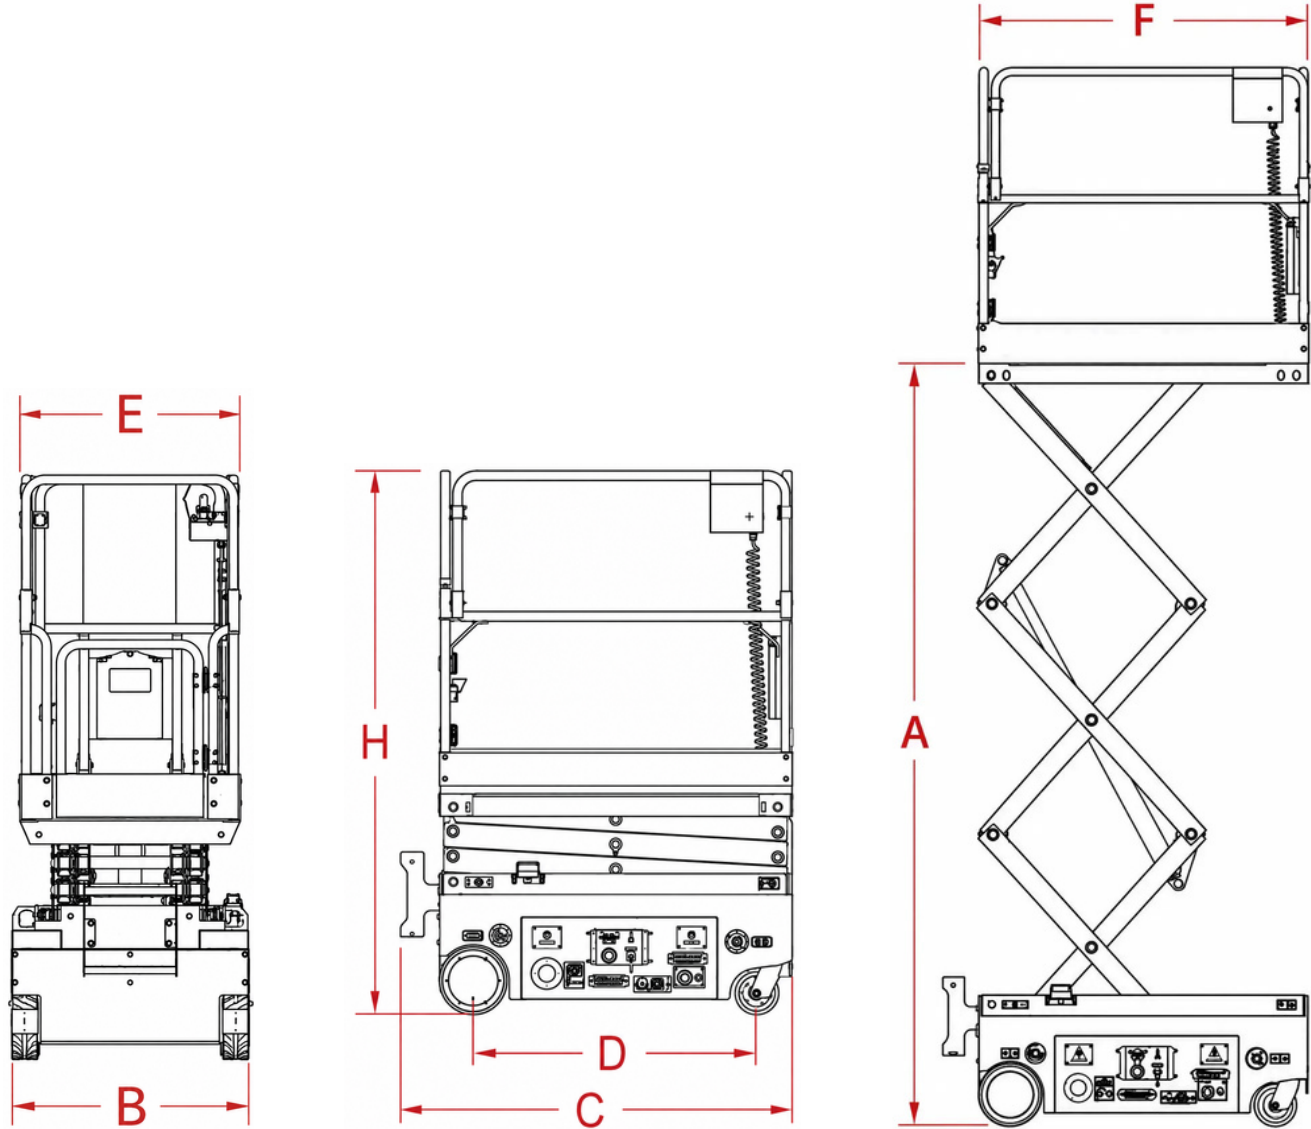

■ SPECIFICATIONS

Maximum Working Height (mm)	5000-6800
Maximum Platform Height (mm)	A 3000-4800
Overall length (including pedals) (mm)	C 1330-1350
Overall length (excluding pedals) (mm)	1200
Overall Height (mm)	H 1850-2020

Platform Length (mm)	F 1200
Platform Width (mm)	E 700
Wheelbase (mm)	D 1100
Electric drive wheel track (mm)	B 670
Universal wheel track (mm)	630

WIZPLUS

Feature 01

Responsive Platform Joystick Control

The ergonomic joystick controller integrates function switches, status indicators and an emergency stop button for precise, responsive and safe platform operation.



Feature 02

Convenient Ground-Level Control

The lower control panel integrates operating switches, status indicators and an emergency stop button for convenient ground-level operation, inspection and emergency control.



Feature 03

Reinforced Safety Guardrail

The full-height steel guardrail features a reinforced structure and secure access gate, providing reliable protection and a safer elevated working environment.



Feature 04

Smooth and Flexible Mobilit

The heavy-duty swivel casters provide smooth movement and flexible steering, allowing the equipment to be easily repositioned in narrow or confined working areas.

