





FLAT

INSTALLATION INSTRUCTIONS FOR SIDE, UP&DOWN LIT

SIDE LIT

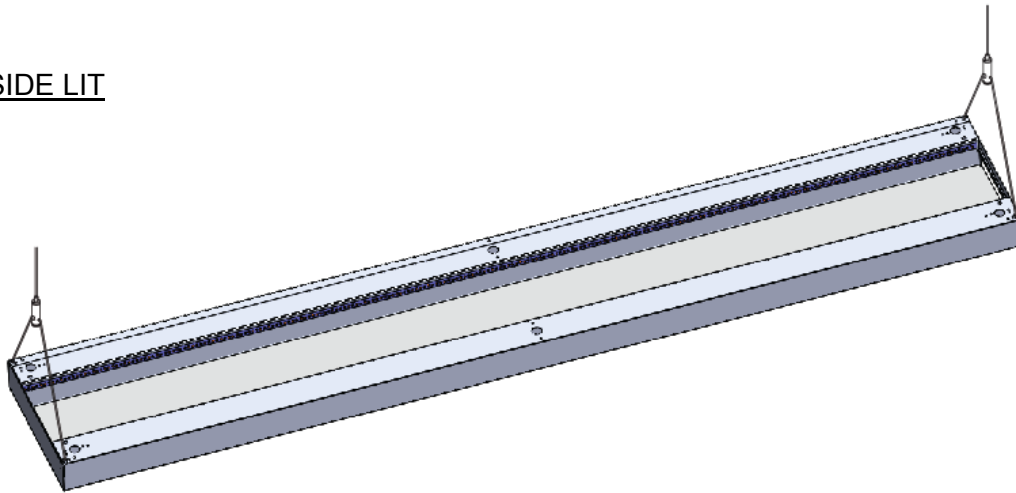


UP & DOWN LIT

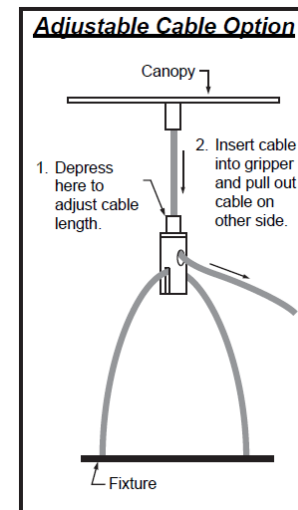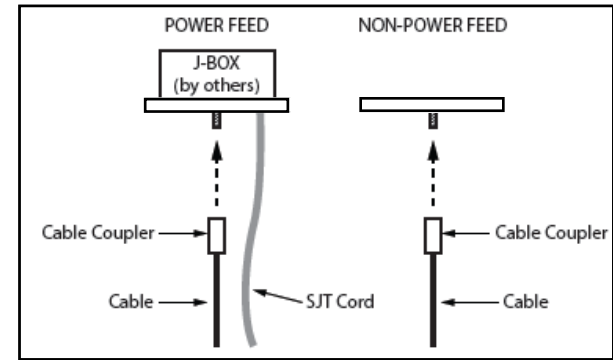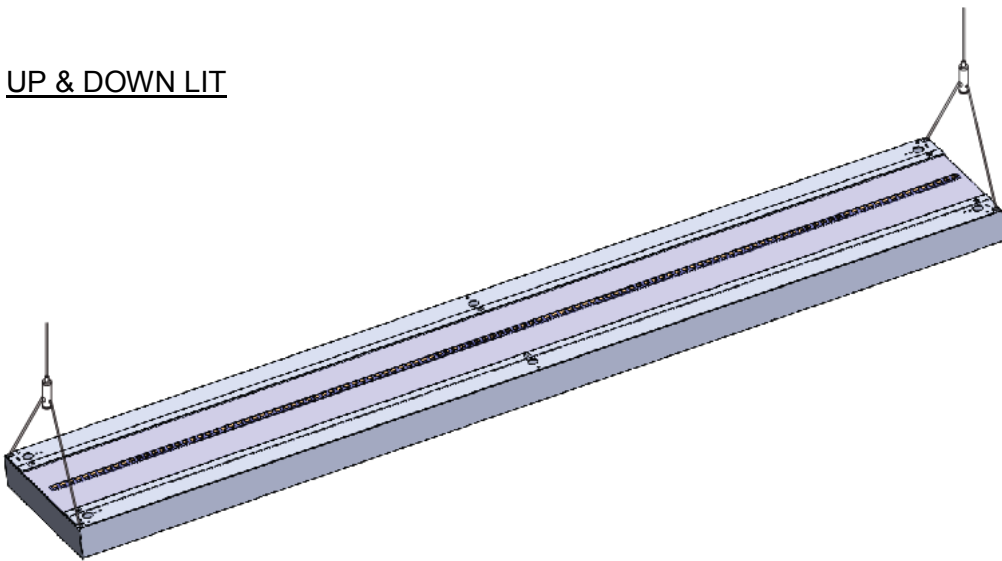


* Only the first 4FT or 8FT of one-piece fixture requires 2 aircraft cables on both end; the rest of continuous run requires minimum of 1 aircraft cable.

1. Suspend mount fixtures in numerical order keeping the same alphabet family.
2. Remove 6pcs of screws per 4FT and put aside the module plates and lens.




SIDE LIT


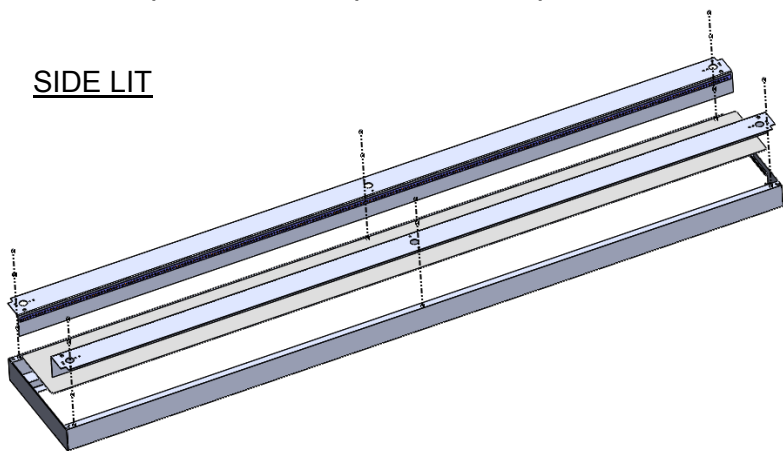


UP & DOWN LIT

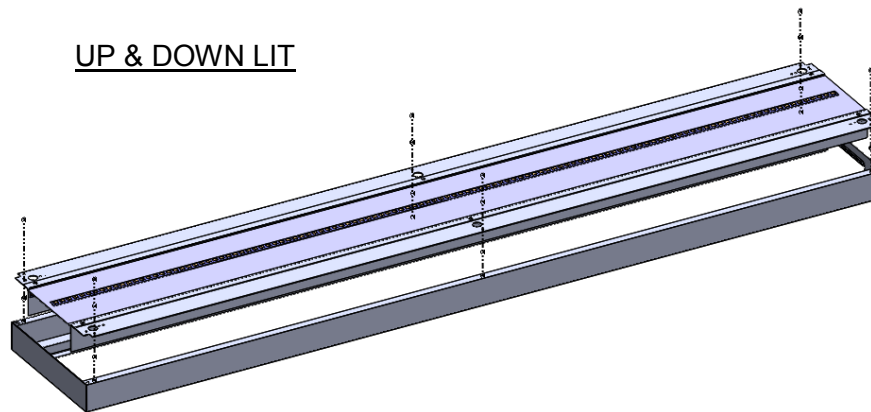

3. Align the next continuous fixture, connect appropriate disconnectors with matching colored-wires, and use 4pcs of bolts and nuts to fix into continuous run.

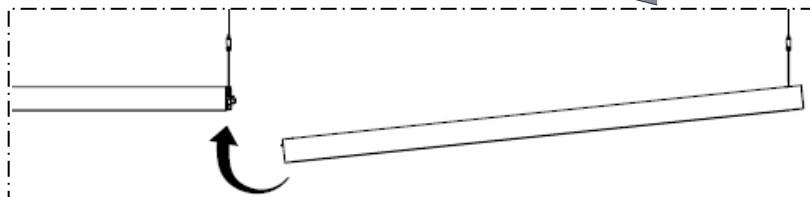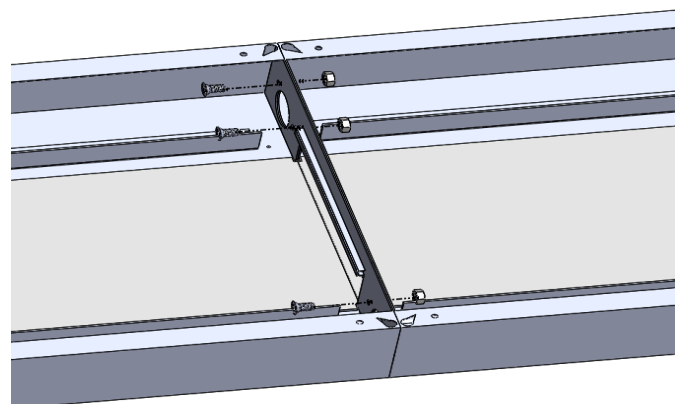
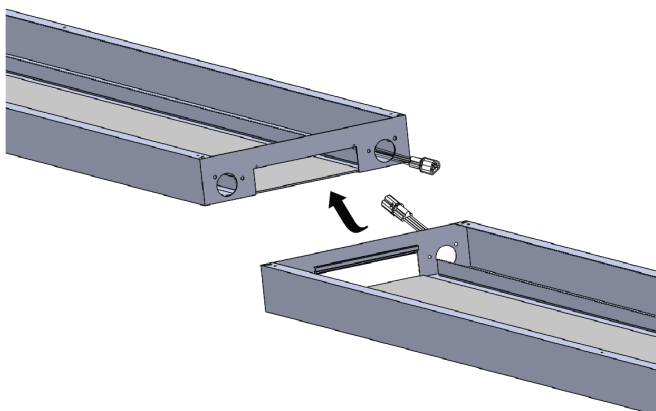


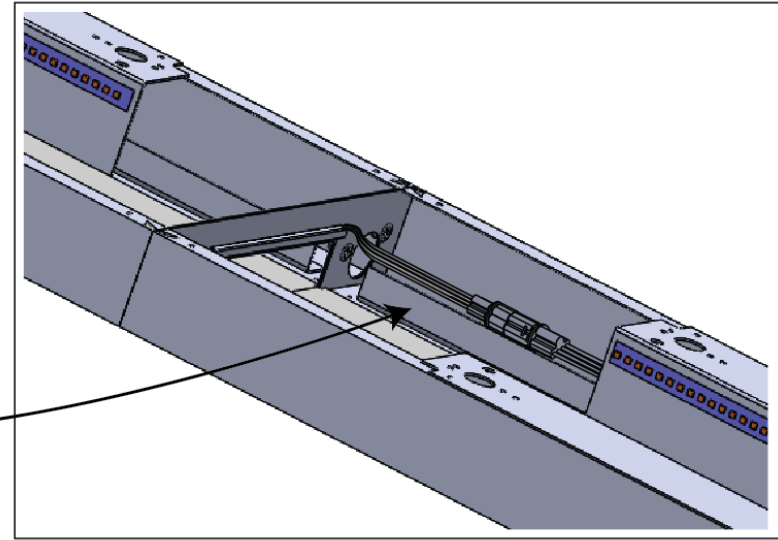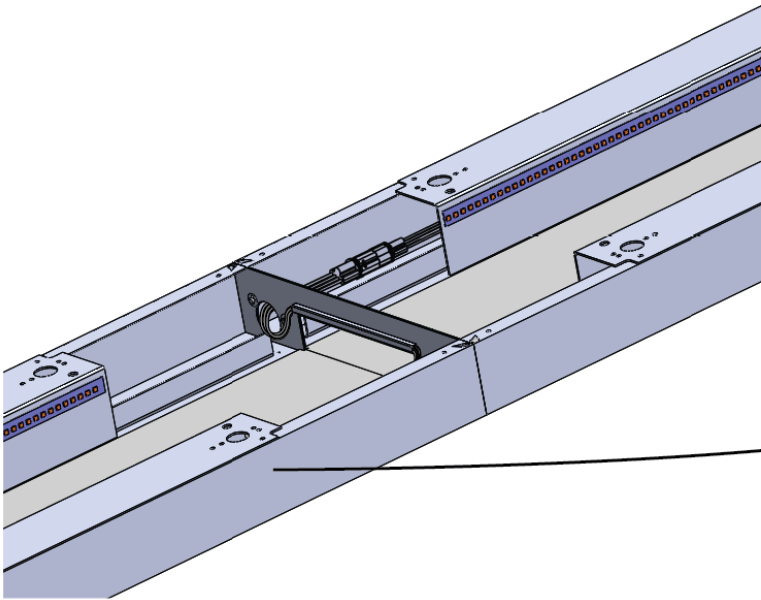


4. Lastly, reinstall module plates and lens to complete installation. Re-install module plates and lenses

SIDE LIT

UP & DOWN LIT

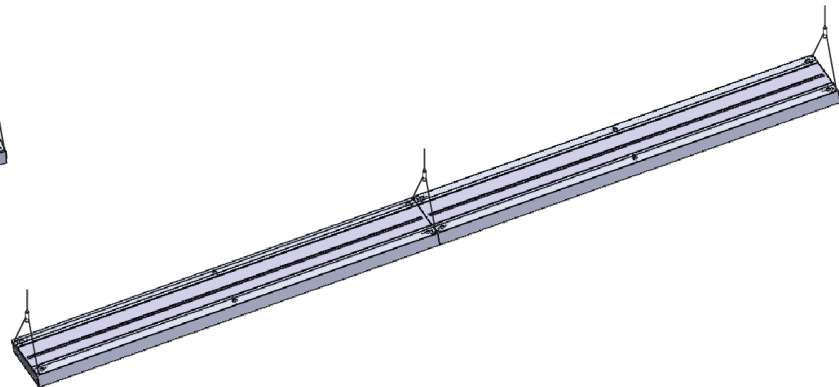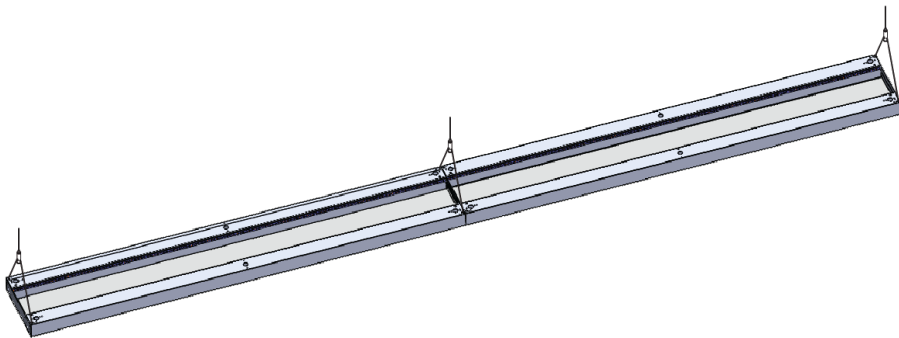

5. Level the runs by adjusting the Y-cable to complete installation.

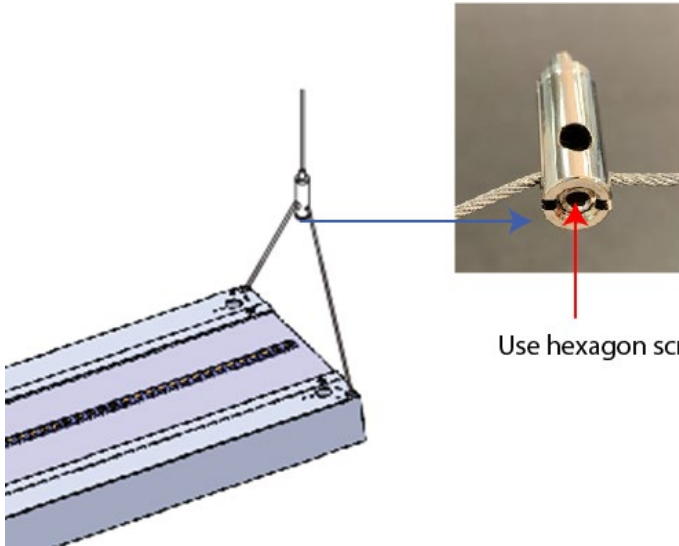

Use hexagon screwdriver to adjust the level.

Contractor is responsible for adequately reinforcing ceilings to support luminaire weight. Utopia Lighting accepts no responsibility for inadequately reinforced ceilings. The information contained in this drawing is the sole property of Utopia Lighting. Any reproduction in part or whole is prohibited and warranty is voided.

