


VIBRACAN

RCR

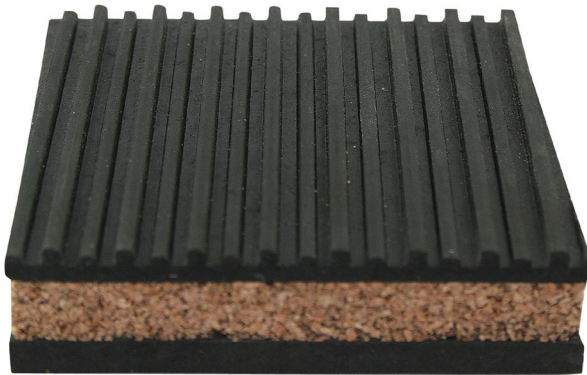

SIZE (IN.)	RATED LOAD
2 X 2	200
3 X 3	450
4 X 4	800
6 X 6	1800
12 X 12	7200
18 X 18	16000

RUBBER CORK RUBBER
THICKNESS, 7/8 INCHES

MODEL #: RCR
PRODUCT NAME: RUBBER CORK RUBBER

***DESCRIPTION :**

- *PADS ARE DESIGNED TO REDUCE PROBLEMS IN INDUSTRY CAUSED BY VIBRATIONS AND STRUCTURE NOISE. CORK WITH RUBBER PADS ON EITHER SIDE PROVIDES ADDITIONAL ISOLATION AND EXCELLENT GRIP.
- *ALTERNATE HIGH-LOW RIB CONSTRUCTION.
- *EXCELLENT SOUND ATTENUATION CAPABILITY.
- *SIMPLE FIELD INSTALLATION

***APPLICATION:**

- *WHERE BOLTING IS TO BE AVOIDED.
- *MINOR, NON*CRITICAL VIBRATION CONDITIONS.
- *USED FOR PUMPS, MOTORS, AC UNITS, GENERATORS ETC.
- *RECOMMENDED FOR ACOUSTIC PROBLEM APPLICATIONS.

NOTE

- *LOW DENSITY CORK BETWEEN NEOPRENE RUBBER. *WORKING RANGE: 15 TO 55 LBS/SQ.IN.

NOTE: *RESEARCH & DEVELOPMENT IS A CONTINUOUS PROCESS WITH US. AS IMPROVEMENTS ARE MADE FROM TIME TO TIME SPECIFICATIONS # DIMENSIONS MAY CHANGE WITHOUT NOTICE.
* TOLERANCES IN DIMENSIONS ARE AS PER INTERNATIONAL STANDARDS.

VIBRACAN